

Description

The DigiFlex® Performance™ (DP) Series digital servo drives are designed to drive brushed and brushless servomotors. These fully digital drives operate in torque, velocity, or position mode and employ Space Vector Modulation (SVM), which results in higher bus voltage utilization and reduced heat dissipation compared to traditional PWM. The drive can be configured for a variety of external command signals. Commands can also be configured using the drive's built-in Motion Engine, an internal motion controller used with distributed motion applications. In addition to motor control, these drives feature dedicated and programmable digital and analog inputs and outputs to enhance interfacing with external controllers and devices.

This DP Series drive features a single RS-232/RS-485 interface used for drive configuration and setup. Drive commissioning is accomplished using DriveWare® 7, available for download at www.a-m-c.com.

All drive and motor parameters are stored in non-volatile memory.

Power Range	•
Peak Current	100 A (70.7 A _{RMS})
Continuous Current	50 A (50 A _{RMS})
AC Supply Voltage	200 - 240 VAC
DC Supply Voltage	255 - 373 VDC





Features

- ▲ Four Quadrant Regenerative Operation
- Space Vector Modulation (SVM) Technology
- ✓ Fully Digital State-of-the-art Design
- Programmable Gain Settings
- Fully Configurable Current, Voltage, Velocity and Position Limits
- PIDF Velocity Loop

- ▲ PID + FF Position Loop
- Compact Size, High Power Density
- ▲ 16-bit Analog to Digital Hardware
- Built-in brake/shunt regulator
- On-the-Fly Mode Switching
- On-the-Fly Gain Set Switching

MODES OF OPERATION

- Current
- Position
- Velocity

COMMAND SOURCE

- PWM and Direction
- Encoder Following
- Over the Network
- ±10 V Analog
- 24V Step and Direction
- Sequencing
- Indexing
- Jogging

FEEDBACK SUPPORTED

- ±10 VDC Position
- Auxiliary Incremental Encoder
- Heidenhain EnDat®
- Stegmann Hiperface®
- Tachometer (±10 VDC)

INPUTS/OUTPUTS

- 3 High Speed Captures
- 4 Programmable Analog Inputs (16-bit/12-bit Resolution)
- 3 Programmable Digital Inputs (Differential)
- 7 Programmable Digital Inputs (Single-Ended)
- 4 Programmable Digital Outputs (Single-Ended)


COMPLIANCES & AGENCY APPROVALS

- RoHS
- UL/cUL Pending
- CE Pending





BLOCK DIAGRAM

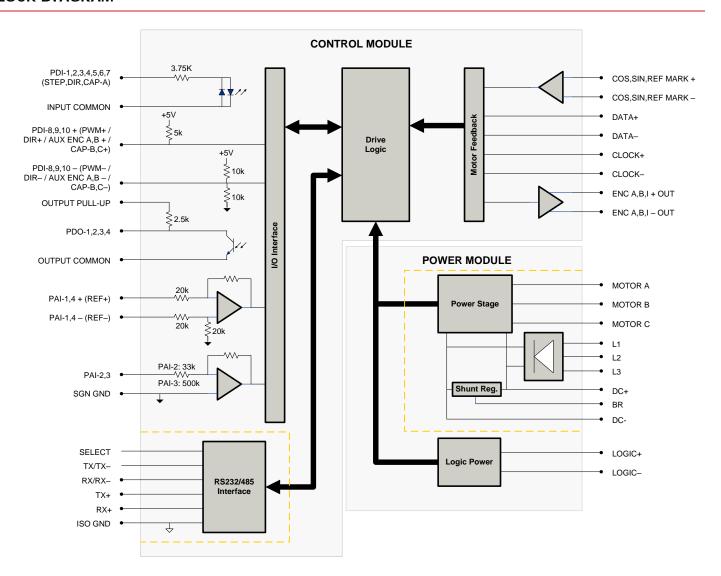

Information on Approvals and Compliances



RoHS (Reduction of Hazardous Substances) is intended to prevent hazardous substances such as lead from being manufactured in electrical and electronic equipment.





SPECIFICATIONS

	Power S	pecifications
Description	Units	Value
Rated Voltage	VAC (VDC)	240 (339)
AC Supply Voltage Range	VAC	200 - 240
AC Supply Minimum	VAC	180
AC Supply Maximum	VAC	264
AC Input Phases ¹	-	3
AC Supply Frequency	Hz	50 - 60
DC Supply Voltage Range ²	VDC	255 - 373
DC Bus Over Voltage Limit	VDC	429
DC Bus Under Voltage Limit	VDC	205
Logic Supply Voltage	VDC	20 - 30 (@ 850 mA)
Maximum Peak Output Current ³	A (Arms)	100 (70.7)
Maximum Continuous Output Current ⁴	A (Arms)	50 (50)
Max. Continuous Output Power @ Rated Voltage ⁵	W	16103
Max. Continuous Power Dissipation @ Rated Voltage	W	848
Internal Bus Capacitance	μF	1120
External Shunt Resistor Minimum Resistance ⁶	Ω	25
Minimum Load Inductance (Line-To-Line)7	μH	600
Switching Frequency	kHz	10
Maximum Output PWM Duty Cycle	%	100
Low Voltage Supply Outputs	-	+5 VDC (250 mA)
Low Vollage Supply Sulpulo	Control	Specifications
Description	Units	Value
Communication Interfaces	-	RS-485/232
	_	±10 V Analog, 24V Step and Direction, Encoder Following, Over the Network, PWM and Direction,
Command Sources	•	Sequencing, Indexing, Jogging ±10 VDC Position, Auxiliary Incremental Encoder, Heidenhain EnDat®, Stegmann Hiperface®,
Feedback Supported	-	Tachometer (±10 VDC)
Commutation Methods	-	Sinusoidal
Modes of Operation	-	Current, Position, Velocity
Motors Supported		Closed Loop Vector, Single Phase (Brushed, Voice Coil, Inductive Load), Three Phase (Brushless)
Hardware Protection	-	40+ Configurable Functions, Over Current, Over Temperature (Drive & Motor), Over Voltage, Short Circuit (Phase-Phase & Phase-Ground), Under Voltage
Programmable Digital Inputs/Outputs (PDIs/PDOs)	-	10/4
Programmable Analog Inputs/Outputs (PAIs/PAOs)	-	4/0
Primary I/O Logic Level	-	24 VDC
Current Loop Sample Time	μs	100
Velocity Loop Sample Time	μs	200
Position Loop Sample Time	μs	200
Maximum Sin/Cos Encoder Frequency	kHz	200
Maximum Sin/Cos Interpolation	-	2048 counts per sin/cos cycle
	_	Yes
Internal Shunt Regulator Internal Shunt Resistor	-	No
Internal Shunt Resistor		
Description	Units	I Specifications Value
Agency Approvals	-	RoHS, UL/cUL Pending, CE Pending
Size (H x W x D)	mm (in)	256.5 x 182.6 x 135.3 (10.1 x 7.2 x 5.3)
Weight	g (oz)	3560.7 (125.6)
Heatsink (Base) Temperature Range®	°C (°F)	0 - 75 (32 - 167)
Storage Temperature Range	°C (°F)	-40 - 85 (-40 - 185)
Form Factor		Panel Mount
Cooling System	-	Forced Convection
AUX ENCODER Connector		15-pin, high-density, male D-sub
COMM Connector	-	9-pin, female D-sub
FEEDBACK Connector	-	
	-	15-pin, high-density, female D-sub
I/O Connector	-	26-pin, high-density, female D-sub
+24V LOGIC Connector	-	2-port, 5.08 mm spaced, enclosed, friction lock header
FAN Connector	-	2-port, 5.08 mm spaced, enclosed, friction lock header
MOTOR POWER Connector	-	4-port, 10.16 mm spaced, enclosed, friction lock header
AC POWER Connector	-	4-port, 10.16 mm spaced, enclosed, friction lock header
DC POWER Connector	-	4-port, 10.16 mm spaced, enclosed, friction lock header

Notes

- Can operate on single-phase AC (208 VAC minimum) as long as output power does not exceed 3kW maximum. Current limits are de-rated to 30A cont. / 60A peak. Large inrush current may occur upon initial DC supply connection to DC Bus.

 Capable of supplying drive rated peak current for 2 seconds with 10 second foldback to continuous value. Longer times are possible with lower current limits. Continuous A_{min} value attainable when RMS Charge-Based Limiting is used.

 P = (DC Rated Voltage) * (Cont. RMS Current) * 0.95.

 ADVANCED Motion Controls recommends using an external fuse in series with an external shunt resistor. A 5 amp time delay fuse is typical. Lower inductance is acceptable for bus voltages well below maximum. Use external inductance to meet requirements.

 Additional cooling and/or heatsink may be required to achieve rated performance.





PIN FUNCTIONS

AUX ENCODER - Auxiliary Feedback Connector			
Pin	Name	Description / Notes	1/0
1	RESERVED	Reserved	-
2	RESERVED	Reserved	-
3	RESERVED	Reserved	-
4	PDI-8 + (PWM+ / AUX ENC A+ / CAP-B+)	Programmable Digital Input or PWM or Auxiliary Encoder or High Speed Capture (For	I
5	PDI-8 - (PWM- / AUX ENC A- / CAP-B-)	Single-Ended Signals Leave Negative Terminal Open)	I
6	PDI-9 + (DIR+ / AUX ENC B+ / CAP-C+)	Programmable Digital Input or Direction Input or Auxiliary Encoder or High Speed Capture	I
7	PDI-9 - (DIR- / AUX ENC B- / CAP-C-)	(For Single-Ended Signals Leave Negative Terminal Open)	
8	PDI-10 +	Programmable Digital Input (For Single-Ended Signals Leave Negative Terminal Open)	I
9	PDI-10 -	Programmable Digital input (For Single-Ended Signals Leave Negative Terminal Open)	I
10	SGN GND	Signal Ground	SGND
11	SGN GND	Signal Ground	SGND
12	SGN GND	Signal Ground	SGND
13	+5V OUT	+5V Encoder Supply Output (Short Circuit Protected)	0
14	PAI-4 +	Differential December Apple Institute (40 bit December)	
15	PAI-4 -	Differential Programmable Analog Input (12-bit Resolution)	I

COMM - RS232/RS485 Communication Connector			
Pin	Name	Description / Notes	1/0
1	SELECT	RS232/485 selection. Pull to ground (CN1-5) for RS485.	I
2	RS232 TX / RS485 TX-	Transmit Line (RS-232 or RS-485)	0
3	RS232 RX / RS485 RX-	Receive Line (RS-232 or RS-485)	I
4	RESERVED	Reserved	-
5	ISO GND	Isolated Signal Ground	IGND
6	RS485 TX+	Transmit Line (RS-485)	0
7	RESERVED	Reserved	-
8	RS485 RX+	Receive Line (RS-485)	I
9	RESERVED	Reserved	-

FEEDBACK - Feedback Connector			
Pin	Name	Description / Notes	1/0
1	COS+	Cosine Input	l l
2	COS -	Cosine input	I
3	SIN +	Sine Input	I
4	SIN -	Sille Iliput	I
5	SGN GND	Signal Ground	SGND
6	DATA-	Differential Data Line	I/O
7	DATA+	Dillerential Data Line	I/O
8	CLOCK+	Differential Clock Line	0
9	CLOCK-	Differential Clock Line	0
10	REF MARK +	Reference mark from sine/cosine encoder	1
11	RESERVED	Reserved	-
12	RESERVED	Reserved	-
13	+5V OUT	+5V Encoder Supply Output (Short Circuit Protected)	0
14	PAI-3	Programmable Analog Input (12-bit Resolution)	l l
15	REF MARK -	Reference mark from sine/cosine encoder	I





		I/O - Signal Connector	
Pin	Name	Description / Notes	1/0
1	PDO-1	Isolated Programmable Digital Output	0
2	OUTPUT COMMON	Digital Output Common	OGNE
3	PDO-2	Isolated Programmable Digital Output	0
4	PAI-1 + (REF+)	Differential Drogrammable Angles Input or Deference Cignal Input (46 bit Decelution)	I
5	PAI-1 - (REF-)	Differential Programmable Analog Input or Reference Signal Input (16-bit Resolution)	1
6	PAI-2	Programmable Analog Input (12-bit Resolution)	I
7	SGN GND	Signal Ground	SGNE
8	OUTPUT PULL-UP	Digital Output Pull-Up For User Outputs	I
9	PDI-5	Isolated Programmable Digital Input	I
10	PDO-3	Isolated Programmable Digital Output	0
11	PDI-1	Isolated Programmable Digital Input	I
12	PDI-2	Isolated Programmable Digital Input	I
13	PDI-3	Isolated Programmable Digital Input	I
14	PDO-4	Isolated Programmable Digital Output	0
15	INPUT COMMON	Digital Input Common (Can Be Used To Pull-Up Digital Inputs)	IGND
16	SGN GND	Signal Ground	SGNE
17	PDI-4 (STEP)	Isolated Programmable Digital Input or Step	I
18	PDI-6 (DIR)	Isolated Programmable Digital Input or Direction	I
19	PDI-7 (CAP-A)	Isolated Programmable Digital Input or High Speed Capture	I
20	ENC A+ OUT	Faculated Face des Observed A Outset	0
21	ENC A- OUT	Emulated Encoder Channel A Output	0
22	ENC B+ OUT	Emulated Encoder Channel B Outruit	0
23	ENC B- OUT	Emulated Encoder Channel B Output	0
24	ENC I+ OUT	Family to define the day Outside	0
25	ENC I- OUT	Emulated Encoder Index Output	
26	SGN GND	Signal Ground	SGNE

Logic Power Connector				
Pin	Pin Name Description / Notes I/O			
1	LOGIC GND	Logic Supply Ground	GND	
2	LOGIC PWR	Logic Supply Input	I	

	Fan Power Connector				
Pin	Pin Name Description / Notes I/O				
1	FAN GND	Fan Ground	GND		
2	FAN PWR	Fan Power Input	I		

	AC Power Connector			
Pin	Name	Description / Notes	1/0	
1	L1	AC Constitute of (There Blees) Fotografic delegation delegation and delegations	I	
2	L2	AC Supply Input (Three Phase). External 20 A time delay fuses are recommended in series with the AC input lines.	I	
3	L3	with the AC input lines.	I	
4	CHASSIS	Chassis Ground	CGND	

	DC Power Connector			
Pin	Name	Description / Notes	1/0	
1	GND	Power Ground	PGND	
2	DC+	DC Power Input	I	
3	DC+	External Shunt Resistor Connection, Connect resistor between DC+ and BR.	I	
4	BR	External Shart Resistor Connection. Connect resistor between DC+ and BR.	-	

	Motor Power Connector			
Pin	Name	Description / Notes	1/0	
1	CHASSIS	Chassis Ground	CGND	
2	MOTOR A	Motor Phase A	0	
3	MOTOR B	Motor Phase A	0	
4	MOTOR C	Motor Phase B	0	





HARDWARE SETTINGS

Switch Functions

Switch	Description	Set	ting
Switch	Description	On	Off
1	Bit 0 of binary RS-485 drive address. Does not affect RS-232 settings.	1	0
2	Bit 1 of binary RS-485 drive address. Does not affect RS-232 settings.	1	0
3	Bit 2 of binary RS-485 drive address. Does not affect RS-232 settings.	1	0
4	Bit 3 of binary RS-485 drive address. Does not affect RS-232 settings.	1	0
5	Bit 4 of binary RS-485 drive address. Does not affect RS-232 settings.	1	0
6	Bit 5 of binary RS-485 drive address. Does not affect RS-232 settings.	1	0
7	Bit 0 of drive RS-485 baud rate setting. Does not affect RS-232 settings.	1	0
8	Bit 1 of drive RS-485 baud rate setting. Does not affect RS-232 settings.	1	0

Additional Details

The drive can be configured to use the address and/or bit rate stored in non-volatile memory by setting the address and/or bit rate value to 0. Use the table below to map actual bit rates to a bit rate setting.

Baud Rate (kbps)	Value For Bit Rate Setting
Load from non-volatile memory	0
9.6	1
38.4	2
115.2	3





MECHANICAL INFORMATION

AUX ENCODER - Auxiliary Feedback Connector			
Connector Information 15-pin, high-density, male D-sub			
Mating Connector	Details	TYCO: Plug P/N 1658681-1; Housing P/N 5748677-1; Terminals P/N 1658686-2 (loose) or 1658686-1 (strip)	
· ·	Included with Drive	No	
	SGN GND 10 PDI-10 - 9 PDI-10 + 8 PDI-9 - (DIR-/AUX ENC B-/CAP-C-) 7 PDI-9 + (DIR+/AUX ENC B-/CAP-C-) 6 15 PAI-4 14 PAI-4 14 PAI-4 13 F5V OUT 12 SGN GND 11 SGN GND		

COMM - RS232/RS485 Communication Connector			
Connector Information 9-pin, female D-sub		9-pin, female D-sub	
Mating Connector	Details	TYCO: Plug P/N 205204-4; Housing P/N 5748677-1; Terminals P/N 1658540-5 (loose) or 1658540-4 (strip)	
ŭ	Included with Drive	No	
5 ISO GND 3 RS232 RX / RS485 RX- 2 RS232 TX / RS485 TX- 1 SELECT			

— 6 RS485 TX+

■ 8 RS485 RX+

FEEDBACK - Feedback Connector Connector Information 15-pin, high-density, female D-sub		
Connector information		TYCO: Plug P/N 748364-1; Housing P/N 5748677-1; Terminals P/N 1658670-2 (loose) or
Mating Connector	Details	1658670-1 (strip)
•	Included with Drive	No






		I/O - Signal Connector
Connector Information		26-pin, high-density, female D-sub
Mating Connector	Details	TYCO: Plug P/N 1658671-1; Housing P/N 5748677-2; Terminals P/N 1658670-2 (loose) or 1658670-1 (strip)
	Included with Drive	No
	SGI	PDI-1 11

Logic Power Connector		
Connector Information		2-port, 5.08 mm spaced, enclosed, friction lock header
Mating Connector	Details	Phoenix Contact: P/N 1757019
	Included with Drive	Yes
2 LOGIC PWR 1 LOGIC GND		

Fan Power Connector			
Connector Information 2-port, 5.08 mm spaced, enclosed, friction lock header		2-port, 5.08 mm spaced, enclosed, friction lock header	
Mating Connector	Details	Phoenix Contact: P/N 1757019	
	Included with Drive	Yes	
FAN PWR 1 FAN GND			

AC Power Connector		
Connector Information		4-pin, 10.16 mm spaced, enclosed, friction lock header
Mating Connector	Details	Phoenix Contact: P/N 1913523
	Included with Drive	Yes








DC Power Connector		
Connector Information		4-pin, 10.16 mm spaced, enclosed, friction lock header
Mating Connector	Details	Phoenix Contact: P/N 1913523
	Included with Drive	Yes
		4 BR 3 DC+ 1 DC-

MOTOR POWER - Motor Power Connector		
Connector Information		4-pin, 10.16 mm spaced, enclosed, friction lock header
Mating Connector	Details	Phoenix Contact: P/N 1913523
Mating Connector	Included with Drive	Yes
		4 MOT C 3 MOT B 2 MOT A 1 CHASSIS






MOUNTING DIMENSIONS

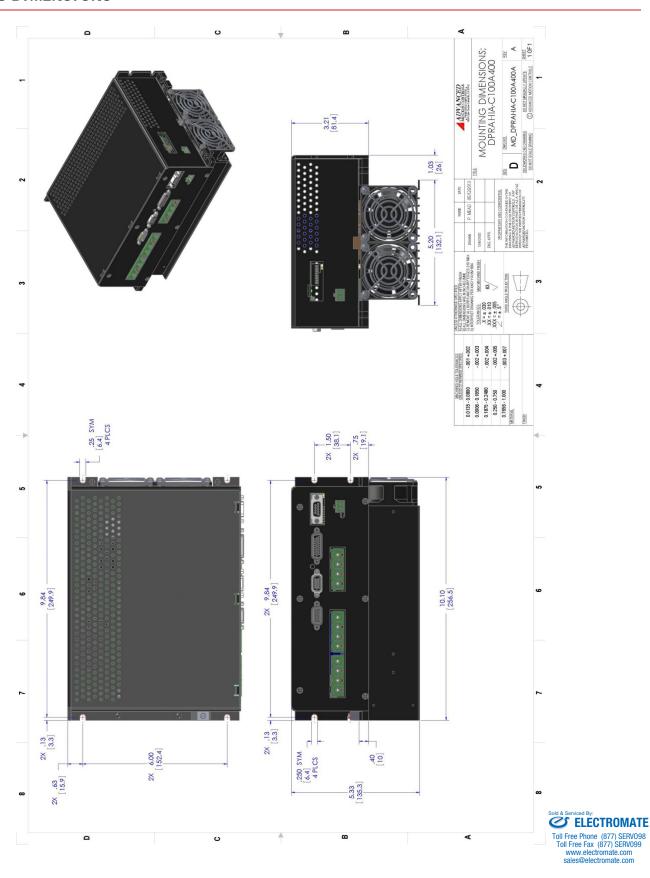



PART NUMBERING INFORMATION

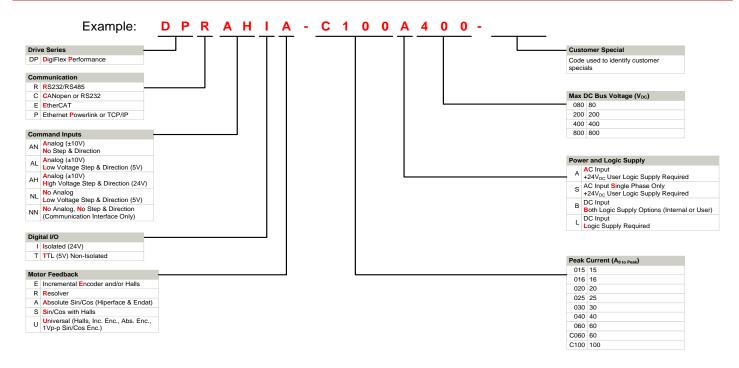

DigiFlex® Performance™ series of products are available in many configurations. Note that not all possible part number combinations are offered as standard drives. All models listed in the selection tables of the website are readily available, standard product offerings.

ADVANCED Motion Controls also has the capability to promptly develop and deliver specified products for OEMs with volume requests. Our Applications and Engineering Departments will work closely with your design team through all stages of development in order to provide the best servo drive solution for your system. Equipped with on-site manufacturing for quick-turn customs capabilities, ADVANCED Motion Controls utilizes our years of engineering and manufacturing expertise to decrease your costs and time-to-market while increasing system quality and reliability. Feel free to contact Applications Engineering for further information and details.


Examples of Customized Products

- Optimized Footprint
- ▲ Private Label Software
- ▲ OEM Specified Connectors
- ▲ No Outer Case
- ✓ Increased Current Resolution
- ▲ Increased Temperature Range
- ▲ Custom Control Interface
- ✓ Integrated System I/O

- ▲ Tailored Project File
- ▲ Silkscreen Branding
- Optimized Base Plate
- ▲ Increased Current Limits
- ▲ Increased Voltage Range
- Conformal Coating
- ▲ Multi-Axis Configurations
- Reduced Profile Size and Weight

Available Accessories

ADVANCED Motion Controls offers a variety of accessories designed to facilitate drive integration into a servo system. Visit www.a-m-c.com to see which accessories will assist with your application design and implementation.

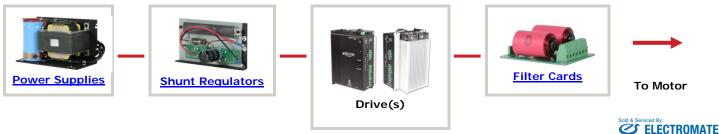

Toll Free Phone (877) SERV098 Toll Free Fax (877) SERV099

All specifications in this document are subject to change without written notice. Actual product may differ from pictures in this document.