

Description

The MC4XDZP01 mounting card is designed to host up to four DZE series DigiFlex® Performance™ digital servo drives in the following configuration:

- ▲ **'DxM' Configuration** – *ADVANCED* Motion Controls exclusive 'DxM' technology allows connectivity of up to 3 DZSANTU drives (sub-nodes) to a single DZEANTU (node) on an EtherCAT® network. DZSANTU drives receive commands from a DZEANTU over a high-speed communication interface, allowing for up to 4 axes of servo drive control from a single EtherCAT connection.

The MC4XDZP01 offers convenient quick-disconnect signal, feedback, and communication connectors. This mounting card is ideal for prototyping and integrating DZE digital servo drives into your machine.

Drive Compatibility


DZE and DZS Drive Models

80V Drive Models

- 40A
- 20A

175V Drive Models

- 20A

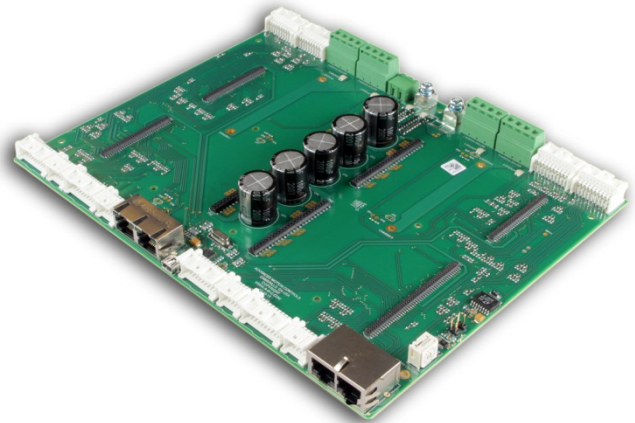

Features

- ▲ Mounts one DZEANTU and up to three DZSANTU DigiFlex® Performance™ Digital Servo Drives in an *ADVANCED* Motion Controls 'DxM' Configuration

DRIVES SUPPORTED

- 'DxM' Configuration (EtherCAT)
 - DZEANTU-020B080
 - DZSANTU-020B080
 - DZEANTU-040B080
 - DZSANTU-040B080
 - DZEANTU-020B200
 - DZSANTU-020B200


FEEDBACK SUPPORTED (DRIVE FIRMWARE DEPENDENT)

- Incremental Encoder
- Auxiliary Incremental Encoder
- Hall Sensors
- 1Vp-p Sine/Cosine Encoder
- Absolute Encoder (Heidenhain EnDat® or Stegmann Hiperface®)
- ±10 VDC Position
- Tachometer (±10 VDC)

COMPLIANCES & AGENCY APPROVALS

- RoHS

BLOCK DIAGRAM AND SPECIFICATION SUMMARY

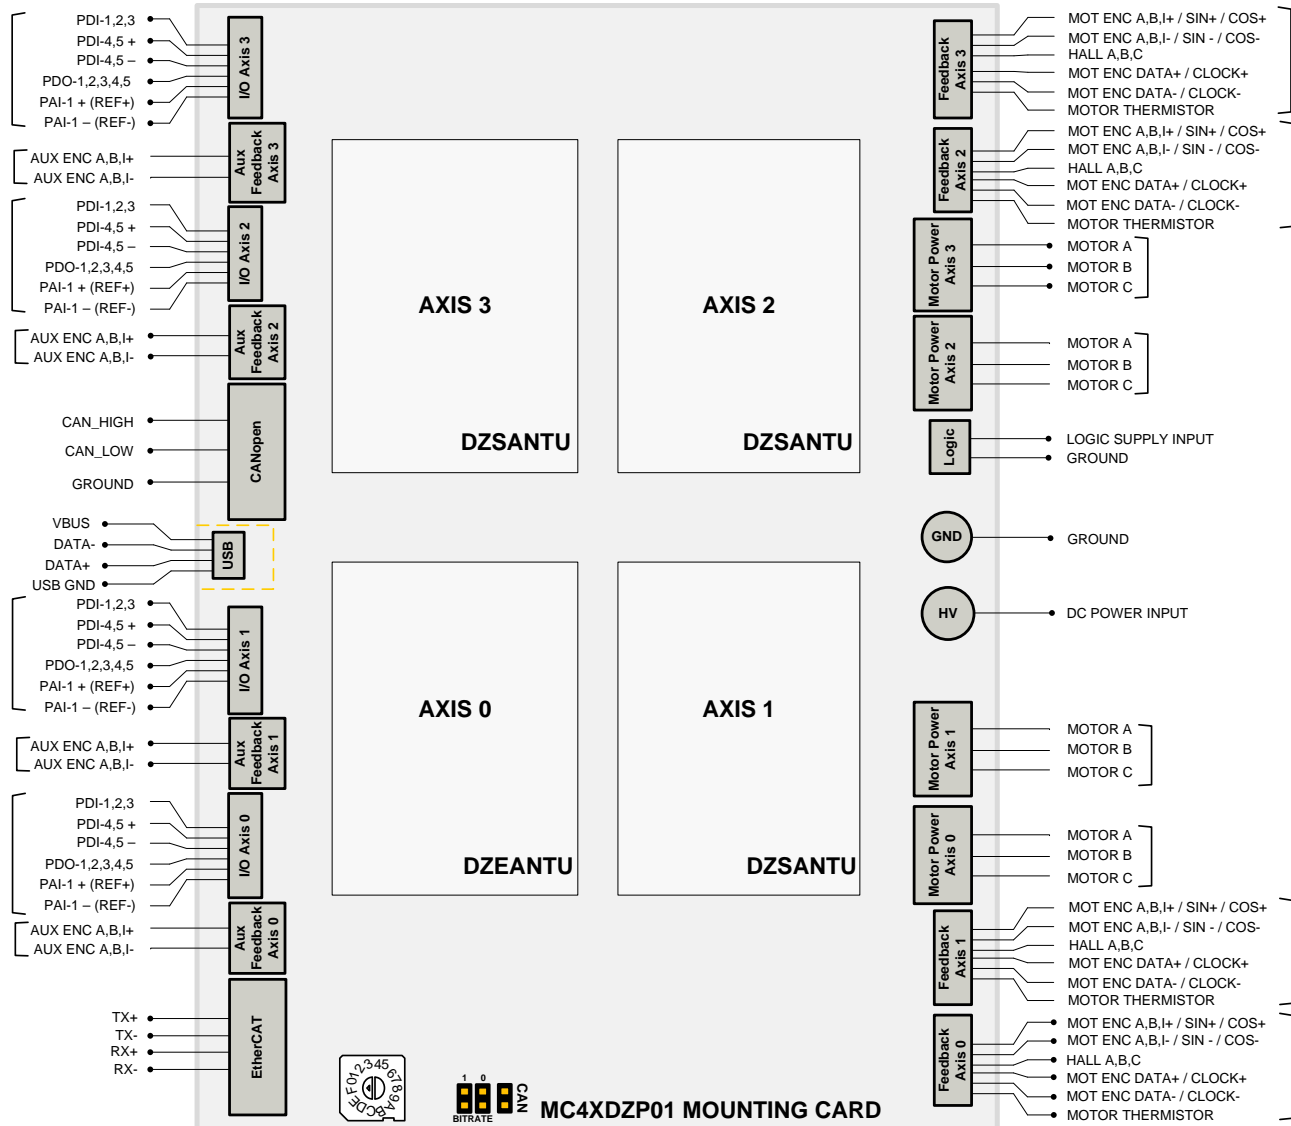

Mechanical Specifications

Mounting Signal Connectors (4): Mates Directly to Drive	96-port (Axis 0) / 68-port (Axis 1/2/3), 1.27mm spaced, dual-row socket
Mounting Power Connector (4): Mates Directly to Drive	50-pin, 2.0mm spaced, dual-row socket
Motor Power Connectors: MOTOR POWER 0/1/2/3	4-port screw terminal
Power Connector: HV	2 Individual threaded terminals
Auxiliary Logic Connector: LOGIC	2-port, 5.08 mm spaced, enclosed, friction lock header
EtherCAT Communication Connector: ETHERCAT IN/OUT	Shielded, dual RJ-45 socket with LEDs
CANopen Communication Connector: CANOPEN	Shielded, dual RJ-45 socket with LEDs
USB Connector: USB	5-pin, Mini USB B Type port
I/O Connectors: I/O 0/1/2/3*	20-pin, dual-row, 2.00 mm spaced plug terminal, horizontal mount
Auxiliary Feedback Connectors: AUX 0/1/2/3*	10-pin, dual-row, 2.00 mm spaced plug terminal, horizontal mount
Feedback Connectors: FB 0/1/2/3*	20-pin, dual-row, 2.00 mm spaced plug terminal, horizontal mount
Bus Capacitance	500 μF / 200V
Size (L x W x H) mm (in)	241.30 x 190.50 x 25 (9.5 x 7.5 x 0.98)
Weight	TBD


***Mating Connector Kit**

Mating connector housing and crimp pins can be ordered as a kit using **ADVANCED** Motion Controls part number **KC-MC4XDZP01**. This includes mating connector housing and crimp style contacts for the I/O, Feedback, and Auxiliary Feedback connectors. The **KC-MC4XDZP01** kit includes mating hardware for 1 axis only; to order mating hardware for all 4 axes, kit order quantity should be 4. The recommended tool for crimping the contacts is Molex part number **63811-6300**.


Network Configurations and Axis Population

The table below shows the configuration options and axis population requirements for the MC4XDZP01. Note that populating axes 1, 2, and 3 is not required. The MC4XDZP01 can operate as a node in an EtherCAT network with only a DZEANTU drive installed in the Axis 0 slot if desired. When operating the MC4XDZP01 in a multi-axis configuration, note that only Axis 0 and Axis 1 are used for two-axis control; Axis 0, Axis 1, and Axis 2 are used for three-axis control; and Axis 0, Axis 1, Axis 2, and Axis 3 are used for four-axis control.


	Single-Axis	Two-Axis	Three-Axis	Four-Axis
Network	Axis 0 (required)	Axis 1 (optional)	Axis 2 (optional)	Axis 3 (optional)
'DxM' Configuration (EtherCAT)	DZEANTU	DZSANTU	DZSANTU	DZSANTU

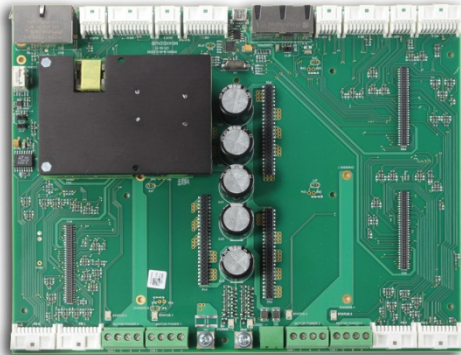


Single-Axis

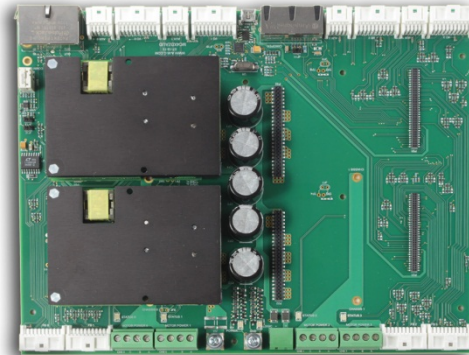

Two-Axis

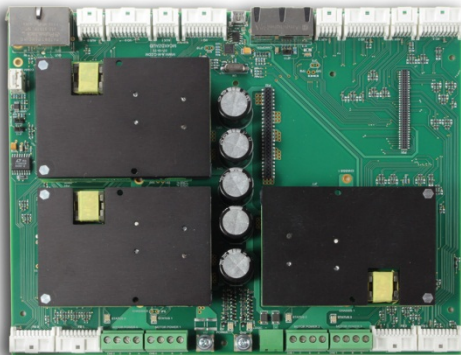

Three-Axis

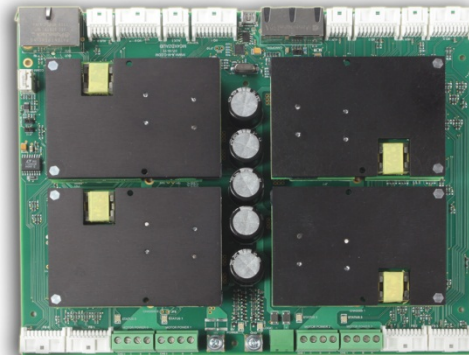

Four-Axis

Status LED Functions

The MC4XDZP01 contains status LEDs that indicate DC Power Supply status, Logic Power Supply status, and the drive Bridge status. The Power LED will light up green when power is applied to P5-Power Connector, and the Logic LED will light up green when the Logic Power is applied to P6-Auxiliary Logic Connector. The Bridge Status LED indicates the servo drive's power bridge state, and will be green when the drive is enabled, and red when the drive is in a fault state.

PIN FUNCTIONS

Mounting Signal Connectors

These connectors mate directly to the drive. Use caution when inserting/removing drive to avoid damaging drive pins! For pin functions refer to the drive datasheet.

Mounting Power Connectors

These connectors mate directly to the drive. Use caution when inserting/removing drive to avoid damaging drive pins! For pin functions refer to the drive datasheet.

MOTOR POWER 0/1/2/3 - Motor Power Connectors

Pin	Name	Description / Notes	I/O
1	MOTOR A	Motor Phase Outputs (16 A continuous maximum per axis)	O
2	MOTOR B		O
3	MOTOR C		O
4	CHS0 or CHS1	Shield Connection. CHS0 connected to Chassis 0 mounting hole, CHS1 connected to Chassis 1 mounting hole.	-

HV - Power Connector

Pin	Name	Description / Notes	I/O
1	HIGH VOLTAGE	DC Power Input (67 A continuous maximum)	I
2	GND	Ground	GND

LOGIC - Auxiliary Logic Connector

Pin	Name	Description / Notes	I/O
1	AUX LOGIC	Logic Supply Input	I
2	GND	Ground	GND

ETHERCAT IN/OUT - EtherCAT Communication Connectors

Pin	Name	Description / Notes	I/O
1	TX+	Transmit Line (100 Base TX)	I/O
2	TX-		I/O
3	RX+	Receive Line (100 Base TX)	I/O
4	RESERVED	Reserved	-
5	RESERVED	Reserved	-
6	RX-	Receive Line (100 Base TX)	I/O
7	RESERVED	Reserved	-
8	COMM CHASSIS	Cable shield. Internally connected to Comm Chassis mounting hole.	-

CANOPEN - CANopen Communication Connectors

Pin	Name	Description / Notes	I/O
1	CAN_H	CAN_H bus line (dominant high)	I
2	CAN_L	CAN_L bus line (dominant low)	I
3	CAN_GND	CAN Ground	GND
4	RESERVED	Reserved	-
5	RESERVED	Reserved	-
6	RESERVED	Reserved	-
7	CAN_GND	CAN Ground	GND
8	RESERVED	Reserved	-

USB - USB Communication Connector

Pin	Name	Description / Notes	I/O
1	VBUS	Supply Voltage	O
2	DATA -	USB Data -	I/O
3	DATA +	USB Data +	I/O
4	RESERVED	Reserved	-
5	USB GND	USB Ground	UGND

I/O 0/1/2/3 - I/O Connectors			
Pin	Name	Description	I/O
1	COMM CHASSIS	Shield Connection. Connected to Comm Chassis mounting hole.	-
2	RESERVED	Reserved	-
3	PDI-1	Programmable Digital Input 1	I
4	PDI-4+	High Speed Differential Programmable Digital Input 4	I
5	PDI-2	Programmable Digital Input 2	I
6	PDI-4-	High Speed Differential Programmable Digital Input 4	I
7	PDI-3	Programmable Digital Input 3	I
8	PDI-5+	High Speed Differential Programmable Digital Input 5	I
9	RESERVED	Reserved	-
10	PDI-5-	High Speed Differential Programmable Digital Input 5	I
11	PDO-1	Programmable Digital Output 1	O
12	RESERVED	Reserved	-
13	PDO-2	Programmable Digital Output 2	O
14	+5V OUT	+5V Output from Logic Supply	O
15	PDO-3	Programmable Digital Output 3	O
16	GND	Ground	GND
17	PDO-4	Programmable Digital Output 4	O
18	PAI-1+	Differential Programmable Analog Input or Reference Signal Input (12-bit resolution)	I
19	PDO-5	Programmable Digital Output 5	O
20	PAI-1-	Differential Programmable Analog Input or Reference Signal Input (12-bit resolution)	I

AUX 0/1/2/3 - Auxiliary Feedback Connectors			
Pin	Name	Description	I/O
1	COMM CHASSIS	Shield Connection. Connected to Comm Chassis mounting hole.	-
2	RESERVED	Reserved	-
3	AUX ENC I+	Auxiliary Incremental Encoder Channel I or Differential Programmable Digital Input 8	I
4	AUX ENC A+	Auxiliary Incremental Encoder Channel A or Differential Programmable Digital Input 6	I
5	AUX ENC I-	Auxiliary Incremental Encoder Channel I or Differential Programmable Digital Input 8	I
6	AUX ENC A-	Auxiliary Incremental Encoder Channel A or Differential Programmable Digital Input 6	I
7	+5V USER	+5V User Supply Output (current shared with Pin-17 on Feedback Connector)	O
8	AUX ENC B+	Auxiliary Incremental Encoder Channel B or Differential Programmable Digital Input 7	I
9	GND	Ground	GND
10	AUX ENC B-	Auxiliary Incremental Encoder Channel B or Differential Programmable Digital Input 7	I

FB 0/1/2/3 - Feedback Connectors*					
Pin	Incremental Encoder	Absolute Encoder	1Vp-p Sin/Cos Encoder	Description / Notes	I/O
1	CHS0 or CHS1	CHS0 or CHS1	CHS0 or CHS1	Shield Connection. FB 0 and FB 1 connected to Chassis 0 mounting hole, FB 2 and FB 3 connected to Chassis 1 mounting hole.	-
2	RESERVED	RESERVED	RESERVED	Reserved	-
3	MOT ENC I+	RESERVED	RESERVED	Differential Encoder Index	I
4	MOT ENC A+	SIN+	SIN+	Differential Encoder A / Differential Sine Input	I
5	MOT ENC I-	RESERVED	RESERVED	Differential Encoder Index	I
6	MOT ENC A-	SIN-	SIN-	Differential Encoder A / Differential Sine Input	I
7	HALL A	RESERVED	HALL A	Commutation sensor input.	I
8	MOT ENC B+	COS+	COS+	Differential Encoder B/ Differential Cosine Input	I
9	HALL B	RESERVED	HALL B	Commutation sensor input.	I
10	MOT ENC B-	COS-	COS-	Differential Encoder B/ Differential Cosine Input	I
11	HALL C	RESERVED	HALL C	Commutation sensor input.	I
12	RESERVED	RESERVED	RESERVED	Reserved	-
13	RESERVED	RESERVED	RESERVED	Reserved	-
14	RESERVED	MOT ENC CLK+	RESERVED	Differential Clock Line	I/O
15	MOTOR THERMISTOR	MOTOR THERMISTOR	MOTOR THERMISTOR	Motor Thermal Protection	I
16	RESERVED	MOT ENC CLK-	RESERVED	Differential Clock Line	I/O
17	+5V USER	+5V USER	+5V USER	+5V User Supply Output (current shared w/ Pin-7 on Aux Feedback Conn.)	O
18	RESERVED	MOT ENC DATA+	RESERVED	Differential Data Line	I/O
19	GND	GND	GND	Ground	GND
20	RESERVED	MOT ENC DATA-	RESERVED	Differential Data Line	I/O

*Note: Feedback supported (Incremental Encoder, Absolute Sin/Cos Encoder, or 1Vp-p Sin/Cos Encoder) will be dependent on drive firmware.

BOARD CONFIGURATION

EtherCAT Communication LED Functions (on RJ-45 Communication Connectors)

LINK/ACTIVITY LED		
LED State	Description	
Green – On	Valid Link - No Activity	
Green – Flickering	Valid Link - Network Activity	
Off	Invalid Link	

STATUS LED		
LED State	Description	
Green – On	The device is in the state OPERATIONAL	
Green – Blinking (2.5Hz – 200ms on and 200ms off)	The device is in the state PRE-OPERATIONAL	
Green – Single Flash (200ms flash followed by 1000ms off)	The device is in state SAFE-OPERATIONAL	
Green – Flickering (10Hz – 50ms on and 50ms off)	The device is booting and has not yet entered the INIT state or The device is in state BOOTSTRAP or Firmware download operation in progress	
Off	The device is in state INIT	

ERROR LED		
LED State	Description	Example
Red – On	A PDI Watchdog timeout has occurred.	Application controller is not responding anymore.
Red – Blinking (2.5Hz – 200ms on and 200ms off)	General Configuration Error.	State change commanded by master is impossible due to register or object settings.
Red – Flickering (10Hz – 50ms on and 50ms off)	Booting Error was detected. INIT state reached, but parameter “Change” in the AL status register is set to 0x01:change/error	Checksum Error in Flash Memory.
Red – Single Flash (200ms flash followed by 1000ms off)	The slave device application has changed the EtherCAT state autonomously: Parameter “Change” in the AL status register is set to 0x01:change/error.	Synchronization error; device enters SAFE-OPERATIONAL automatically
Red – Double Flash (Two 200ms flashes separated by 200ms off, followed by 1000ms off)	An application Watchdog timeout has occurred.	Sync Manager Watchdog timeout.

Mounting Card Address Switch

Switch Diagram	Description																
	<p>Hexadecimal switch settings correspond to the drive Station Alias. Note that drives on an EtherCAT network will be given an address automatically based on proximity to the host. Setting the switches manually is optional, and only necessary if a fixed address is required.</p> <table border="1"> <thead> <tr> <th>Switch Setting</th> <th>Node ID</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>000</td> </tr> <tr> <td>1</td> <td>016</td> </tr> <tr> <td>2</td> <td>032</td> </tr> <tr> <td>...</td> <td>...</td> </tr> <tr> <td>D</td> <td>208</td> </tr> <tr> <td>E</td> <td>224</td> </tr> <tr> <td>F</td> <td>240</td> </tr> </tbody> </table>	Switch Setting	Node ID	0	000	1	016	2	032	D	208	E	224	F	240
Switch Setting	Node ID																
0	000																
1	016																
2	032																
...	...																
D	208																
E	224																
F	240																

CONNECTOR INFORMATION

Mounting Signal Connectors


Connector Information	96-pin (Axis 0) / 68-pin (Axis 1/2/3), 1.27 mm spaced, dual-row socket
Mating Connector Example	No Mating Connector Required. Mate directly to drive

Mounting Power Connectors

Connector Information	50-pin, 2.0 mm spaced, dual-row socket
Mating Connector Example	No Mating Connector Required. Mate directly to drive

MOTOR POWER 0/1/2/3 - Motor Power Connectors

Connector Information	4-port screw terminal	
Mating Connector	Details	Not Applicable
	Included with Card	Not Applicable




HV - Power Connector

Connector Information	Bushings with M4 Screw	
Mating Connector	Details	Not Applicable
	Included with Card	Not Applicable

LOGIC - Auxiliary Logic Connector

Connector Information	2-port, 5.08 mm spaced, enclosed, friction lock header	
Mating Connector	Details	Phoenix Contact: P/N 1757019
	Included with Card	Yes



ETHERCAT IN/OUT - EtherCAT Communication Connectors

Connector Information		Shielded, dual RJ-45 socket with LEDs
Mating Connector	Details	CAT 5 Cable
	Included with Card	No

CANOPEN - CANopen Communication Connectors

Connector Information		Shielded, dual RJ-45 socket with LEDs
Mating Connector	Details	CAT 5 Cable
	Included with Card	No

USB - USB Connector

Connector Information		5-pin, Mini USB B Type port
Mating Connector	Details	TYCO: 1496476-3 (2-meter STD-A to MINI-B ASSY)
	Included with Card	No

I/O 0/1/2/3 - I/O Connectors

Connector Information		20-pin, dual-row, 2.00 mm spaced plug terminal, horizontal mount
Mating Connector	Details	Molex: P/N 51353-2000 (housing); 56134-9100 (contacts)
	Included with Card	No

AUX 0/1/2/3 - Auxiliary Feedback Connectors

Connector Information		10-pin, dual-row, 2.00 mm spaced plug terminal, horizontal mount
Mating Connector	Details	Molex: P/N 51353-1000 (housing); 56134-9100 (contacts)
	Included with Card	No

FB 0/1/2/3 - Feedback Connectors


Connector Information		20-pin, dual-row, 2.00 mm spaced plug terminal, horizontal mount
Mating Connector	Details	Molex: P/N 51353-2000 (housing); 56134-9100 (contacts)
	Included with Card	No

Incremental Encoder


Absolute Encoder

1Vp-p Sin/Cos Encoder

MOUNTING DIMENSIONS

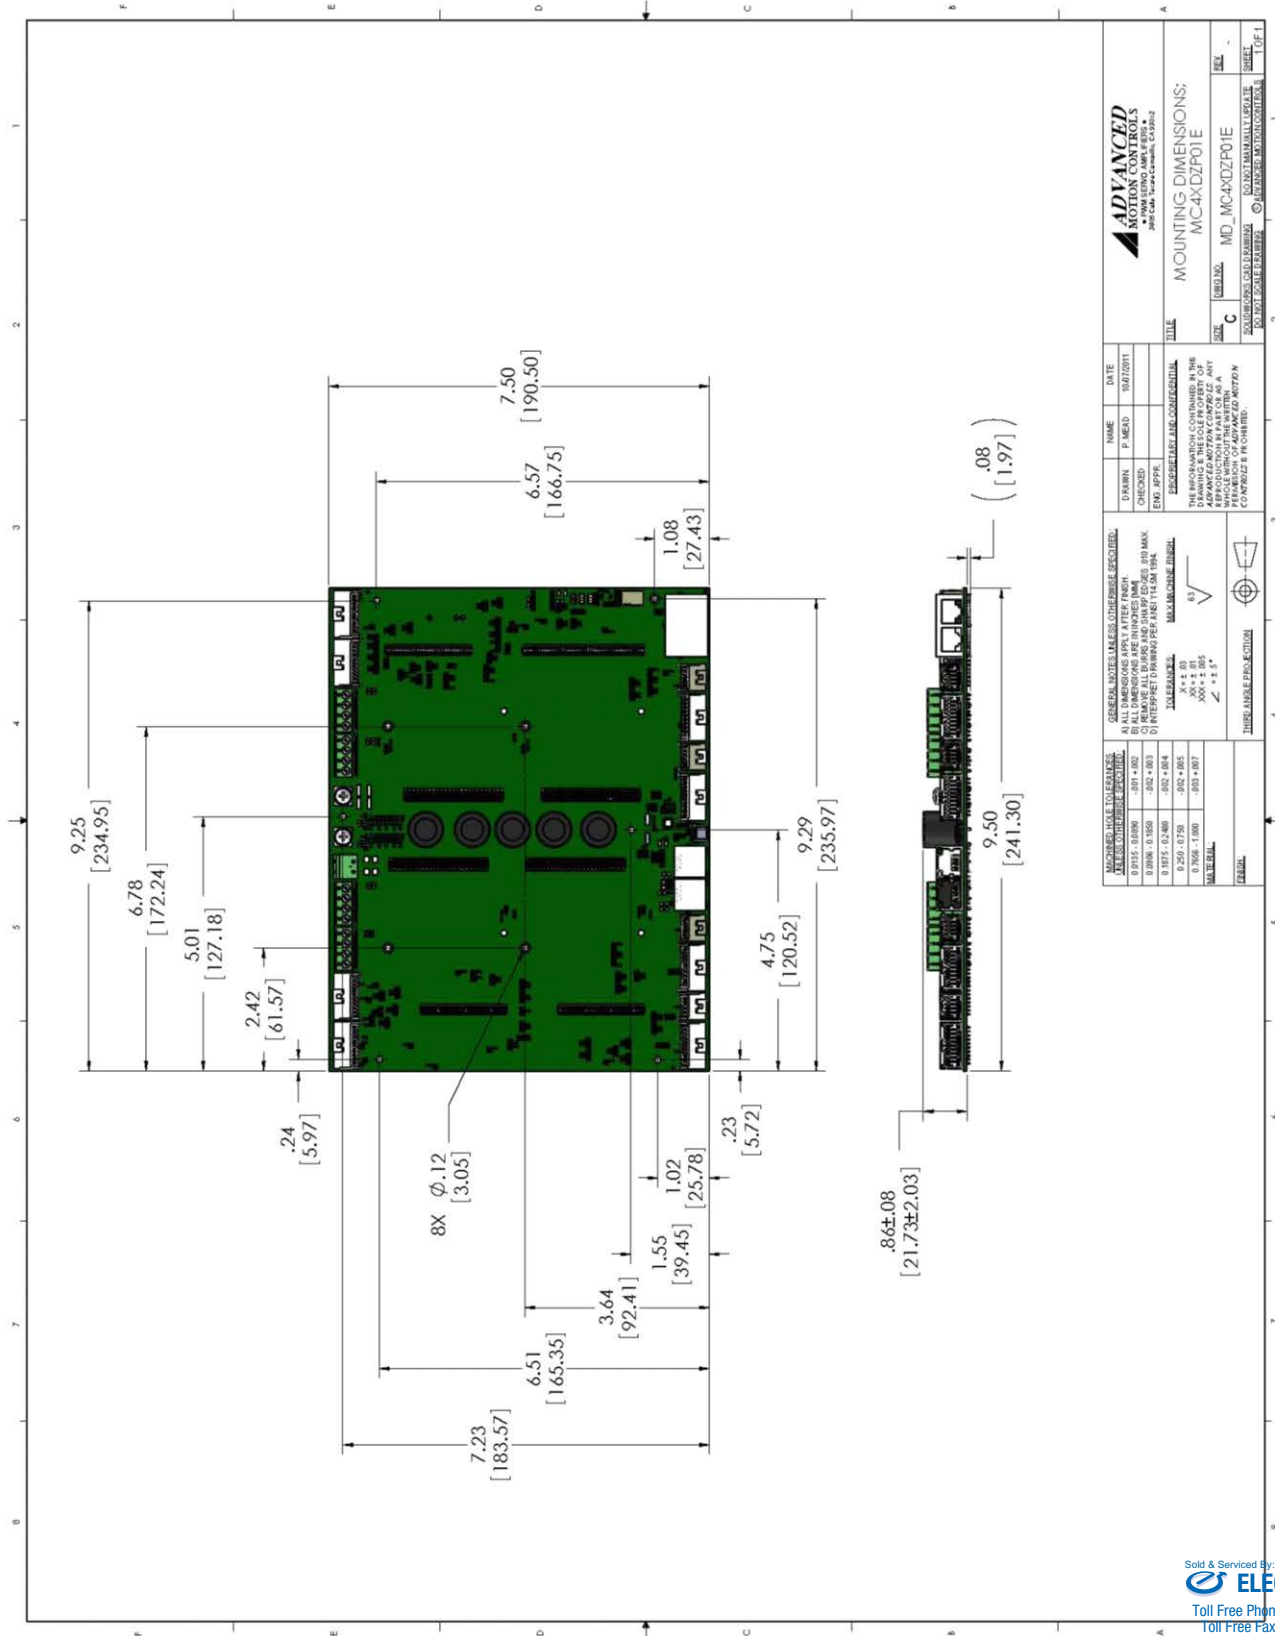

PART NUMBERING INFORMATION

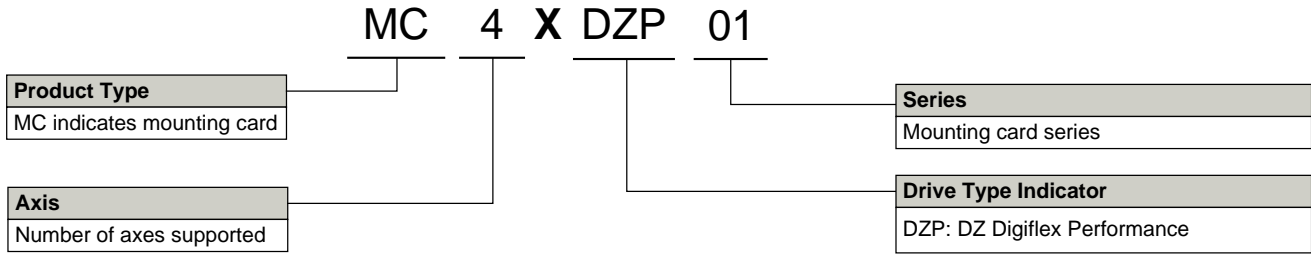

DigiFlex® Performance™ series of products are available in many configurations. All models listed in the selection tables of the website are readily available, standard product offerings.

ADVANCED Motion Controls also has the capability to promptly develop and deliver specified products for OEMs with volume requests. Our Applications and Engineering Departments will work closely with your design team through all stages of development in order to provide the best servo drive solution for your system. Equipped with on-site manufacturing for quick-turn customs capabilities, ADVANCED Motion Controls utilizes our years of engineering and manufacturing expertise to decrease your costs and time-to-market while increasing system quality and reliability.

Examples of Customized Products

- | | |
|--|--|
| <ul style="list-style-type: none"> ▲ Optimized Footprint ▲ Private Label Software ▲ OEM Specified Connectors ▲ No Outer Case ▲ Increased Current Resolution ▲ Increased Temperature Range ▲ Custom Control Interface ▲ Integrated System I/O | <ul style="list-style-type: none"> ▲ Tailored Project File ▲ Silkscreen Branding ▲ Optimized Base Plate ▲ Increased Current Limits ▲ Increased Voltage Range ▲ Conformal Coating ▲ Multi-Axis Configurations ▲ Reduced Profile Size and Weight |
|--|--|

Feel free to contact Applications Engineering for further information and details.