

Description

The DigiFlex® Performance™ (DP) Series digital servo drives are designed to drive brushed and brushless servomotors. These fully digital drives operate in torque, velocity, or position mode and employ Space Vector Modulation (SVM), which results in higher bus voltage utilization and reduced heat dissipation compared to traditional PWM. The drive can be configured for a variety of external command signals. Commands can also be configured using the drive's built-in Motion Engine, an internal motion controller used with distributed motion applications. In addition to motor control, these drives feature dedicated and programmable digital and analog inputs and outputs to enhance interfacing with external controllers and devices.

This DP Series drive features a single RS-232/RS-485 interface used for drive configuration and setup. Drive commissioning is accomplished using DriveWare® 7, available for download at www.a-m-c.com.

All drive and motor parameters are stored in non-volatile memory.

Power Range	
Peak Current	30 A (21.2 A _{RMS})
Continuous Current	15 A (10.6 A _{RMS})
Supply Voltage	200 - 480 VAC



Features

- ▲ Four Quadrant Regenerative Operation
- Space Vector Modulation (SVM) Technology
- ✓ Fully Digital State-of-the-art Design
- Programmable Gain Settings
- Fully Configurable Current, Voltage, Velocity and Position Limits
- PIDF Velocity Loop

- PID + FF Position Loop
- Compact Size, High Power Density
- ▲ 16-bit Analog to Digital Hardware
- Built-in brake/shunt regulator
- ✓ Internal brake/shunt resistor
- On-the-Fly Mode Switching
- On-the-Fly Gain Set Switching

MODES OF OPERATION

- Current
- Position
- Velocity

COMMAND SOURCE

- PWM and Direction
- Encoder Following
- Over the Network
- ±10 V Analog
- Sequencing
- Indexing
- Jogging

FEEDBACK SUPPORTED

- Resolver
- ±10 VDC Position
- Auxiliary Incremental Encoder
- Tachometer (±10 VDC)

INPUTS/OUTPUTS

- 3 High Speed Captures
- 4 Programmable Analog Inputs (16-bit/12-bit Resolution)
- 1 Programmable Analog Output (10-bit Resolution)
- 3 Programmable Digital Inputs (Differential)
- 7 Programmable Digital Inputs (Single-Ended)
- 4 Programmable Digital Outputs (Single-Ended)


COMPLIANCES & AGENCY APPROVALS

- CE Class A (LVD)
- CE Class A (EMC)
- RoHS





BLOCK DIAGRAM

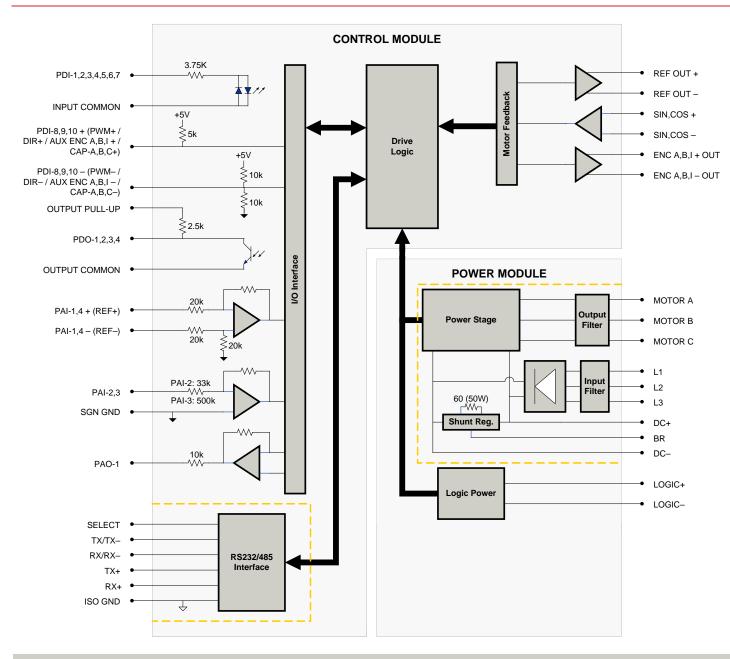

Information on Approvals and Compliances



Compliant with European CE for both the Class A EMC Directive 2004/108/EC on Electromagnetic Compatibility (specifically EN 61000-6-4:2007 and EN 61000-6-2:2005) and LVD requirements of directive 2006/95/EC (specifically EN 60204-1:2006), a low voltage directive to protect users from electrical shock.



RoHS (Reduction of Hazardous Substances) is intended to prevent hazardous substances such as lead from being manufactured in electrical and electronic equipment.





SPECIFICATIONS

		Power Specifications	
Description	Units	Value	
Rated Voltage	VAC (VDC)	480 (678)	
AC Supply Voltage Range	VAC	200 - 480	
AC Supply Minimum	VAC	180	
AC Supply Maximum	VAC	528	
AC Input Phases	-	3	
AC Supply Frequency	Hz	50 - 60	
DC Supply Voltage Range ¹	VDC	255 - 747	
DC Bus Over Voltage Limit	VDC	850	
DC Bus Under Voltage Limit	VDC	230	
Logic Supply Voltage	VDC	20 - 30 (@ 850 mA)	
Maximum Peak Output Current ²	A (Arms)	30 (21.2)	
Maximum Continuous Output Current	A (Arms)	15 (10.6)	
Max. Continuous Output Power @ Rated Voltage ³	W	6840	
Max. Continuous Power Dissipation @ Rated Voltage	W	360	
Internal Bus Capacitance	μF	330	
External Shunt Resistor Minimum Resistance	-	Contact factory before using an external shunt resistor.	
Minimum Load Inductance (Line-To-Line)4	μH	3000	
Switching Frequency	kHz	10	
Maximum Output PWM Duty Cycle	%	100	
Low Voltage Supply Outputs	-	+5 VDC (250 mA)	
	· ·	Control Specifications	
Description	Units	Value	
Communication Interfaces	-	RS-485/232	
Command Sources	-	±10 V Analog, Encoder Following, Over the Network, PWM and Direction, Sequencing, Indexing, Jogging	
Feedback Supported	-	±10 VDC Position, Auxiliary Incremental Encoder, Resolver, Tachometer (±10 VDC)	
Commutation Methods	-	Sinusoidal	
Modes of Operation	-	Current, Position, Velocity	
Motors Supported	-	Closed Loop Vector, Single Phase (Brushed, Voice Coil, Inductive Load), Three Phase (Brushless)	
Hardware Protection	-	40+ Configurable Functions, Over Current, Over Temperature (Drive & Motor), Over Voltage, Short Circuit (Phase-Phase & Phase-Ground), Under Voltage	
Programmable Digital Inputs/Outputs (PDIs/PDOs)	-	10/4	
Programmable Analog Inputs/Outputs (PAIs/PAOs)	-	4/1	
Primary I/O Logic Level	-	24 VDC	
Current Loop Sample Time	μs	100	
Velocity Loop Sample Time	μs	200	
Position Loop Sample Time	μs	200	
Resolver Reference/Excitation Signal	Vrms	4 Vrms @ 5 kHz	
Expected Resolver Transformation Ratio	Vrms	0.5	
Feedback Resolution / Emulated Encoder Resolution ⁵	bit	High Res: 14 (16384 counts/resolver cycle), Low Res: 12 (4096 counts/resolver cycle)	
Maximum Motor Speed Per Feedback Resolution	RPM	High Res: 5000, Low Res: 20000	
Internal Shunt Regulator	- IXFIWI	Yes	
Internal Shunt Resistor	-	Yes	
internal Shufft Resistor		**	
Description	Units	echanical Specifications Value	
Agency Approvals	UIIIIS -	CE Class A (EMC), CE Class A (LVD), RoHS	
Size (H x W x D)	mm (in)	300.5 x 232.1 x 91.8 (11.8 x 9.1 x 3.6)	
· · ·	°C (°F)	· · ·	
Heatsink (Base) Temperature Range ⁶		0 - 75 (32 - 167)	
Storage Temperature Range	°C (°F)	-40 - 85 (-40 - 185)	
Form Factor	-	Panel Mount	
Cooling System	-		
P Rating - IP10			
+24V LOGIC Connector			
AUX ENCODER Connector	-	15-pin, high-density, male D-sub	
COMM Connector	-	9-pin, female D-sub	
C BUS Connector - 4-port, 7.62 mm spaced, enclosed, friction lock header			
FEEDBACK Connector	DBACK Connector - 15-pin, high-density, female D-sub		
I/O Connector	-	26-pin, high-density, female D-sub	
MOTOR POWER Connector	-	4-port, 7.62 mm spaced, enclosed, friction lock header	
POWER Connector	-	3-port, 7.62 mm spaced, enclosed, friction lock header	

Notes

- Capable of supplying drive rated peak current for 2 seconds with 10 second foldback to continuous value. Longer times are possible with low retermined to the continuous value of supplying drive rated peak current for 2 seconds with 10 second foldback to continuous value. Longer times are possible with low retermined to the continuous value. Conget times are possible with low retermined to the continuous value. Longer times are possible with low retermined to the continuous value. Longer times are possible with low retermined to the continuous value. Longer times are possible with low retermined to the continuous value. Longer times are possible with low retermined to the continuous value. Longer times are possible with low retermined to the continuous value. Longer times are possible with low retermined to the continuous value. Longer times are possible with low retermined to the continuous value. Longer times are possible with low retermined to the continuous value. Longer times are possible with low retermined to the continuous value. Longer times are possible with low retermined to the continuous value. Longer times are possible with low retermined to the continuous value. Longer times are possible with low retermined to the continuous value. Longer times are possible with low retermined to the continuous value. Longer times are possible with low retermined to the continuous value. Longer times are possible with low retermined to the continuous value. Longer times are possible with low retermined to the continuous value. Longer times are possible with low retermined to the continuous value. Longer times are possible with low retermined to the continuous value. Longer times are possible with low retermined to the continuous value. Longer times are possible with low retermined to the continuous value. Longer times are possible with low retermined to the continuous value. Longer times are possible with low retermined to the continuous value. Longer times are possible with low retermined to the continuous value.
- 3.
- 5.
- Additional cooling and/or heatsink may be required to achieve rated performance.





PIN FUNCTIONS

+24V LOGIC - Logic Power Connector			
Pin	Name	Description / Notes	1/0
1	LOGIC PWR	Logic Supply Input	I
2	LOGIC GND	Logic Supply Ground	GND

AUX ENCODER - Auxiliary Feedback Connector			
Pin	Name	Description / Notes	1/0
1	RESERVED	Reserved	-
2	RESERVED	Reserved	-
3	RESERVED	Reserved	-
4	PDI-8 + (PWM+ / AUX ENC A+ / CAP-B+)	Programmable Digital Input or PWM or Auxiliary Encoder or High Speed Capture (For	I
5	PDI-8 - (PWM- / AUX ENC A- / CAP-B-)	Single-Ended Signals Leave Negative Terminal Open)	I
6	PDI-9 + (DIR+ / AUX ENC B+ / CAP-C+)	Programmable Digital Input or Direction Input or Auxiliary Encoder or High Speed Capture	I
7	PDI-9 - (DIR- / AUX ENC B- / CAP-C-)	(For Single-Ended Signals Leave Negative Terminal Open)	
8	PDI-10 + (AUX ENC I+ / CAP-A+)	Programmable Digital Input or Auxiliary Encoder or High Speed Capture (For Single-Ended	I
9	PDI-10 - (AUX ENC I- / CAP-A-)	Signals Leave Negative Terminal Open)	I
10	SGN GND	Signal Ground	SGND
11	SGN GND	Signal Ground	SGND
12	SGN GND	Signal Ground	SGND
13	+5V OUT	+5V Encoder Supply Output (Short Circuit Protected)	0
14	PAI-4 +	Differential Programmable Analog Input (12-bit Resolution)	I
15	PAI-4 -	Differential Programmable Arialog input (12-bit Resolution)	

COMM - RS232/RS485 Communication Connector			
Pin	Name	Description / Notes	1/0
1	SELECT	RS232/485 selection. Pull to ground (CN1-5) for RS485.	I
2	RS232 TX / RS485 TX-	Transmit Line (RS-232 or RS-485)	0
3	RS232 RX / RS485 RX-	Receive Line (RS-232 or RS-485)	I
4	RESERVED	Reserved	-
5	ISO GND	Isolated Signal Ground	IGND
6	RS485 TX+	Transmit Line (RS-485)	0
7	RESERVED	Reserved	-
8	RS485 RX+	Receive Line (RS-485)	I
9	RESERVED	Reserved	-

	DC BUS - Power Connector ¹			
Pin	Name	Description / Notes	1/0	
1	DC-	Internal DC Bus Voltage (Can Be Used To Connect External Shunt Regulator)	I/O	
2	BR	External Brake Resistor Connection	-	
3	DC+	Brake Resistor DC+. Connection for brake resistor.	0	
4	DC+	Internal DC Bus Voltage (Can Be Used To Connect External Shunt Regulator)	I/O	

^{1.} Contact factory before using an external shunt regulator or brake resistor.

		FEEDBACK - Feedback Connector	
Pin	Name	Description / Notes	1/0
1	RESERVED	Reserved	-
2	RESERVED	Reserved	-
3	RESERVED	Reserved	-
4	REF OUT +	Decelver Deference / Evoltation Output	0
5	REF OUT -	Resolver Reference/Excitation Output	
6	SIN+	Deschion Cina Instit	I
7	SIN-	Resolver Sine Input	I
8	COS+	Decelver Cosine Innut	I
9	COS-	Resolver Cosine Input	I
10	RESERVED	Reserved	-
11	RESERVED	Reserved	-
12	SGN GND	Signal Ground	SGND
13	+5V OUT	+5V Encoder Supply Output (Short Circuit Protected)	0
14	PAI-3	Programmable Analog Input (12-bit Resolution)	Sold & Serviced By:
15	RESERVED	Reserved	ELECTRON

Toll Free Phone (877) SERV098 Toll Free Fax (877) SERV099 www.electromate.com sales@electromate.com



		I/O - Signal Connector	
Pin	Name	Description / Notes	1/0
1	PDO-1	Isolated Programmable Digital Output	0
2	OUTPUT COMMON	Digital Output Common	OGND
3	PDO-2	Isolated Programmable Digital Output	0
4	PAI-1 + (REF+)	Differential Drogrammable Angles Input or Deference Cignal Input (46 bit Decelution)	I
5	PAI-1 - (REF-)	Differential Programmable Analog Input or Reference Signal Input (16-bit Resolution)	I
6	PAI-2	Programmable Analog Input (12-bit Resolution)	I
7	PAO-1	Programmable Analog Output (10-bit Resolution)	0
8	OUTPUT PULL-UP	Digital Output Pull-Up For User Outputs	I
9	PDI-5	Isolated Programmable Digital Input	I
10	PDO-3	Isolated Programmable Digital Output	0
11	PDI-1	Isolated Programmable Digital Input	I
12	PDI-2	Isolated Programmable Digital Input	I
13	PDI-3	Isolated Programmable Digital Input	I
14	PDO-4	Isolated Programmable Digital Output	0
15	INPUT COMMON	Digital Input Common (Can Be Used To Pull-Up Digital Inputs)	IGND
16	SGN GND	Signal Ground	SGNE
17	PDI-4	Isolated Programmable Digital Input	1
18	PDI-6	Isolated Programmable Digital Input	1
19	PDI-7	Isolated Programmable Digital Input	I
20	ENC A+ OUT	5 1 1 1 5 1 0 1 1 A O 1 1	0
21	ENC A- OUT	Emulated Encoder Channel A Output	0
22	ENC B+ OUT	Family of Family Observed B Outset	0
23	ENC B- OUT	Emulated Encoder Channel B Output	0
24	ENC I+ OUT	Family to define the day Outside	0
25	ENC I- OUT	Emulated Encoder Index Output	
26	SGN GND	Signal Ground	SGNE

	MOTOR POWER - Power Connector			
Pin	Name	Description / Notes	1/0	
1	SHIELD	Motor cable shield. Internally connected to protective earth ground.	-	
2	MOTOR C	Motor Phase C	0	
3	MOTOR B	Motor Phase B	0	
4	MOTOR A	Motor Phase A	0	

POWER - Power Connector			
Pin	Name	Description / Notes	1/0
1	L3		1
2	L2	AC Supply Input (Three Phase)	I
3	L1		I





HARDWARE SETTINGS

Switch Functions

Switch	Description	Setting	
Switch	Switch Description		Off
1	Bit 0 of binary RS-485 drive address. Does not affect RS-232 settings.	1	0
2	Bit 1 of binary RS-485 drive address. Does not affect RS-232 settings.	1	0
3	Bit 2 of binary RS-485 drive address. Does not affect RS-232 settings.	1	0
4	Bit 3 of binary RS-485 drive address. Does not affect RS-232 settings.	1	0
5	Bit 4 of binary RS-485 drive address. Does not affect RS-232 settings.	1	0
6	Bit 5 of binary RS-485 drive address. Does not affect RS-232 settings.	1	0
7	Bit 0 of drive RS-485 baud rate setting. Does not affect RS-232 settings.	1	0
8	Bit 1 of drive RS-485 baud rate setting. Does not affect RS-232 settings.	1	0

Additional Details

The drive can be configured to use the address and/or bit rate stored in non-volatile memory by setting the address and/or bit rate value to 0. Use the table below to map actual bit rates to a bit rate setting.


Baud Rate (kbps)	Value For Bit Rate Setting
Load from non-volatile memory	0
9.6	1
38.4	2
115.2	3





MECHANICAL INFORMATION

+24V LOGIC - Logic Power Connector			
Connector Information		2-port, 5.08 mm spaced, enclosed, friction lock header	
Mating Connector	Details	Phoenix Contact: P/N 1757019	
	Included with Drive	Yes	
		2 LOGIC GND 1 LOGIC PWR	

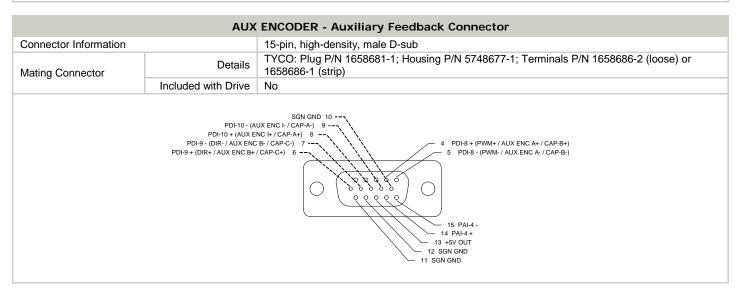


COMM - RS232/RS485 Communication Connector			
Connector Information		9-pin, female D-sub	
Mating Connector	Details	TYCO: Plug P/N 205204-4; Housing P/N 5748677-1; Terminals P/N 1658540-5 (loose) or 1658540-4 (strip)	
	Included with Drive	No	
5 ISO GND 3 RS232 RX / RS485 RX- 2 RS232 TX / RS485 TX- 1 SELECT 6 RS485 TX+ 8 RS485 RX+			





	·		
DC BUS - Power Connector			
Connector Information		4-port, 7.62 mm spaced, enclosed, friction lock header	
Mating Connector	Details	Phoenix Contact: P/N 1804920	
	Included with Drive	Yes	
		DC- 3 DC+	

FEEDBACK - Feedback Connector			
Connector Information		15-pin, high-density, female D-sub	
Mating Connector	Details	TYCO: Plug P/N 748364-1; Housing P/N 5748677-1; Terminals P/N 1658670-2 (loose) or 1658670-1 (strip)	
	Included with Drive	No	
		SIN- 6	

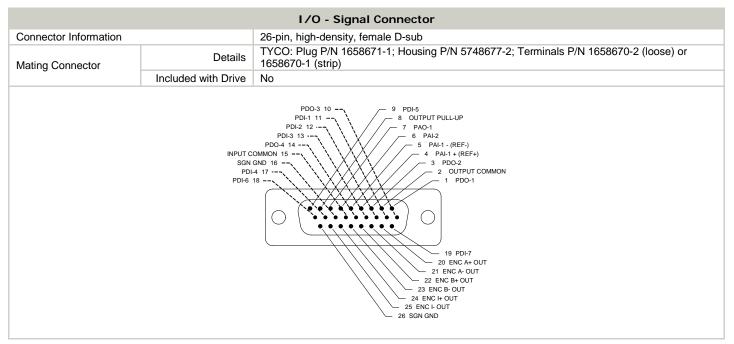






MOTOR POWER - Power Connector			
Connector Information		4-port, 7.62 mm spaced, enclosed, friction lock header	
Mating Connector	Details	Phoenix Contact: P/N 1804920	
	Included with Drive	Yes	
1 SHIELD 2 MOTOR C 4 MOTOR A			

POWER - Power Connector			
Connector Information		3-port, 7.62 mm spaced, enclosed, friction lock header	
Mating Connector	Details	Phoenix Contact: P/N 1804917	
	Included with Drive	Yes	






MOUNTING DIMENSIONS

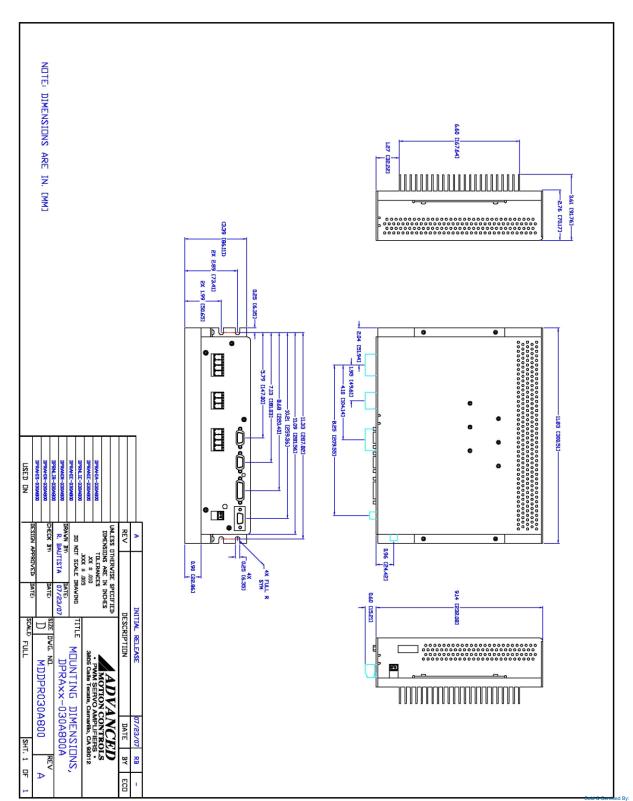



PART NUMBERING INFORMATION

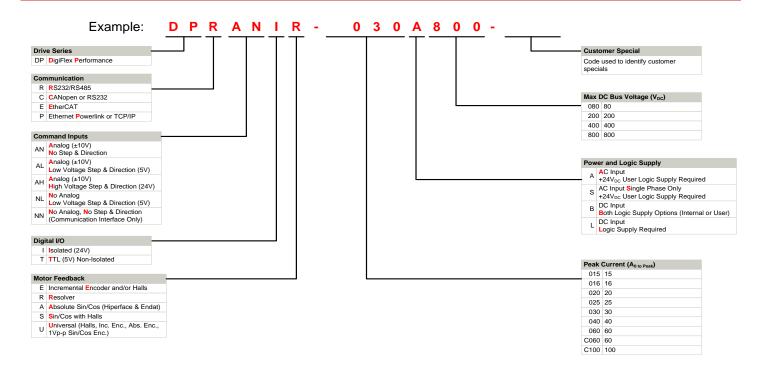

DigiFlex® Performance™ series of products are available in many configurations. Note that not all possible part number combinations are offered as standard drives. All models listed in the selection tables of the website are readily available, standard product offerings.

ADVANCED Motion Controls also has the capability to promptly develop and deliver specified products for OEMs with volume requests. Our Applications and Engineering Departments will work closely with your design team through all stages of development in order to provide the best servo drive solution for your system. Equipped with on-site manufacturing for quickturn customs capabilities, ADVANCED Motion Controls utilizes our years of engineering and manufacturing expertise to decrease your costs and time-to-market while increasing system quality and reliability. Feel free to contact Applications Engineering for further information and details.


Examples of Customized Products

- Optimized Footprint
- Private Label Software
- **OEM Specified Connectors**
- No Outer Case
- **Increased Current Resolution**
- Increased Temperature Range
- **Custom Control Interface**
- Integrated System I/O

- Tailored Project File
- 4 Silkscreen Branding
- Optimized Base Plate
- **Increased Current Limits**
- Increased Voltage Range
- Conformal Coating 4
- Multi-Axis Configurations 4
- Reduced Profile Size and Weight

Available Accessories

ADVANCED Motion Controls offers a variety of accessories designed to facilitate drive integration into a servo system. Visit www.a-m-c.com to see which accessories will assist with your application design and implementation.

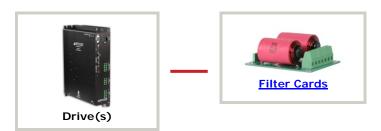



All specifications in this document are subject to change without written notice. Actual product may differ from pictures provided in this document.