

### Description

The DigiFlex® Performance™ (DP) Series digital servo drives are designed to drive brushed and brushless servomotors. These fully digital drives operate in torque, velocity, or position mode and employ Space Vector Modulation (SVM), which results in higher bus voltage utilization and reduced heat dissipation compared to traditional PWM. The drive can be configured for a variety of external command signals. Commands can also be configured using the drive's built-in Motion Engine, an internal motion controller used with distributed motion applications. In addition to motor control, these drives feature dedicated and programmable digital and analog inputs and outputs to enhance interfacing with external controllers and devices.

This DP Series drive features a CANopen interface for networking and a RS-232 interface for drive configuration and setup. Drive commissioning is accomplished using DriveWare® 7, available for download at www.a-m-c.com.

All drive and motor parameters are stored in non-volatile memory.

Power Range	
Peak Current	15 A (10.6 A <sub>RMS</sub> )
Continuous Current	7.5 A (7.5 A <sub>RMS</sub> )
Supply Voltage	100 - 240 VAC



### **Features**

- ▲ Four Quadrant Regenerative Operation
- ▲ Space Vector Modulation (SVM) Technology
- ✓ Fully Digital State-of-the-art Design
- Programmable Gain Settings
- Fully Configurable Current, Voltage, Velocity and Position Limits
- ▲ PIDF Velocity Loop

- ✓ PID + FF Position Loop
- 16-bit Analog to Digital Hardware
- Built-in brake/shunt regulator
- On-the-Fly Mode Switching
- On-the-Fly Gain Set Switching

### MODES OF OPERATION

- Profile Current
- Profile Velocity
- Profile Position
- Cyclic Synchronous Current Mode
- Cyclic Synchronous Velocity Mode
- Cyclic Synchronous Position Mode

### **COMMAND SOURCE**

- ±10 V Analog
- PWM and Direction
- Encoder Following
- Over the Network
- Sequencing
- Indexing
- Jogging

# ELECTROMATE Toll Free Phone (877) SERV098 Toll Free Fax (877) SERV099 www.electromate.com sales@electromate.com

### **FEEDBACK SUPPORTED**

- ±10 VDC Position
- Halls
- Auxiliary Incremental Encoder
- 1Vp-p Sine/Cosine Encoder
- Tachometer (±10 VDC)

### INPUTS/OUTPUTS


- 3 High Speed Captures
- 4 Programmable Analog Inputs (16-bit/12-bit Resolution)
- 1 Programmable Analog Output (10-bit Resolution)
- 3 Programmable Digital Inputs (Differential)
- 7 Programmable Digital Inputs (Single-Ended)
- 4 Programmable Digital Outputs (Single-Ended)

### **COMPLIANCES & AGENCY APPROVALS**

- UL
- cUL
- CE Class A (LVD)
- CE Class A (EMC)
- RoHS



### **BLOCK DIAGRAM**

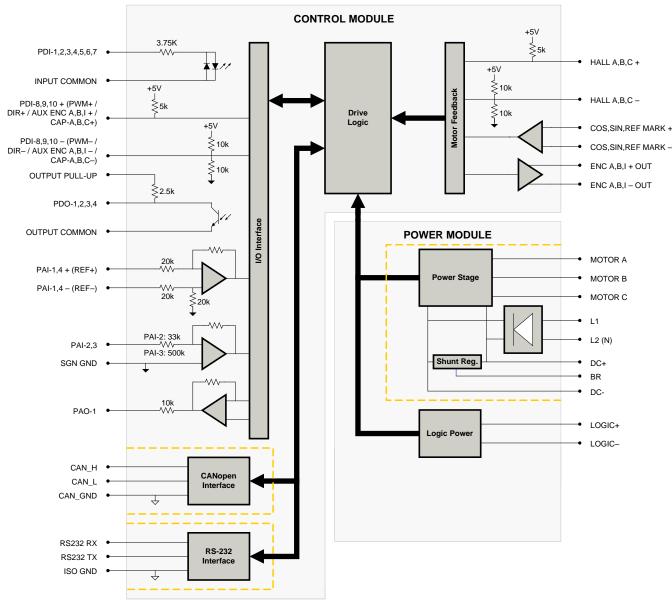

# US and Canadian safety compliance with UL 508c, the industrial standard for power conversion electronics. UL registered under file number E140173. Note that machine components compliant with UL are considered UL registered as opposed to UL listed as would be the case for commercial products. Compliant with European CE for both the Class A EMC Directive 2004/108/EC on Electromagnetic Compatibility (specifically EN 61000-6-4:2007 and EN 61000-6-2:2005) and LVD requirements of directive 2006/95/EC (specifically EN 60204-1:2006), a low voltage directive to protect users from electrical shock. RoHS (Reduction of Hazardous Substances) is intended to prevent hazardous substances such as lead from being manufactured in electrical and electronic equipment.



### **SPECIFICATIONS**

Description	Units	Power Specifications  Value
Rated Voltage	VAC (VDC)	240 (339)
AC Supply Voltage Range	VAC	100 - 240
AC Supply Minimum	VAC	90
AC Supply Maximum	VAC	264
AC Input Phases	-	1
AC Supply Frequency	Hz	50 - 60
DC Supply Voltage Range <sup>1</sup>	VDC	127 - 373
DC Bus Over Voltage Limit	VDC	394
DC Bus Under Voltage Limit	VDC	55
Logic Supply Voltage	VDC	20 - 30 (@ 850 mA)
Maximum Peak Output Current <sup>-2</sup>	A (Arms)	15 (10.6)
Maximum Continuous Output Current <sup>3</sup>	A (Arms)	7.5 (7.5)
Max. Continuous Output Power @ Rated Voltage <sup>4</sup>	W	2415
Max. Continuous Power Dissipation @ Rated Voltage	W	127
Internal Bus Capacitance	μF	540
External Shunt Resistance Minimum Resistance <sup>5</sup>	Ω	25
Minimum Load Inductance (Line-To-Line) <sup>6</sup>	μH	600
Switching Frequency	kHz	20
Maximum Output PWM Duty Cycle	%	100
Low Voltage Supply Outputs	70	+5 VDC (250 mA)
Low Voltage Supply Sulpuis		Control Specifications
Description	Units	Value
Communication Interfaces	-	CANopen (RS-232 for configuration)
Command Sources	-	±10 V Analog, Encoder Following, Over the Network, PWM and Direction, Sequencing, Indexing, Jogging
Feedback Supported	-	±10 VDC Position, 1Vp-p Sine/Cosine Encoder, Auxiliary Incremental Encoder, Halls, Tachometer (±10 VDC)
Commutation Methods	-	Sinusoidal
Modes of Operation	-	Profile Current, Profile Velocity, Profile Position, Cyclic Synchronous Current Mode, Cyclic Synchronous Velocity Mode, Cyclic Synchronous Position Mode
Motors Supported	-	Closed Loop Vector, Single Phase (Brushed, Voice Coil, Inductive Load), Three Phase (Brushless)
Hardware Protection	-	40+ Configurable Functions, Over Current, Over Temperature (Drive & Motor), Over Voltage, Short Circuit (Phase-Phase & Phase-Ground), Under Voltage
Programmable Digital Inputs/Outputs (PDIs/PDOs)	-	10/4
Programmable Analog Inputs/Outputs (PAIs/PAOs)	-	4/1
Primary I/O Logic Level	-	24 VDC
Current Loop Sample Time	μs	50
Velocity Loop Sample Time	μs	100
Position Loop Sample Time	μs	100
Sin/Cos Encoder DC Offset Range	V	2 - 3.4
Maximum Sin/Cos Encoder Frequency	kHz	200
Maximum Sin/Cos Interpolation	-	2048 counts per sin/cos cycle
Internal Shunt Regulator	-	Yes
Internal Shunt Resistor	-	No
Description	M Units	lechanical Specifications Value
Agency Approvals	- Units	CE Class A (EMC), CE Class A (LVD), cUL, RoHS, UL
Size (H x W x D)	mm (in)	177.495 x 123.393 x 44.450 (6.988 x 4.858 x 1.750)
Weight	g (oz)	894 (31.5)
Heatsink (Base) Temperature Range <sup>7</sup>	°C (°F)	0 - 75 (32 - 167)
. , ,	°C (°F)	-40 - 85 (-40 - 185)
Storage Temperature Range Form Factor	-C (*F)	· · · · ·
	-	Panel Mount  Natural Convection
Cooling System	-	IP10
IP Rating		
+24V LOGIC Connector	-	2-port, 5.08 mm spaced, enclosed, friction lock header
AUX COMM Connector	-	3-pin, 2.5 mm spaced, enclosed, friction lock header
AUX ENCODER Connector	-	15-pin, high-density, male D-sub
COMM Connector	-	Shielded, dual RJ-45 socket with LEDs
FEEDBACK Connector	-	15-pin, high-density, female D-sub
I/O Connector	-	26-pin, high-density, female D-sub
POWER Connector	-	10-port, 5.08 mm spaced, enclosed, friction lock header

- Large inrush current may occur upon initial DC supply connection to DC Bus.
- ELECTROMAPPeable of supplying drive rated peak current for 2 seconds with 10 second foldback to continuous value. Longer times are possible with lower current limits.

  Toll Free Phone (877) SERV999 (DC Rated Voltage) \* (Cont. RMS Current) \* 0.95.

  Toll Free Fax (877) SERV999 (DC Rated Voltage) \* (Cont. RMS Current) \* 0.95.

  Toll Free Fax (877) SERV999 (DC Rated Voltage) \* (Cont. RMS Current) \* 0.95.

  Www.electromate.com ADVANCED Motion Controls recommends using an external fuse in series with the shunt resistor. A 3 amp motor delay fuse is typical. 
  sales@electromate.com/over: inductance is acceptable for bus voltages well below maximum. Use external inductance to meet requirements.

Additional cooling and/or heatsink may be required to achieve rated performance.



## **PIN FUNCTIONS**

+24V LOGIC - Logic Power Connector				
Pin	Pin Name Description / Notes I/O			
1	LOGIC GND	Logic Supply Ground	GND	
2	LOGIC PWR	Logic Supply Input	I	

AUX COMM - RS232 Communication Connector					
Pin	Pin Name Description / Notes I/0				
1	RS232 RX	Receive Line (RS-232)	I		
2	RS232 TX	Transmit Line (RS-232)	0		
3	ISO GND	Isolated Signal Ground	IGND		

AUX ENCODER - Auxiliary Feedback Connector			
Pin	Name	Description / Notes	1/0
1	RESERVED	Reserved	-
2	RESERVED	Reserved	-
3	RESERVED	Reserved	-
4	PDI-8 + (PWM+ / AUX ENC A+ / CAP-B+)	Programmable Digital Input or PWM or Auxiliary Encoder or High Speed Capture (For	I
5	PDI-8 - (PWM- / AUX ENC A- / CAP-B-)	Single-Ended Signals Leave Negative Terminal Open)	I
6	PDI-9 + (DIR+ / AUX ENC B+ / CAP-C+)	Programmable Digital Input or Direction Input or Auxiliary Encoder or High Speed Capture	I
7	PDI-9 - (DIR- / AUX ENC B- / CAP-C-)	(For Single-Ended Signals Leave Negative Terminal Open)	
8	PDI-10 + (AUX ENC I+ / CAP-A+)	Programmable Digital Input or Auxiliary Encoder or High Speed Capture (For Single-Ended	I
9	PDI-10 - (AUX ENC I- / CAP-A-)	Signals Leave Negative Terminal Open)	I
10	SGN GND	Signal Ground	SGND
11	SGN GND	Signal Ground	SGND
12	SGN GND	Signal Ground	SGND
13	+5V OUT	+5V Encoder Supply Output (Short Circuit Protected)	0
14	PAI-4 +	Differential Programmable Angles Input (42 bit Decelution)	1
15	PAI-4 -	Differential Programmable Analog Input (12-bit Resolution)	

	COMM - CAN Communication Connector			
Pin	Name	Description / Notes	1/0	
1	CAN_H	CAN_H Line (Dominant High)	I	
2	CAN_L	CAN _L Line (Dominant Low)	I	
3	CAN_GND	CAN Ground	CGND	
4	RESERVED	Reserved	-	
5	RESERVED	Reserved	-	
6	RESERVED	Reserved	-	
7	CAN_GND	CAN Ground	CGND	
8	RESERVED	Reserved	-	

		FEEDBACK - Feedback Connector	
Pin	Name	Description / Notes	1/0
1	COS+	Cooling Input	1
2	COS -	Cosine Input	I
3	SIN +	Sine Input	I
4	SIN -	Sine input	I
5	SGN GND	Signal Ground	SGND
6	HALL A+	Commutation Sensor Input (For Single-Ended Signals Leave Negative Terminal Open)	
7	HALL A-	Commutation Sensor input (For Single-Ended Signals Leave Negative Terminal Open)	I
8	HALL B+	Commutation Conser Input /For Single Ended Signals Legus Negative Terminal Open)	
9	HALL B-	Commutation Sensor Input (For Single-Ended Signals Leave Negative Terminal Open)	I
10	REF MARK +	Reference mark from sine/cosine encoder	I
11	HALL C+	Commutation Conser Input /For Single Ended Signals Legue Negative Terminal Open	I
12	HALL C-	Commutation Sensor Input (For Single-Ended Signals Leave Negative Terminal Open)	
13	+5V OUT	+5V Encoder Supply Output (Short Circuit Protected)	0
14	PAI-3	Programmable Analog Input (12-bit Resolution)	I
15	REF MARK -	Reference mark from sine/cosine encoder	I





		I/O - Signal Connector	
Pin	Name	Description / Notes	1/0
1	PDO-1	Isolated Programmable Digital Output	0
2	OUTPUT COMMON	Digital Output Common	OGNI
3	PDO-2	Isolated Programmable Digital Output	0
4	PAI-1 + (REF+)	D''' (1) D	1
5	PAI-1 - (REF-)	Differential Programmable Analog Input or Reference Signal Input (16-bit Resolution)	1
6	PAI-2	Programmable Analog Input (12-bit Resolution)	I
7	PAO-1	Programmable Analog Output (10-bit Resolution)	0
8	OUTPUT PULL-UP	Digital Output Pull-Up For User Outputs	I
9	PDI-5	Isolated Programmable Digital Input	I
10	PDO-3	Isolated Programmable Digital Output	0
11	PDI-1	Isolated Programmable Digital Input	I
12	PDI-2	Isolated Programmable Digital Input	I
13	PDI-3	Isolated Programmable Digital Input	I
14	PDO-4	Isolated Programmable Digital Output	0
15	INPUT COMMON	Digital Input Common (Can Be Used To Pull-Up Digital Inputs)	IGNI
16	SGN GND	Signal Ground	SGN
17	PDI-4	Isolated Programmable Digital Input	I
18	PDI-6	Isolated Programmable Digital Input	1
19	PDI-7	Isolated Programmable Digital Input	1
20	ENC A+ OUT	Faculated Face des Observal A Outsut	0
21	ENC A- OUT	Emulated Encoder Channel A Output	0
22	ENC B+ OUT	Emulated Encoder Channel B Output	0
23	ENC B- OUT	Emulated Encoder Channel B Output	0
24	ENC I+ OUT	Foundated Foundated Anni Outrant	0
25	ENC I- OUT	Emulated Encoder Index Output	0
26	SGN GND	Signal Ground	SGN

	POWER - Power Connector			
Pin	Name	Description / Notes	1/0	
1	MOTOR A	Motor Phase A	0	
2	MOTOR B	Motor Phase B	0	
3	MOTOR C	Motor Phase C	0	
4	SHIELD	Motor cable shield. Internally connected to protective earth ground.	-	
5	PE	Protective Earth Ground	-	
6	L1	AC Cumply Innut (Cingle Phone)	I	
7	L2 (N)	AC Supply Input (Single Phase)	I	
8	DC+	Internal DC Bus Voltage	I/O	
9	BR	External Brake Resistor Connection. If using an external brake resistor, connect between this port and DC+.	-	
10	DC-	Internal DC Bus Voltage	I/O	





### HARDWARE SETTINGS

### **Switch Functions**

Switch	Description	Setti	ting
	Description	On	Off
1	Bit 0 of binary CANopen node ID. Does not affect RS-232 settings.	1	0
2	Bit 1 of binary CANopen node ID. Does not affect RS-232 settings.	1	0
3	Bit 2 of binary CANopen node ID. Does not affect RS-232 settings.	1	0
4	Bit 3 of binary CANopen node ID. Does not affect RS-232 settings.	1	0
5	Bit 4 of binary CANopen node ID. Does not affect RS-232 settings.	1	0
6	Bit 5 of binary CANopen node ID. Does not affect RS-232 settings.	1	0
7	Bit 0 of drive CANopen bit rate setting. Does not affect RS-232 settings.	1	0
8	Bit 1 of drive CANopen bit rate setting. Does not affect RS-232 settings.	1	0

### Additional Details

The drive can be configured to use the address and/or bit rate stored in non-volatile memory by setting the address and/or bit rate value to 0. Use the table below to map actual bit rates to a bit rate setting.

Bit Rate (kbits/sec)	Value For Bit Rate Setting
Load from non-volatile memory	0
500	1
250	2
125	3

### **Jumper Settings**

Jumper	Jumper Description		Configuration	
	Header Jumper	Not Installed	Pins 1-2	Pins 2-3
J1	CAN bus termination. Install this jumper (2.54mm) on the last drive in a CAN network. This jumper is located on a 4-pin header adjacent to the RS-232 connector. It consists of the two pins furthest from the connector.	Non- terminating Node	Terminating Node	N/A
J2	Reserved.	-	-	N/A





### **MECHANICAL INFORMATION**

+24V LOGIC - Logic Power Connector		
Connector Information		2-port, 5.08 mm spaced, enclosed, friction lock header
Mating Connector	Details	Phoenix Contact: P/N 1757019
	Included with Drive	Yes




AUX COMM - RS232 Communication Connector				
Connector Information		3-pin, 2.5 mm spaced, enclosed, friction lock header		
Mating Connector	Details	Phoenix Contact: Plug P/N 1881338		
	Included with Drive	Yes		
3 ISO GND  2 RS232 TX  1 RS232 RX				

AUX ENCODER - Auxiliary Feedback Connector		
Connector Information		15-pin, high-density, male D-sub
Mating Connector	Details	TYCO: Plug P/N 1658681-1; Housing P/N 5748677-1; Terminals P/N 1658686-2 (loose) or 1658686-1 (strip)
	Included with Drive	No
SGN GND 10  PDI-10 - (AUX ENC I-/CAP-A+) 9  PDI-9 - (DIR-/AUX ENC B-/CAP-C+) 7  PDI-9 + (DIR+/AUX ENC B-/CAP-C+) 6  15 PDI-8 - (PWM-/AUX ENC A-/CAP-B-)  15 PAI-4  14 PDI-8 + (PWM-/AUX ENC A-/CAP-B-)  15 PAI-4  17 PDI-9 - (PWM-/AUX ENC A-/CAP-B-)  18 PAI-4  19 PDI-9 - (PWM-/AUX ENC A-/CAP-B-)		





COMM - CAN Communication Connector			
Connector Information		Shielded, dual RJ-45 socket with LEDs	
Mating Connector	Details	TYCO: Plug P/N 5-569552-3	
	Included with Drive	No	
A CAN_GND 7 CAN_GND 3 CAN_L 2 CAN_L 1 CAN_GND CAN_L 1			

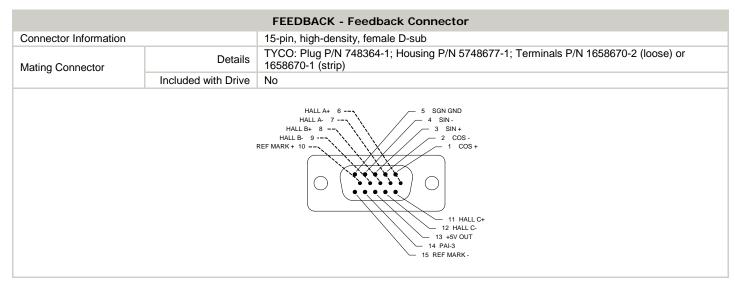


Connector Information		26-pin, high-density, female D-sub
Mating Connector	Details	TYCO: Plug P/N 1658671-1; Housing P/N 5748677-2; Terminals P/N 1658670-2 (loose) or 1658670-1 (strip)
•	Included with Drive	No
d By: <b>LECTROMATE</b> *Phone (877) SERV098 Fax. (877) SERV099	SGN	PDI-2 12



POWER - Power Connector			
Connector Information		10-port, 5.08 mm spaced, enclosed, friction lock header	
Moting Connector	Details	Phoenix Contact: P/N 1781069	
Mating Connector	Included with Drive	Yes	
M M M M M M M M M M M M M M M M M M M			




### MOUNTING DIMENSIONS

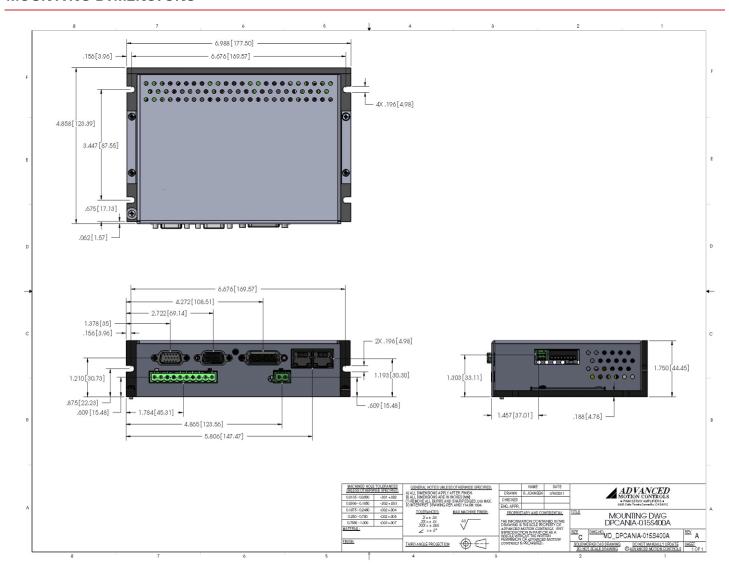



### PART NUMBERING INFORMATION

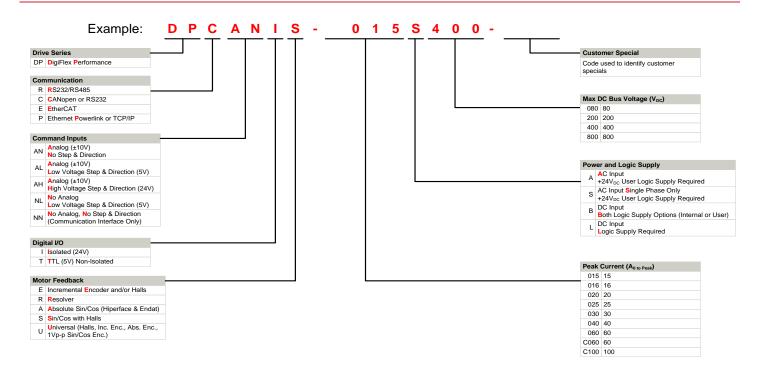

DigiFlex® Performance™ series of products are available in many configurations. Note that not all possible part number combinations are offered as standard drives. All models listed in the selection tables of the website are readily available, standard product offerings.

ADVANCED Motion Controls also has the capability to promptly develop and deliver specified products for OEMs with volume requests. Our Applications and Engineering Departments will work closely with your design team through all stages of development in order to provide the best servo drive solution for your system. Equipped with on-site manufacturing for quick-turn customs capabilities, ADVANCED Motion Controls utilizes our years of engineering and manufacturing expertise to decrease your costs and time-to-market while increasing system quality and reliability. Feel free to contact Applications Engineering for further information and details.

## **Examples of Customized Products**

- Optimized Footprint
- ▲ Private Label Software
- ▲ OEM Specified Connectors
- No Outer Case
- ▲ Increased Current Resolution
- ▲ Increased Temperature Range
- ▲ Custom Control Interface
- ▲ Integrated System I/O

- ▲ Tailored Project File
- Silkscreen Branding
- Optimized Base Plate
- ▲ Increased Current Limits
- ▲ Increased Voltage Range
- Conformal Coating
- Multi-Axis Configurations
- Reduced Profile Size and Weight

### **Available Accessories**

ADVANCED Motion Controls offers a variety of accessories designed to facilitate drive integration into a servo system. Visit <a href="https://www.a-m-c.com">www.a-m-c.com</a> to see which accessories will assist with your application design and implementation.



Sold & Serviced By:

ELECTROMATE

Toll Free Phone (877) SERV098

Toll Free Fax (877) SERV099

weetwomae.com
All specifications in this document are subject to change without written notice. Actual product may differ from pictures provided in this document.