

De	26	c٢	in	ti	on	
יש	= 31	G.	ı	ш	u	ı

The DigiFlex® Performance™ (DP) Series digital servo drives are designed to drive brushed and brushless servomotors. These fully digital drives operate in torque, velocity, or position mode and employ Space Vector Modulation (SVM), which results in higher bus voltage utilization and reduced heat dissipation compared to traditional PWM. The drive can be configured for a variety of external command signals. Commands can also be configured using the drive's built-in Motion Engine, an internal motion controller used with distributed motion applications. In addition to motor control, these drives feature dedicated and programmable digital and analog inputs and outputs to enhance interfacing with external controllers and devices.

This DP Series drive features a CANopen interface for networking and a RS-232 interface for drive configuration and setup. Drive commissioning is accomplished using DriveWare® 7, available for download at www.a-m-c.com.

All drive and motor parameters are stored in non-volatile memory.

Power Rang	ge
Peak Current	15 A (10.6 A <sub>RMS</sub> )
Continuous Current	7.5 A (7.5 A <sub>RMS</sub> )
Supply Voltage	40 - 190 VDC



#### **Features**

- ▲ Four Quadrant Regenerative Operation
- Space Vector Modulation (SVM) Technology
- ✓ Fully Digital State-of-the-art Design
- Programmable Gain Settings
- Fully Configurable Current, Voltage, Velocity and Position Limits

- ▲ PIDF Velocity Loop
- ✓ PID + FF Position Loop
- Compact Size, High Power Density
- 16-bit Analog to Digital Hardware
- On-the-Fly Mode Switching
- On-the-Fly Gain Set Switching

### MODES OF OPERATION

- Profile Current
- Profile Velocity
- Profile Position
- Cyclic Synchronous Current Mode
- Cyclic Synchronous Velocity Mode
- Cyclic Synchronous Position Mode

#### **COMMAND SOURCE**

- ±10 V Analog
- PWM and Direction
- Encoder Following
- Over the Network
- Sequencing
- Indexing
- Jogging

#### **FEEDBACK SUPPORTED**

- ±10 VDC Position
- Resolver
- Auxiliary Incremental Encoder
- Tachometer (±10 VDC)

### INPUTS/OUTPUTS

- 3 High Speed Captures
- 3 Programmable Analog Inputs (16-bit/12-bit Resolution)
- 2 Programmable Analog Outputs (10-bit Resolution)
- 2 Programmable Digital Inputs (Differential)
- 6 Programmable Digital Inputs (Single-Ended)
- 4 Programmable Digital Outputs (Single-Ended)


#### **COMPLIANCES & AGENCY APPROVALS**

- UL
- cUL
- CE Class A (LVD)
- CE Class A (EMC)
- RoHS





# **BLOCK DIAGRAM**

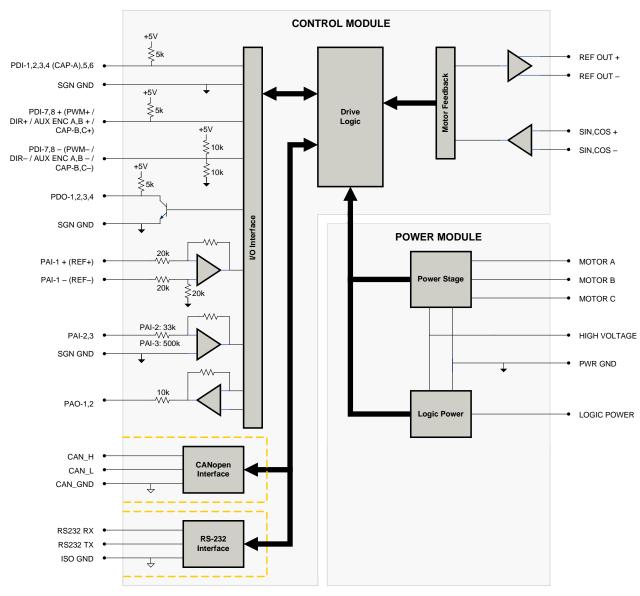

	Information on Approvals and Compliances				
c <b>FL</b> °us	US and Canadian safety compliance with UL 508c, the industrial standard for power conversion electronics. UL registered under file number E140173. Note that machine components compliant with UL are considered UL registered as opposed to UL listed as would be the case for commercial products.				
(€	Compliant with European CE for both the Class A EMC Directive 2004/108/EC on Electromagnetic Compatibility (specifically EN 61000-6-4:2007 and EN 61000-6-2:2005) and LVD requirements of directive 2006/95/EC (specifically EN 60204-1:2006), a low voltage directive to protect users from electrical shock.				
ROHS	RoHS (Reduction of Hazardous Substances) is intended to prevent hazardous substances such as lead from being manufactured in electrical and electronic equipment.				





# **SPECIFICATIONS**

Description         Units         Value           DC Supply Voltage Range         VDC         40 - 190           DC Bus Over Voltage Limit         VDC         198           DC Bus Under Voltage Limit         VDC         35           Logic Supply Voltage         VDC         40 - 190           Maximum Peak Output Current¹         A (Arms)         15 (10.6)           Maximum Continuous Output Current²         A (Arms)         7.5 (7.5)           Maximum Continuous Output Power         W         1354           Meximum Deves Discipation of Continuous Current         W         74		
DC Bus Over Voltage Limit         VDC         198           DC Bus Under Voltage Limit         VDC         35           Logic Supply Voltage         VDC         40 - 190           Maximum Peak Output Current¹         A (Arms)         15 (10.6)           Maximum Continuous Output Current²         A (Arms)         7.5 (7.5)           Maximum Continuous Output Power         W         1354		
DC Bus Under Voltage Limit         VDC         35           Logic Supply Voltage         VDC         40 - 190           Maximum Peak Output Current¹         A (Arms)         15 (10.6)           Maximum Continuous Output Current²         A (Arms)         7.5 (7.5)           Maximum Continuous Output Power         W         1354		
Logic Supply Voltage         VDC         40 - 190           Maximum Peak Output Current¹         A (Arms)         15 (10.6)           Maximum Continuous Output Current²         A (Arms)         7.5 (7.5)           Maximum Continuous Output Power         W         1354		
Maximum Peak Output Current¹         A (Arms)         15 (10.6)           Maximum Continuous Output Current²         A (Arms)         7.5 (7.5)           Maximum Continuous Output Power         W         1354		
Maximum Continuous Output Current <sup>2</sup> A (Arms) 7.5 (7.5)  Maximum Continuous Output Power W 1354		
Maximum Continuous Output Power W 1354		
·		
Manifesture Device Discination of Continuous Current		
Maximum Power Dissipation at Continuous Current W 71		
Internal Bus Capacitance µF 20		
Minimum Load Inductance (Line-To-Line) <sup>3</sup> µH 250		
Switching Frequency kHz 20		
Maximum Output PWM Duty Cycle % 100		
Low Voltage Supply Outputs - +5 VDC (250 mA)		
Control Specifications		
Description Units Value		
Communication Interfaces - CANopen (RS-232 for configuration)		
Command Sources - ±10 V Analog, Encoder Following, Over the Network, PWM and Direction, Sequencing, Indexing, Jo	gging	
Feedback Supported - ±10 VDC Position, Auxiliary Incremental Encoder, Resolver, Tachometer (±10 VDC)		
Commutation Methods - Sinusoidal		
Modes of Operation - Profile Current, Profile Velocity, Profile Position, Cyclic Synchronous Current Mode, Cyclic Synchro Velocity Mode, Cyclic Synchronous Position Mode	ous	
Motors Supported - Closed Loop Vector, Single Phase (Brushed, Voice Coil, Inductive Load), Three Phase (Brushless)		
Hardware Protection - 40+ Configurable Functions, Over Current, Over Temperature (Drive & Motor), Over Voltage, Short (Phase-Phase & Phase-Ground), Under Voltage	40+ Configurable Functions, Over Current, Over Temperature (Drive & Motor), Over Voltage, Short Circuit (Phase-Phase & Phase-Ground), Under Voltage	
Programmable Digital Inputs/Outputs (PDIs/PDOs) - 8/4		
Programmable Analog Inputs/Outputs (PAIs/PAOs) - 3/2		
Primary I/O Logic Level - 5V TTL		
Current Loop Sample Time µs 50		
Velocity Loop Sample Time µs 100		
Position Loop Sample Time µs 100		
Resolver Reference/Excitation Signal Vrms 4 Vrms @ 5 kHz		
Expected Resolver Transformation Ratio Vrms 0.5		
Feedback Resolution / Emulated Encoder Resolution bit High Res: 14 (16384 counts/resolver cycle), Low Res: 12 (4096 counts/resolver cycle)		
Maximum Motor Speed Per Feedback Resolution RPM High Res: 5000, Low Res: 20000		
Mechanical Specifications		
Description Units Value		
Agency Approvals - CE Class A (EMC), CE Class A (LVD), cUL, RoHS, UL		
Size (H x W x D) mm (in) 132.5 x 89.5 x 35.9 (5.2 x 3.5 x 1.4)		
Weight         g (oz)         495 (17.5)		
Heatsink (Base) Temperature Range <sup>5</sup> °C (°F) 0 - 65 (32 - 149)		
Storage Temperature Range         °C (°F)         -40 - 85 (-40 - 185)		
Form Factor - Panel Mount		
Cooling System - Natural Convection		
IP Rating - IP10		
AUX COMM Connector - 3-pin, 2.5 mm spaced, enclosed, friction lock header		
COMM Connector - Shielded, dual RJ-45 socket with LEDs		
FEEDBACK Connector - 15-pin, high-density, female D-sub		
I/O Connector - 26-pin, high-density, female D-sub		
POWER Connector - 6-pin, 3.96 mm spaced, friction lock header		

#### Notes

- Capable of supplying drive rated peak current for 2 seconds with 10 second foldback to continuous value. Longer times are possible with lower current limits. Continuous A<sub>rms</sub> value attainable when RMS Charge-Based Limiting is used.

  Lower inductance is acceptable for bus voltages well below maximum. Use external inductance to meet requirements. Higher and lower resolution options are available. Contact Applications Engineering for more information.

- Additional cooling and/or heatsink may be required to achieve rated performance.





# **PIN FUNCTIONS**

AUX COMM - RS232 Communication Connector				
Pin	Pin Name Description / Notes I/			
1	RS232 RX	Receive Line (RS-232)	I	
2	RS232 TX	Transmit Line (RS-232)	0	
3	ISO GND	Isolated Signal Ground	IGND	

COMM - CAN Communication Connector			
Pin	Name	Description / Notes	1/0
1	CAN_H	CAN_H Line (Dominant High)	I
2	CAN_L	CAN _L Line (Dominant Low)	I
3	CAN_GND	CAN Ground	CGND
4	RESERVED	Reserved	-
5	RESERVED	Reserved	-
6	RESERVED	Reserved	-
7	CAN_GND	CAN Ground	CGND
8	RESERVED	Reserved	-

		FEEDBACK - Feedback Connector	
Pin	Name	Description / Notes	1/0
1	RESERVED	Reserved	-
2	RESERVED	Reserved	-
3	RESERVED	Reserved	-
4	REF OUT +	Resolver Reference/Excitation Output	0
5	REF OUT -	Resolver Reference/Excitation Output	0
6	SIN+	Resolver Sine Input	I
7	SIN-	Resolver Sine Input	I
8	COS+	Deschar Ossica Inc. 4	I
9	COS-	Resolver Cosine Input	I
10	RESERVED	Reserved	-
11	RESERVED	Reserved	-
12	SGN GND	Signal Ground	SGND
13	+5V OUT	+5V Encoder Supply Output (Short Circuit Protected)	0
14	PAI-3	Programmable Analog Input (12-bit Resolution)	I
15	RESERVED	Reserved	-





		I/O - Signal Connector	
Pin	Name	Description / Notes	1/0
1	PDO-1	Programmable Digital Output	0
2	SGN GND	Signal Ground	SGNE
3	PDO-2	Programmable Digital Output	0
4	PAI-1 + (REF+)	D''' (1.12	1
5	PAI-1 - (REF-)	Differential Programmable Analog Input or Reference Signal Input (16-bit Resolution)	- 1
6	PAI-2	Programmable Analog Input (12-bit Resolution)	I
7	PAO-1	Programmable Analog Output (10-bit Resolution)	0
8	PAO-2	Programmable Analog Output (10-bit Resolution)	0
9	PDI-8 - (DIR- / AUX ENC B- / CAP-C-)	Programmable Digital Input or Direction or Auxiliary Encoder or High Speed Capture (Leave Open for Single-Ended Signal)	I
10	PDO-3	Programmable Digital Output	0
11	PDI-1	Programmable Digital Input	- 1
12	PDI-2	Programmable Digital Input	- 1
13	PDI-3	Programmable Digital Input	I
14	PDO-4	Programmable Digital Output	0
15	+5V OUT	+5V Encoder Supply Output (Short Circuit Protected)	0
16	SGN GND	Signal Ground	SGN
17	PDI-7 + (PWM + / AUX ENC A+ / CAP- B+)	Programmable Digital Input or PWM or Auxiliary Encoder or High Speed Capture	1
18	PDI-8 + (DIR+ / AUX ENC B+ / CAP-C+)	Programmable Digital Input or Direction or Auxiliary Encoder or High Speed Capture	- 1
19	PDI-4 (CAP-A)	Programmable Digital Input or High Speed Capture	- 1
20	PDI-5	Programmable Digital Input	- 1
21	PDI-6	Programmable Digital Input	- 1
22	SGN GND	Signal Ground	SGN
23	RESERVED	Reserved	-
24	RESERVED	Reserved	-
25	RESERVED	Reserved	-
26	PDI-7 - (PWM- / AUX ENC A- / CAP-B-)	Programmable Digital Input or PWM or Auxiliary Encoder or High Speed Capture (Leave Open for Single-Ended Signals)	ı

POWER - Power Connector			
Pin	Name	Description / Notes	1/0
1	MOTOR A	Motor Phase A	0
2	MOTOR B	Motor Phase B	0
3	MOTOR C	Motor Phase C	0
4	HIGH VOLTAGE	DC Power Input	I
5	PWR GND	Power Ground (Common With Signal Ground)	PGND
6	LOGIC PWR	Logic Supply Input	I





# HARDWARE SETTINGS

# **Switch Functions**

Switch	Description	Setting	
Switch	Description	On	Off
1	Bit 0 of binary CANopen node ID. Does not affect RS-232 settings.	1	0
2	Bit 1 of binary CANopen node ID. Does not affect RS-232 settings.	1	0
3	Bit 2 of binary CANopen node ID. Does not affect RS-232 settings.	1	0
4	Bit 3 of binary CANopen node ID. Does not affect RS-232 settings.	1	0
5	Bit 4 of binary CANopen node ID. Does not affect RS-232 settings.	1	0
6	Bit 5 of binary CANopen node ID. Does not affect RS-232 settings.	1	0
7	Bit 0 of drive CANopen bit rate setting. Does not affect RS-232 settings.	1	0
8	Bit 1 of drive CANopen bit rate setting. Does not affect RS-232 settings.	1	0

#### Additional Details

The drive can be configured to use the address and/or bit rate stored in non-volatile memory by setting the address and/or bit rate value to 0. Use the table below to map actual bit rates to a bit rate setting.

Bit Rate (kbits/sec)	Value For Bit Rate Setting
Load from non-volatile memory	0
500	1
250	2
125	3

# **Jumper Settings**

Jumper	Description	Configuration		
	Header Jumper	Not Installed	Pins 1-2	Pins 2-3
J1	CAN bus termination. Install this jumper (2.54mm) on the last drive in a CAN network. This jumper is located on a 4-pin header adjacent to the RS-232 connector. It consists of the two pins furthest from the connector.	Non- terminating Node	Terminating Node	N/A
J2	Reserved.	-	-	N/A





# **MECHANICAL INFORMATION**


AUX COMM - RS232 Communication Connector				
Connector Information		3-pin, 2.5 mm spaced, enclosed, friction lock header		
Mating Connector	Details	Phoenix: Plug P/N 1881338		
	Included with Drive	Yes		
		3 ISO GND 2 RS232 TX 1 RS232 RX		

	(	COMM - CAN Communication Connector
Connector Information		Shielded, dual RJ-45 socket with LEDs
Mating Connector	Details	AMP: Plug P/N 5-569552-3
Mating Connector	Included with Drive	No
		A  CAN_GND 7  CAN_GND 3  CAN_L 2  CAN_L 7  CAN_GND 7  CAN_GND 3  CAN_L 2  CAN_L 1

		FEEDBACK - Feedback Connector
Connector Information		15-pin, high-density, female D-sub
Mating Connector	Details	TYCO: Plug P/N 748364-1; Housing P/N 5748677-1; Terminals P/N 1658670-2 (loose) or 1658670-1 (strip)
	Included with Drive	No
		SIN- 6 5 REF OUT - SIN- 7 4 REF OUT + COS- 9 12 SGN GND 13 +5V OUT 14 PAI-3





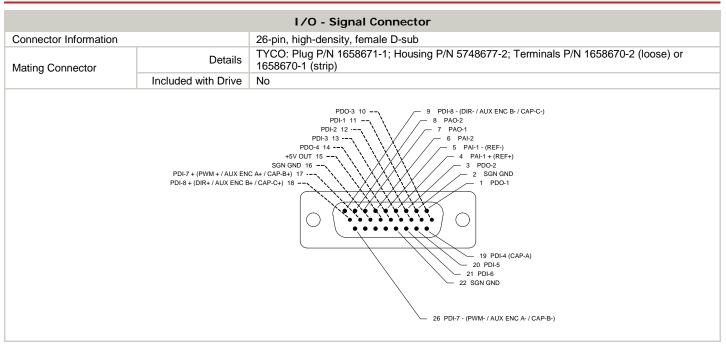


		POWER - Power Connector
Connector Information		6-pin, 3.96 mm spaced, friction lock header
Mating Connector	Details	AMP: Plug P/N 770849-6; Terminals P/N 770522-1 (loose) or 770476-1 (strip)
	Included with Drive	Yes
		⊢ 5 PWR GND






# MOUNTING DIMENSIONS

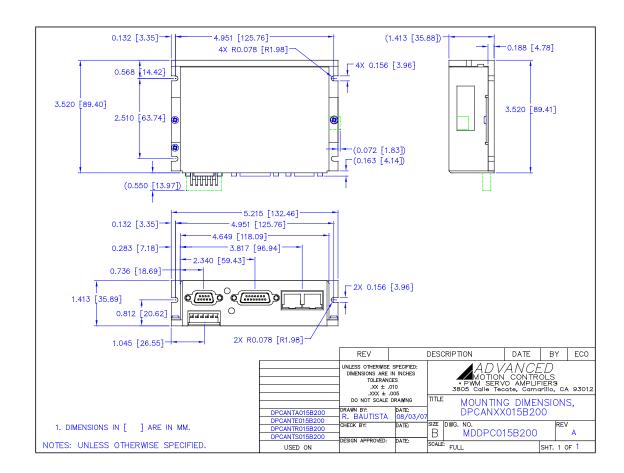





#### PART NUMBERING INFORMATION

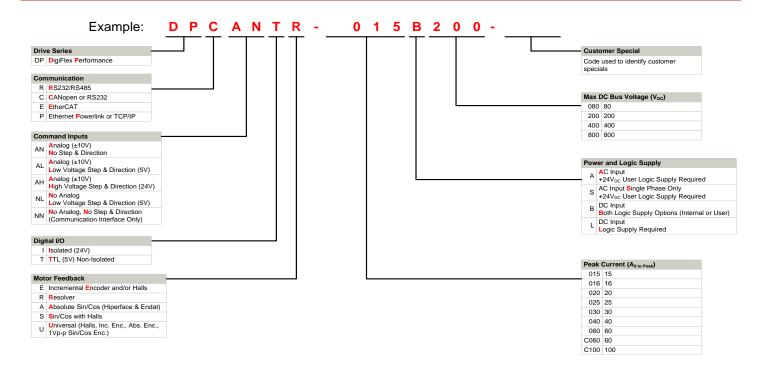

DigiFlex® Performance™ series of products are available in many configurations. Note that not all possible part number combinations are offered as standard drives. All models listed in the selection tables of the website are readily available, standard product offerings.

ADVANCED Motion Controls also has the capability to promptly develop and deliver specified products for OEMs with volume requests. Our Applications and Engineering Departments will work closely with your design team through all stages of development in order to provide the best servo drive solution for your system. Equipped with on-site manufacturing for quickturn customs capabilities, ADVANCED Motion Controls utilizes our years of engineering and manufacturing expertise to decrease your costs and time-to-market while increasing system quality and reliability. Feel free to contact Applications Engineering for further information and details.

#### **Examples of Customized Products**

- Optimized Footprint
- Private Label Software
- **OEM Specified Connectors**
- No Outer Case
- **Increased Current Resolution**
- Increased Temperature Range
- Custom Control Interface
- Integrated System I/O

- Tailored Project File 4
- Silkscreen Branding
- Optimized Base Plate
- **Increased Current Limits**
- Increased Voltage Range
- Conformal Coating 4
- Multi-Axis Configurations 4
- Reduced Profile Size and Weight

#### **Available Accessories**

ADVANCED Motion Controls offers a variety of accessories designed to facilitate drive integration into a servo system. Visit www.a-m-c.com to see which accessories will assist with your application design and implementation.

