

IAI

Quality and Innovation



EtherNet/IP Field Network Controllers

PCON-C/CG ACON-C/CG

PCON/ACONs are now available in EtherNet/IP-ready versions. International Standard Network allows high-speed communication with its peripheral devices.

Features

1

High-speed and high-volume communication

Allows 100Mbps high-speed communication, and the communication cycle can be set to each communication group. By setting an appropriate communication cycle to each communication group, high-speed mass transfer is attained.

2

Easy connection with peripherals

EtherNet/IP is a global open field network. It is specified by the ISO/IEC 61158 series and is incorporated by numerous manufacturers. With EtherNet/IP, IAI product can communicate with many peripheral devices.

3

Wire-saving

EtherNet/IP controllers input and output data to/from the master via an Ethernet cable. This not only reduces the number of wires, but also prevents mis-wiring and achieves greater ease of maintenance.

4

Operate by Remote I/O mode (position table movements) or through Direct Control

When operating an actuator you can choose to communicate with the controller in a mode most suited for the application. Remote I/O mode allows the selection of movements that have been predefined (varying positions, speeds, and other conditions) in the controller's position data table, whereas with Direct Control, these values may be specified directly to controller from the host.

EtherNet/IP is registered trademark of ODVA.

Sold & Serviced By:

 **ELECTROMATE**

Toll Free Phone (877) SERV098

Toll Free Fax (877) SERV099

www.electromate.com

sales@electromate.com

Types

	PCON-C/CG	ACON-C/CG
Connectable actuator	RCP2 series/RCP3 series	RCA series/RCA2 series/RCL series

Model Items

PCON Series — Type — Motor type — Encoder type — I/O type — I/O cable length — Power voltage

C Positioner type
CG Conforming to safety category compatible type

1 Incremental
EP EtherNet/IP
0 No cable
0 DC24V

20P	20 square pulse motor compatible	28P	28 square pulse motor compatible	28SP	28 square pulse motor compatible (*)
35P	35 square pulse motor compatible	42P	42 square pulse motor compatible	56P	56 square pulse motor compatible

* If a RCP2-RA3C/RGD3C is to be connected, specify 28SP for the motor type.

ACON Series — Type — Motor type — Encoder type — I/O type — I/O cable length — Power voltage


C Positioner type
CG Conforming to safety category compatible type

1 Incremental
EP EtherNet/IP
0 No cable
0 DC24V

2	2W motor	5	5W motor	10	10W motor
20S	20W motor (*)	20	20W motor	30	30W motor

* If a RCA-RA3/RGS3/RGD3 or RCA2-SA4/TA5 is to be connected, specify 20S for the motor type.

System Configuration (Connection Example)

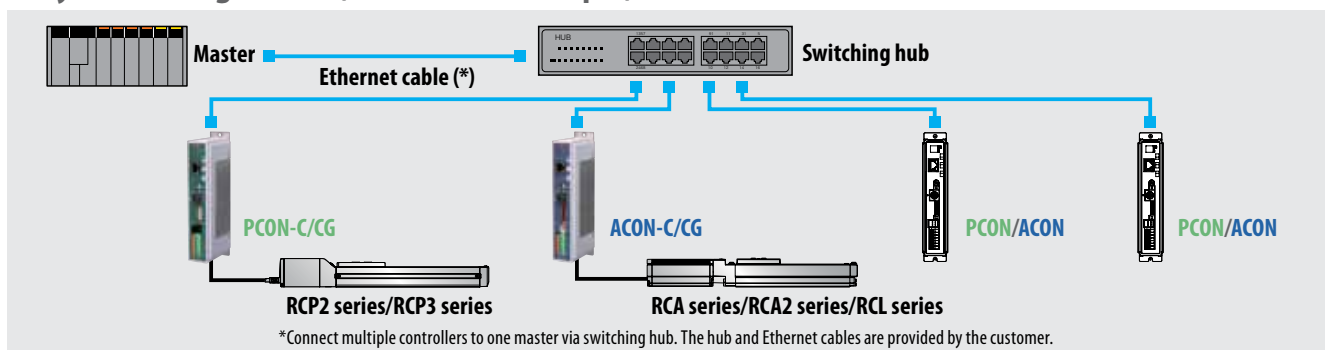

EtherNet/IP Communication Specifications


Item	Specification
Communication protocol	Dedicated EtherNet/IP protocol (Note 3)
Communication speed (Note 1)	10BASE-T/100BASE-T (Auto-negotiation setting is recommended)
Communication period	Automatically set according to the master
Communication cable length	Not to exceed 100 m between the hub and each node
Settable node addresses	0.0.0.0~255.255.255.255 (Set 192.168.0.1 at shipment)
Communication cable	Straight cable of category 5e or above (Double-shield cable braided with aluminum tape is recommended)
Connectors	RJ45 connector x 1
Connection hub (Note 2)	Switching hub

(Note 1) Make sure the link setting of the EtherNet/IP unit matches the communication mode set for the connected switching hub. If not, the link becomes unstable and communication cannot be performed properly. It is recommended to enable auto negotiation to set the baud rate for ACON and PCON. For farther detail on communication setting, please refer to the EtherNet/IP manual.

(Note 2) Build your network using a switching hub, without using a repeater hub. If a repeater hub is used, tag data link operation may become unstable. For details, refer to the operation manual for your master unit.

(Note 3) PCON/ACON Ethernet-IP products are compatible with CIP IMPLICIT messaging only (Remote I/O mode) and not CIP EXPLICIT messaging (Messaging mode). Therefore, our products are compatible with Allen Bradley Logix controllers (ControlLogix, CompactLogix, SoftLogix) based upon RSLogix5000 only. Our products are not compatible with AB legacy products (MicroLogix, SLC500, Pico, or PLC5) based on RS500 or other operating systems.

External Dimensions – PCON-C/CG, ACON-C/CG

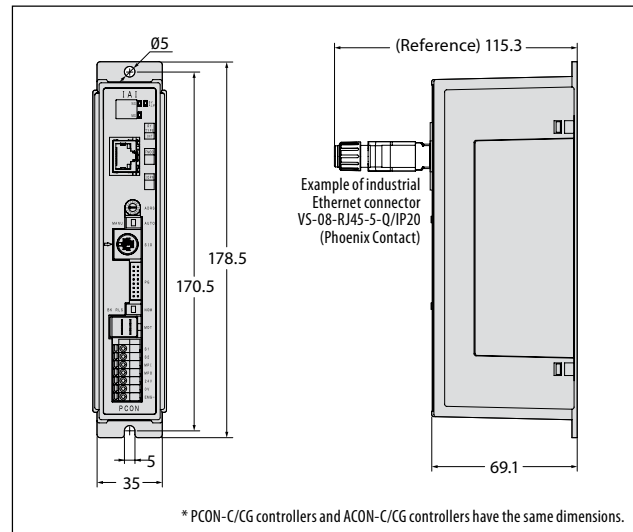

The versions of teaching tools supporting EtherNet/IP are listed below:
 • PC software: V8.02.00.00 or later • CON-PT/PD/PG: V1.20 or later
 • CON-T/TG: V1.10 or later • RCM-E/P: V2.20 or later

*If you are using any of these teaching tools of an earlier version, please contact IAI.