

Description

The DigiFlex® Performance™ (DP) Series digital servo drives are designed to drive brushed and brushless servomotors. These fully digital drives operate in torque, velocity, or position mode and employ Space Vector Modulation (SVM), which results in higher bus voltage utilization and reduced heat dissipation compared to traditional PWM. The command source can be generated internally or can be supplied externally. In addition to motor control, these drives feature dedicated and programmable digital and analog inputs and outputs to enhance interfacing with external controllers and devices.

This DP Series drive features a single RS-232/RS-485 interface used for drive configuration and setup. Drive commissioning is accomplished using DriveWare, available at www.a-m-c.com.

All drive and motor parameters are stored in non-volatile memory.

Power Range

| | |
|--------------------|-------------------------------|
| Peak Current | 16 A (11.3 A _{RMS}) |
| Continuous Current | 8 A (5.7 A _{RMS}) |
| Supply Voltage | 20 - 80 VDC |


Features

- ▲ Four Quadrant Regenerative Operation
- ▲ Space Vector Modulation (SVM) Technology
- ▲ Fully Digital State-of-the-art Design
- ▲ Programmable Gain Settings
- ▲ Fully Configurable Current, Voltage, Velocity and Position Limits
- ▲ PIDF Velocity Loop
- ▲ PID + FF Position Loop
- ▲ Compact Size, High Power Density
- ▲ 16-bit Analog to Digital Hardware

MODES OF OPERATION

- Current
- Position
- Velocity

COMMAND SOURCE

- ±10 V Analog
- 5V Step and Direction
- Encoder Following
- Over the Network

FEEDBACK SUPPORTED

- Resolver
- ±10 VDC Position
- Auxiliary Incremental Encoder
- Tachometer (±10 VDC)


INPUTS/OUTPUTS

- 3 Programmable Analog Inputs (16-bit/12-bit Resolution)
- 2 Programmable Analog Outputs (10-bit Resolution)
- 2 Programmable Digital Inputs (Differential)
- 4 Programmable Digital Inputs (Single-Ended)
- 4 Programmable Digital Outputs (Single-Ended)

COMPLIANCES & AGENCY APPROVALS

- CE Class A (LVD)
- CE Class A (EMC)
- RoHS

BLOCK DIAGRAM

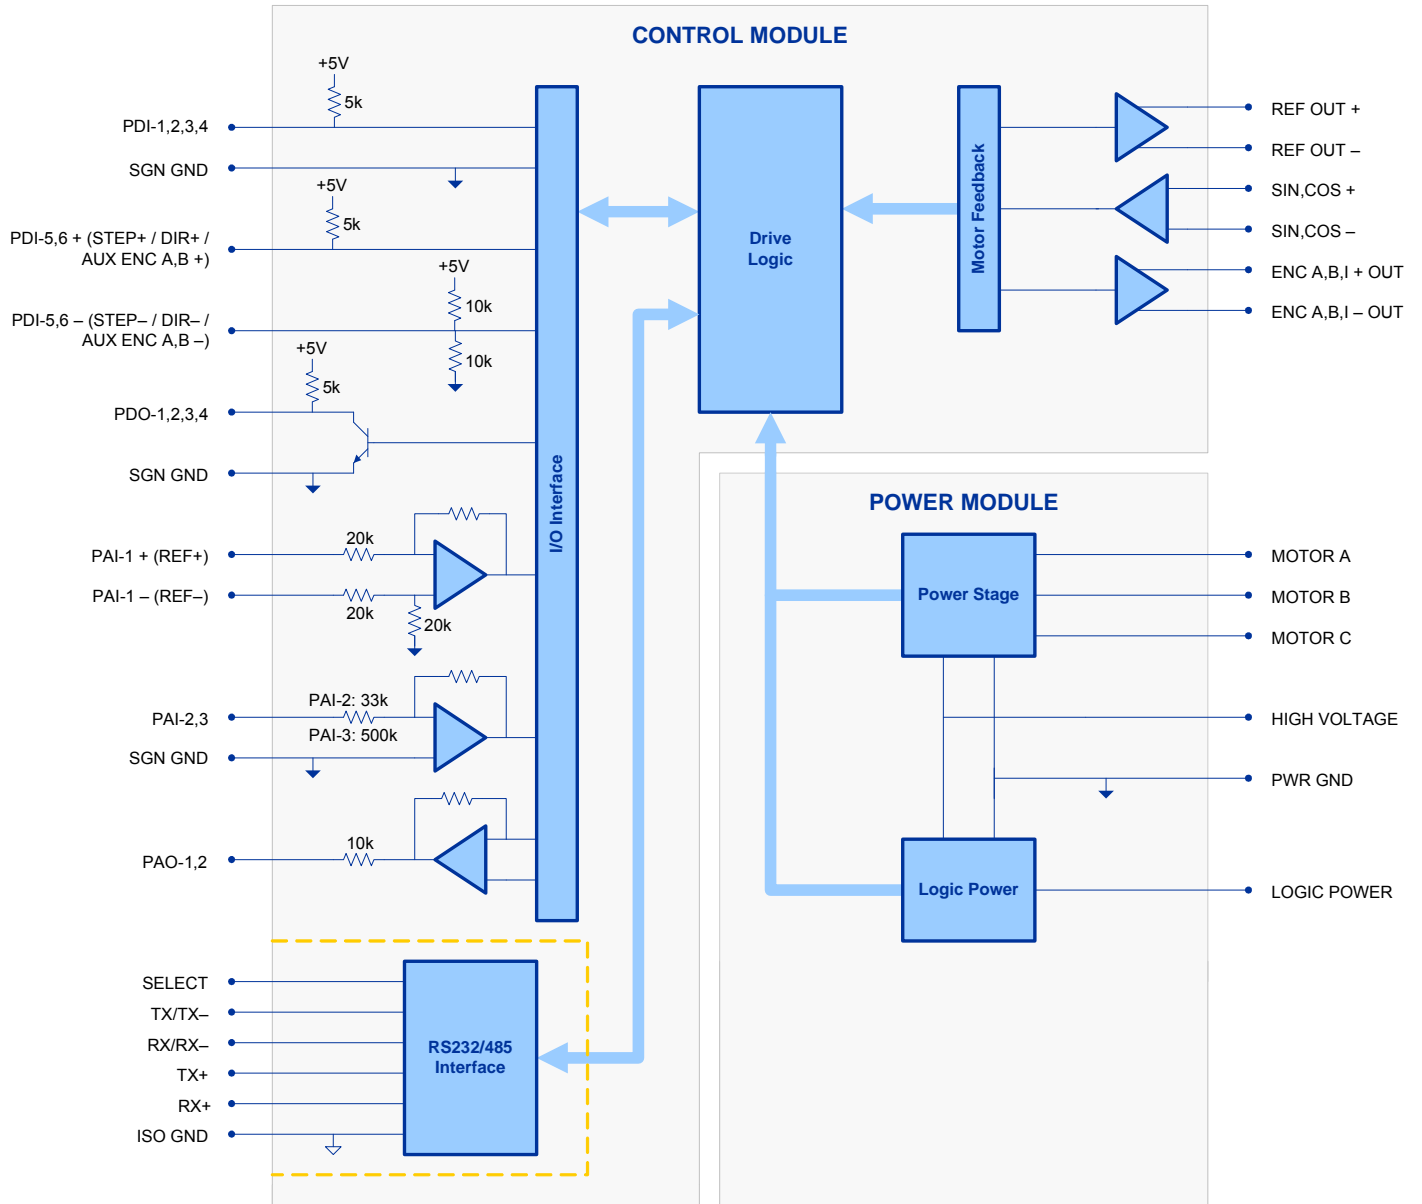

Information on Approvals and Compliances



Compliant with European CE for both the Class A EMC Directive 89/336/EEC on Electromagnetic Compatibility (specifically EN 61000-6-4:2001, EN 61000-6-2:2001, EN 61000-3-2:2000, and EN 61000-3-3:1995/A1:2001) and LVD requirements of directive 73/23/EEC (specifically EN 60204-1), a low voltage directive to protect users from electrical shock.



RoHS (Reduction of Hazardous Substances) is intended to prevent hazardous substances such as lead from being manufactured in electrical and electronic equipment.

SPECIFICATIONS

| Power Specifications | | |
|--|----------|---|
| Description | Units | Value |
| DC Supply Voltage Range | VDC | 20 - 80 |
| DC Bus Over Voltage Limit | VDC | 89 |
| DC Bus Under Voltage Limit | VDC | 17.5 |
| Logic Supply Voltage | VDC | 20 - 80 |
| Maximum Peak Output Current | A (Arms) | 16 (11.3) |
| Maximum Continuous Output Current | A (Arms) | 8 (5.7) |
| Maximum Continuous Output Power | W | 608 |
| Maximum Power Dissipation at Continuous Current | W | 32 |
| Internal Bus Capacitance | µF | 66 |
| Minimum Load Inductance (Line-To-Line) ¹ | µH | 250 |
| Switching Frequency | kHz | 20 |
| Low Voltage Supply Outputs | - | +5 VDC (250 mA) |
| Control Specifications | | |
| Description | Units | Value |
| Communication Interfaces | - | RS-485/232 |
| Command Sources | - | ±10 V Analog, 5V Step and Direction, Encoder Following, Over the Network |
| Feedback Supported | - | ±10 VDC Position, Auxiliary Incremental Encoder, Resolver, Tachometer (±10 VDC) |
| Commutation Methods | - | Sinusoidal |
| Modes of Operation | - | Current, Position, Velocity |
| Motors Supported | - | Closed Loop Vector, Single Phase (Brushed, Voice Coil, Inductive Load), Three Phase (Brushless) |
| Hardware Protection | - | 40+ Configurable Functions, Over Current, Over Temperature (Drive & Motor), Over Voltage, Short Circuit (Phase-Phase & Phase-Ground), Under Voltage |
| Programmable Digital Inputs/Outputs (PDIs/PDOs) | - | 6/4 |
| Programmable Analog Inputs/Outputs (PAIs/PAOs) | - | 3/2 |
| Primary I/O Logic Level | - | 5V TTL |
| Current Loop Sample Time | µs | 50 |
| Velocity Loop Sample Time | µs | 100 |
| Position Loop Sample Time | µs | 100 |
| Resolver Reference/Excitation Signal | Vrms | 4 Vrms @ 5 kHz |
| Expected Resolver Transformation Ratio | Vrms | 0.5 |
| Feedback Resolution / Emulated Encoder Resolution ² | bit | High Resolution Setting: 14, Low Resolution Setting: 12 |
| Maximum Motor Speed Per Feedback Resolution | RPM | High Resolution Setting: 5000, Low Resolution Setting: 20000 |
| Mechanical Specifications | | |
| Description | Units | Value |
| Agency Approvals | - | CE Class A (EMC), CE Class A (LVD), RoHS |
| Size (H x W x D) | mm (in) | 127 x 79.9 x 36.5 (5 x 3.1 x 1.4) |
| Weight | g (oz) | 401 (14.1) |
| Heatsink (Base) Temperature Range ³ | °C (°F) | 0 - 65 (32 - 149) |
| Storage Temperature Range | °C (°F) | -40 - 85 (-40 - 185) |
| Cooling System | - | Natural Convection |
| Form Factor | - | Panel Mount |
| IP Rating | - | IP10 |
| COMM Connector | - | 9-pin, female D-sub |
| FEEDBACK Connector | - | 15-pin, high-density, female D-sub |
| I/O Connector | - | 26-pin, high-density, female D-sub |
| POWER Connector | - | 6-pin, 3.96 mm spaced, friction lock header |

Notes

1. Lower inductance is acceptable for bus voltages well below maximum. Use external inductance to meet requirements.
2. Higher and lower resolution options are available. Contact Applications Engineering for more information.
3. Additional cooling and/or heatsink may be required to achieve rated performance.

PIN FUNCTIONS

| COMM - RS232/RS485 Communication Connector | | | |
|--|----------------------|--|------|
| Pin | Name | Description / Notes | I/O |
| 1 | SELECT | RS232/485 selection. Pull to ground (CN1-5) for RS485. | I |
| 2 | RS232 TX / RS485 TX- | Transmit Line (RS-232 or RS-485) | O |
| 3 | RS232 RX / RS485 RX- | Receive Line (RS-232 or RS-485) | I |
| 4 | RESERVED | Reserved | - |
| 5 | ISO GND | Isolated Signal Ground | IGND |
| 6 | RS485 TX+ | Transmit Line (RS-485) | O |
| 7 | RESERVED | Reserved | - |
| 8 | RS485 RX+ | Receive Line (RS-485) | I |
| 9 | RESERVED | Reserved | - |

| FEEDBACK - Feedback Connector | | | |
|-------------------------------|-----------|---|------|
| Pin | Name | Description / Notes | I/O |
| 1 | RESERVED | Reserved | - |
| 2 | RESERVED | Reserved | - |
| 3 | RESERVED | Reserved | - |
| 4 | REF OUT + | Resolver Reference/Excitation Output | O |
| 5 | REF OUT - | | O |
| 6 | SIN+ | Resolver Sine Input | I |
| 7 | SIN- | | I |
| 8 | COS+ | Resolver Cosine Input | I |
| 9 | COS- | | I |
| 10 | RESERVED | Reserved | - |
| 11 | RESERVED | Reserved | - |
| 12 | SGN GND | Signal Ground | SGND |
| 13 | +5V OUT | +5V Encoder Supply Output (Short Circuit Protected) | O |
| 14 | PAI-3 | Programmable Analog Input (12-bit Resolution) | I |
| 15 | RESERVED | Reserved | - |

| I/O - Signal Connector | | | |
|------------------------|------------------------------|---|------|
| Pin | Name | Description / Notes | I/O |
| 1 | PDO-1 | Programmable Digital Output | O |
| 2 | SGN GND | Signal Ground | SGND |
| 3 | PDO-2 | Programmable Digital Output | O |
| 4 | PAI-1 + (REF+) | Differential Programmable Analog Input or Reference Signal Input (16-bit Resolution) | I |
| 5 | PAI-1 - (REF-) | | I |
| 6 | PAI-2 | Programmable Analog Input (12-bit Resolution) | I |
| 7 | PAO-1 | Programmable Analog Output (10-bit Resolution) | O |
| 8 | PAO-2 | Programmable Analog Output (10-bit Resolution) | O |
| 9 | PDI-6 - (DIR- / AUX ENC B-) | Programmable Digital Input or Direction- or Auxiliary Encoder (For Differential Signals Only) | I |
| 10 | PDO-3 | Programmable Digital Output | O |
| 11 | PDI-1 | Programmable Digital Input | I |
| 12 | PDI-2 | Programmable Digital Input | I |
| 13 | PDI-3 | Programmable Digital Input | I |
| 14 | PDO-4 | Programmable Digital Output | O |
| 15 | +5V OUT | +5V Encoder Supply Output (Short Circuit Protected) | O |
| 16 | SGN GND | Signal Ground | SGND |
| 17 | PDI-5 + (STEP+ / AUX ENC A+) | Programmable Digital Input or Step+ or Auxiliary Encoder | I |
| 18 | PDI-6 + (DIR+ / AUX ENC B+) | Programmable Digital Input or Direction+ or Auxiliary Encoder | I |
| 19 | PDI-4 | Programmable Digital Input | I |
| 20 | ENC A+ OUT | Emulated Encoder Channel A Output | O |
| 21 | ENC A- OUT | | O |
| 22 | ENC B+ OUT | Emulated Encoder Channel B Output | O |
| 23 | ENC B- OUT | | O |
| 24 | ENC I+ OUT | Emulated Encoder Index Output | O |
| 25 | ENC I- OUT | | O |
| 26 | PDI-5 - (STEP- / AUX ENC A-) | Programmable Digital Input or Step- or Auxiliary Encoder (For Differential Signals Only) | I |

POWER - Power Connector

| Pin | Name | Description / Notes | I/O |
|-----|--------------|--|------|
| 1 | MOTOR A | Motor Phase A | O |
| 2 | MOTOR B | Motor Phase B | O |
| 3 | MOTOR C | Motor Phase C | O |
| 4 | HIGH VOLTAGE | DC Power Input | I |
| 5 | PWR GND | Power Ground (Common With Signal Ground) | PGND |
| 6 | LOGIC PWR | Logic Supply Input | I |

HARDWARE SETTINGS

Switch Functions

| Switch | Description | Setting | |
|--------|---|---------|-----|
| | | On | Off |
| 1 | Bit 0 of binary RS-485 drive address. Does not affect RS-232 settings. | 1 | 0 |
| 2 | Bit 1 of binary RS-485 drive address. Does not affect RS-232 settings. | 1 | 0 |
| 3 | Bit 2 of binary RS-485 drive address. Does not affect RS-232 settings. | 1 | 0 |
| 4 | Bit 3 of binary RS-485 drive address. Does not affect RS-232 settings. | 1 | 0 |
| 5 | Bit 4 of binary RS-485 drive address. Does not affect RS-232 settings. | 1 | 0 |
| 6 | Bit 5 of binary RS-485 drive address. Does not affect RS-232 settings. | 1 | 0 |
| 7 | Bit 0 of drive RS-485 baud rate setting. Does not affect RS-232 settings. | 1 | 0 |
| 8 | Bit 1 of drive RS-485 baud rate setting. Does not affect RS-232 settings. | 1 | 0 |

Additional Details


The drive can be configured to use the address and/or bit rate stored in non-volatile memory by setting the address and/or bit rate value to 0. Use the table below to map actual bit rates to a bit rate setting.

| Baud Rate (kbps) | Value For Bit Rate Setting |
|-------------------------------|----------------------------|
| Load from non-volatile memory | 0 |
| 9.6 | 1 |
| 38.4 | 2 |
| 115.2 | 3 |

MECHANICAL INFORMATION


COMM - RS232/RS485 Communication Connector

| | | |
|-----------------------|---------------------|--|
| Connector Information | 9-pin, female D-sub | |
| Mating Connector | Details | TYCO: Plug P/N 205204-4; Housing P/N 5748677-1; Terminals P/N 1658540-5 (loose) or 1658540-4 (strip) |
| | Included with Drive | No |




FEEDBACK - Feedback Connector

| | | |
|-----------------------|------------------------------------|--|
| Connector Information | 15-pin, high-density, female D-sub | |
| Mating Connector | Details | TYCO: Plug P/N 748364-1; Housing P/N 5748677-2; Terminals P/N 1658670-2 (loose) or 1658670-1 (strip) |
| | Included with Drive | No |

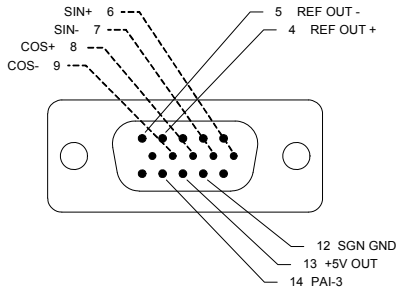


I/O - Signal Connector

| | | |
|-----------------------|---------------------|---|
| Connector Information | | 26-pin, high-density, female D-sub |
| Mating Connector | Details | TYCO: Plug P/N 1658671-1; Housing P/N 5748677-3; Terminals P/N 1658670-2 (loose) or 1658670-1 (strip) |
| | Included with Drive | No |

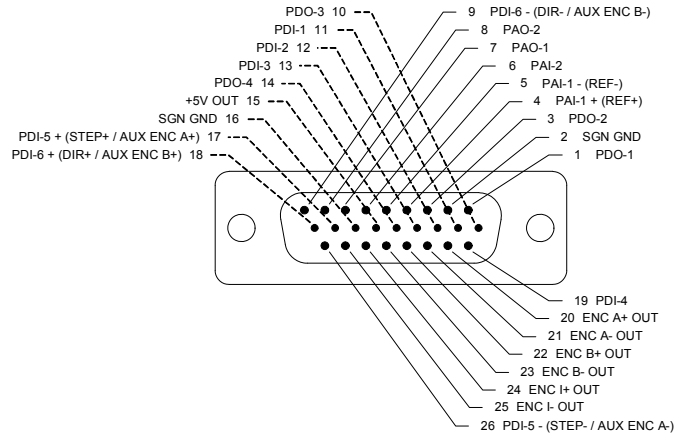


POWER - Power Connector


| | | |
|-----------------------|---------------------|--|
| Connector Information | | 6-pin, 3.96 mm spaced, friction lock header |
| Mating Connector | Details | AMP: Plug P/N 770849-6; Terminals P/N 770522-1 (loose) or 770476-1 (strip) |
| | Included with Drive | Yes |

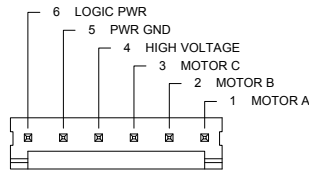

MOUNTING DIMENSIONS

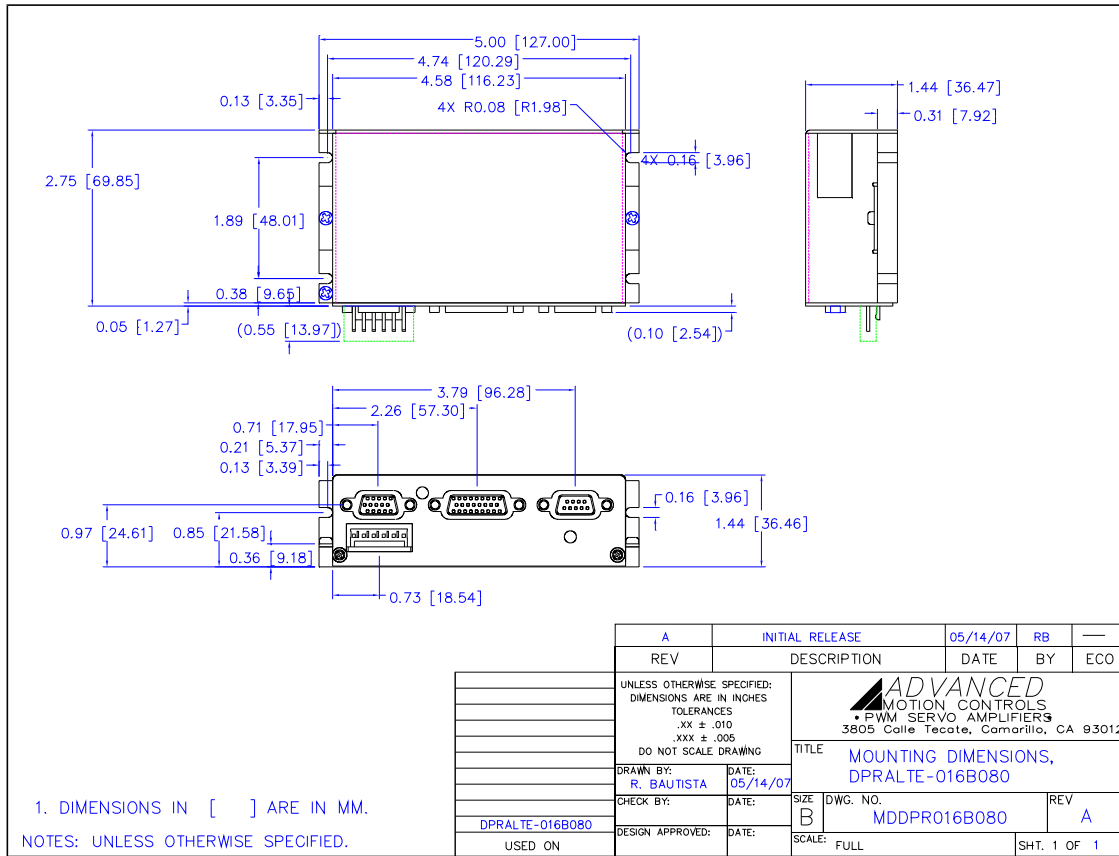

PART NUMBERING INFORMATION

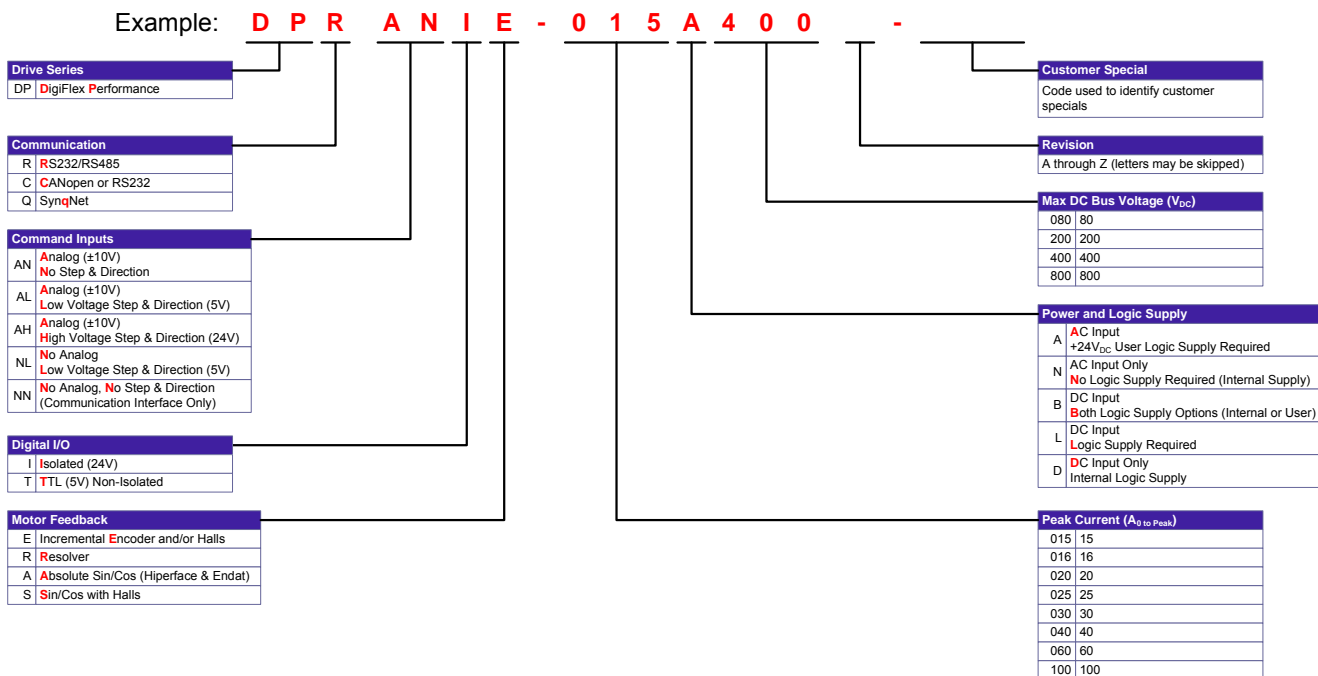

DigiFlex® Performance™ series of products are available in many configurations. All models listed in the selection tables of the website are readily available, standard product offerings.

ADVANCED Motion Controls also has the capability to promptly develop and deliver specified products for OEMs with volume requests. Our Applications and Engineering Departments will work closely with your design team through all stages of development in order to provide the best servo drive solution for your system. Equipped with on-site manufacturing for quick-turn customs capabilities, ADVANCED Motion Controls utilizes our years of engineering and manufacturing expertise to decrease your costs and time-to-market while increasing system quality and reliability. Feel free to contact Applications Engineering for further information and details.

Examples of Customized Products

- ▲ Optimized Footprint
- ▲ Private Label Software
- ▲ OEM Specified Connectors
- ▲ No Outer Case
- ▲ Increased Current Resolution
- ▲ Increased Temperature Range
- ▲ Custom Control Interface
- ▲ Integrated System I/O
- ▲ Tailored Project File
- ▲ Silkscreen Branding
- ▲ Optimized Base Plate
- ▲ Increased Current Limits
- ▲ Increased Voltage Range
- ▲ Conformal Coating
- ▲ Multi-Axis Configurations
- ▲ Reduced Profile Size and Weight

Available Accessories

ADVANCED Motion Controls offers a variety of accessories designed to facilitate drive integration into a servo system. Visit www.a-m-c.com to see which accessories will assist with your application design and implementation.

