



Mini
Standard
ontrollers
integrated
Rod
Type
Mini
Standard
Controllers
Integrated

Controllers
PMEC /AMEC
PSEP /ASEP
ROBO NET
ERC2
PCON
ACON
SCON
PSEL
SSEL

Type

■ Configuration: RCP2 — SA5C

ROBO Cylinder Slider Type 52mm Width Pulse Motor Straight Type Coupled

**42P** Encoder Motor Option 42P: Pulse motor 12:12mm 50: 50mm P1:PCON

I: Incremental

\* The Simple
absolute encoder
models are
labeled as "I". 6: 6mm 3: 3mm 42 
size 800:800mm (50mm pitch \* See page Pre-35 for explanation of each code that makes up the configuration name

RPCON PSEL P3:PMEC

N : Non P : 1m S : 3m M : 5m X : Custom Length R : Robot cable SR : Slider Roller

BE: Brake (Cable exiting end)
BL: Brake (Cable exiting left)
BR: Brake (Cable exiting right) NM: Reversed-home

Technical References


1) When the stroke increases, the maximum speed will drop to prevent the ball screw from reaching the critical rotational speed. Use the actuator specification table below to check the maximum speed at the stroke you desire.

Since the RCP2 series use a pulse motor, the load capacity decreases at high speeds Check in the Speed vs. Load Capacity graph to see if your desired speed and load capacity are supported.

3)The load capacity is based on operation at an acceleration of 0.3G (0.2G for the 3mm-lead model, or when used vertically). The maximum acceleration is 0.7G (0.3G when used vertically), however, note that the load capacity decreases at high accelerations. For more information, see the table of load capacity by acceleration, on page A-53.

■ Speed vs. Load Capacity Due to the characteristics of the pulse motor, the RCP2 series' load capacity decreases at high speeds. In the table below, check if your

desired speed and load capacity are supported.



300

Speed (mm/s)

400

500 600 700

(Unit: mm/s)

Actuator Specifications				
■ Lead and Load Capacity (Note 1) Plea	ase note that the maxi	mum load capacity	decreases as the	speed increase
Model	Lead	Max. Load Ca	Stroke	
Wiodei	(mm)	Horizontal (kg)	Vertical (kg)	(mm)
RCP2-SA5C-I-42P-12-①-②-③-④	12	~ 6	1	
RCP2-SA5C-I-42P-6-①-②-③-④	6	~ 13	~ 4	50 ~ 800 (50mm increments)
RCP2-SA5C-I-42P-3-①-②-③-④	3	16	~ 8	o.omenta)

	■ Stroke and Maximum Speed								
	Stroke Lead	$50\sim550$ (50mm increments)	600 (mm)	650 (mm)	700 (mm)	750 (mm)	800 (mm)		
	12	600	540	460	400	360	300		
	6	300	270	230	200	180	150		
	3	150	135	115	100	90	75		

Stroke (mm)	Standard Price
50	-
100	-
150	-
200	-
250	-
300	-
350	-
400	-
450	-
500	-
550	-
600	-
650	-
700	-
750	-
800	-

Legend ① Stroke ② Compatible controller ③ Cable length ④ Options

## ④ Option List

Name	Option Code	See Page	Standard Price
Brake (Cable-exit end)	BE	→ A-25	_
Brake (Cable exiting left)	BL	→ A-25	_
Brake (Cable exiting right)	BR	→ A-25	_
Reversed-home	NM	→ A-33	_
Slider Roller	SR	→ A-36	_

③ Cable List

100 200

Туре	Cable Symbol	Standard Price
	P (1m)	-
Standard	S (3m)	-
	M (5m)	-
Special Lengths	X06 (6m) ~ X10 (10m)	-
	X11 (11m) ~ X15 (15m)	-
	X16 (16m) ~ X20 (20m)	-
	R01 (1m) ~ R03 (3m)	-
Robot Cable	R04 (4m) ~ R05 (5m)	-
	R06 (6m) ~ R10 (10m)	-
	R11 (11m) ~ R15 (15m)	-
	R16 (16m) ~ R20 (20m)	_

Description

Ma direction: 150mm or less; Mb·Mc direction: 150mm or less

Ball screw Ø10mm C10 grade

Material: Aluminum (special alumite treated)

Ma: 18.6 N·m Mb: 26.6 N·m Mc: 47.5 N·m

Ma: 4.9 N·m Mb: 6.8 N·m Mc: 11.7 N·m

0~40°C, 85% RH or less (Non-condensing)

±0.02mm

0.1mm or less

(\*) Based on 5,000km travel life. **Directions of Allowable Load Moments** 

Actuator Specifications Item

Drive System

Lost Motion

Base

Positioning Repeatability

Allowable Static Moment

Overhang Load Length

Allowable Dynamic Moment (\*)

Ambient Operating Temp./Humidity








**27** RCP2-SA5C

<sup>\*</sup> See page A-39 for cables for maintenance.

For Special Orders



\*For the Reversed-home model, the dimensions (distance to home) on the motor-side and that on the opposite side are flipped.

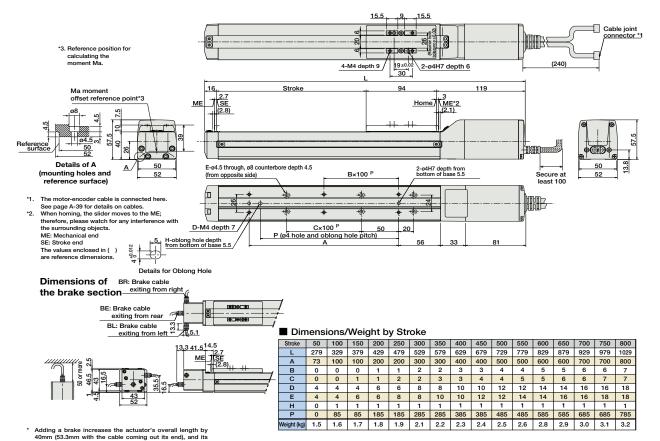

# ② Compatible Controllers

weight by 0.4kg.

	External View	Model		Max. Positioning Points				See Pag		
Solenoid Valve Type	110	PMEC-C-42PI-NP-2-①	Easy-to-use controller, even for beginners		AC100V AC200V	See P481	-	→ P47		
Solenoid valve Type	1	PSEP-C-42PI-NP-2-0-H	Operable with same signal as solenoid valve.  Supports both single and double solenoid types.	3 points			-	→ P48		
Splash-Proof Solenoid Valve Type		PSEP-CW-42PI-NP-2-0-H	No homing necessary with simple absolute type.				-	7140		
Positioner Type	Ĭ.	PCON-C-42PI-NP-2-0-H	Positioning is possible for up to 512 points	512 points	512 points			-		
Safety-Compliant Positioner Type		PCON-CG-42PI-NP-2-0-H					-			
Pulse Train Input Type (Differential Line Driver)	ΔÎ	PCON-PL-42PI-NP-2-0-H	Pulse train input type with differential line driver support			DC24V	2A max.	-	→ P52	
Pulse Train Input Type (Open Collector)		PCON-PO-42PI-NP-2-0-H	Pulse train input type with open collector support					-		
Serial Communication Type		PCON-SE-42PI-N-0-0-H	Dedicated to serial communication	64 points					-	
Field Network Type		RPCON-42P-H	Dedicated to field network	768 points			-	→ P50		
Program Control Type		PSEL-C-1-42PI-NP-2-0-H	Programmed operation is possible Can operate up to 2 axes	1500 points			-	→ P5		

\* This is for the single-axis PSEL. \* ① is a placeholder for the power supply voltage (1: 100V / 2: 100  $\sim$  240V).

IAI

RCP2-SA5C **28** 



PMEC (AMEC PSEP / ASEP / ASEP PCON ACON SCON PSEL ASEL