# **Temposonics**®

Magnetostrictive, Absolute, Non-contact Linear-Position Sensors



# MH-Series Mobile Hydraulic in-Cylinder Sensor

Model MH CANopen, CAN J1939 Output

**Data Sheet** 





**Cylinder Application Example** 

#### **FEATURES**

- Linear, Absolute Measurement in Hydraulic Cylinders
- Non-Contact Sensing Technology
- Superior Accuracy, < ± 0.04% F.S.
- **■** Hysteresis < ± 0.1 mm
- Repeatability,  $< \pm 0.005\%$  F.S.
- Compact Design for Embedded Cylinder Applications
- Direct CANopen or J1939 Output: Displacement and Velocity
- Stroke length: 50 mm (2 in.) to 2500 mm (98 in.)
- Voltage input: 12/24 Vdc
- Shock Rating: 100 g (single hit) / IEC 68-2-27
- Vibration Rating 25 g / 10-2000 Hz/IEC 68-2-6
- 200 V/m EMI Immunity

#### **BENEFITS**

- Rugged Mobile Sensor
- Direct CANopen or CAN J1939

#### **APPLICATIONS**

- **■** Continuous Operation In Harsh Mobile Conditions
- High Pressure Conditions
- **■** For Welded and Tie-rod Cylinder Applications

#### **TYPICAL INDUSTRIES**

- **■** Construction
- **■** Agriculture
- Off-highway Machinery

#### **Product overview**

The MH-Series Model MH sensor is designed with the "mobile" world in mind. The Model MH sensor is validated in the field by customers worldwide. Performance is second-to-none with high EMI resistance of 200 V/m. Ruggedness is "designed in"; 100 g shock and 25 g vibration rating. The model MH CAN sensor can be fully sealed and embedded in a cylinder to ensure a long operating life. Direct connection to the Temposonics® M12x1 connector system and other proven mobile connectors are available.



## MH-Series Rod-Style Sensor - CANopen, CAN J1939 Output Product Overview and Specifications

# **Product specifications**

Parameters	Specifications		
OUTPUT			
Measured variable:	Linear Position and velocity measurement		
Outputs:	Direct CANopen or CAN J1939		
Resolution:	Range:	Resolution:	
	50 to 500 mm 750 mm 1,000 mm 1.250 mm 1,750 mm	± 0.10 mm ± 0.10 mm ± 0.10 mm ± 0.10 mm ± 0.10 mm	
Stroke length:	50 mm to 2500 mm (2 in. to 98 in.) Measured in 5 mm (0.20 in.) increments		
Linearity uncorrected:	< ± 0.04% full stroke (minimum ± 0.100 mm 0.003 in.) < ± 0.08% full stroke (for short damping zone)		
Repeatability:	< ± 0.005% of full stroke		
Hysteresis:	± 0.1 mm (0.003 in.)		
Operating voltage:	12/24 Vdc (8-32 Vdc)		
Power drain:	< 1.5 W		
ELECTRONICS			
Electrical isolation:	500 Vdc (DC ground to machine ground)		
Polarity protection:	Up to -36 Vdc		
Overvoltage protection:	Up to 36 Vdc		

Specifications				
ENVIRONMENTAL				
<b>Operating:</b> -40 °C (-40 °F) to +105 °C (221 °F) <b>Storage:</b> -30 °C (-22 °F) to +105 °C (221 °F) 90% relative humidity, no condensation				
200 V/m: ISO 11452-5 ISO 14982 - Agriculture and forest machinery				
100 g (single hit)/IEC standard 68-2-27 (survivability) 25 g / 10 to 2000 Hz /IEC standard 68-2-6				
<b>Sensor rod, 10 mm (0.39 in.):</b> 25 g <b>Sensor rod, 7 mm (0.27 in.):</b> 15 g				
One 5-wire with the M12 x 1 connector and flange (provides IP69K environmental protection when installed in a cylinder).				
ROD STYLE SENSOR (Model MH)				
Sensor rod: Stainless steel 1.4306 / AISI 304L Housing: Stainless steel 1.4305 / AISI 303 Mechanical assembly: Flange housing 48 mm (1.89 in.) dia., O-ring 40.87 x 3.53 mm NBR 80, backup ring 42.6 x 48 x 1.4 PTFE				
IP67 (IP69k when installed inside a cylinder with M12 x 1 in. connection type)				
<b>Sensor rod, 10 mm (0.39 in.):</b> Operating, 350 bar (5076 psi) Peak, 530 bar (7687 psi)				
<b>Sensor rod, 7 mm (0.27 in.):</b> Operating, 300 bar (4350 psi) Peak, 400 bar (5800 psi)				
Ring magnet (see standard magnet selections)				



### **Output options**

The MH-Series Model MH position CAN sensor provides direct CANopen and CAN J1939 outputs.

#### **Model MH sensor dimension references**

Model MH, rod-style Redundant Sensor Drawing is for reference only, contact applications engineering for tolerance specific information.

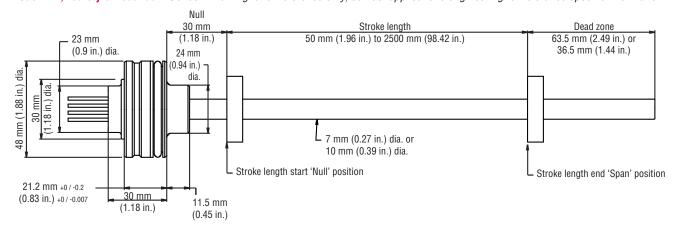


Figure 1. MH-Series Model MH rod-style sensor dimension reference

### Standard magnet selections (Model MH)

#### SELECTION OF POSITION MAGNETS (MAGNET AND MAGNET SPACER MUST BE ORDERED SEPARATELY)

A choice of three magnets are available with the Model MH rod-style sensor. Magnets must be ordered separately with Model MH position sensors. The standard ring magnet (part number 201542-2) is suitable for most applications.

#### STANDARD RING MAGNET Part number 201542-2

# MAGNET SPACER Part number 400633 (used with magnet part no.: 201542-2)

#### RING MAGNET Part number 400533

# RING MAGNET Part number 401032



Material: Ferrite PA I.D.: 13.5 mm (0.53 in.) O.D.: 33 mm (1.3 in.) Thickness: 8 mm (0.3 in.) Operating temperature: - 40 °C (-40 °F) to

- 105 °C to (221 °F)



Material: Non-ferrous Used with ring magnet (part no.: 201542-2) I.D.: 14 mm (0.56 in.)

**1.D.**: 14 mm (0.56 in.) **0.D.**: 32 mm (1.25 in.) **Thickness:** 3.2 mm (0.125 in.)



Material: Ferrite PA I.D.: 13.5 mm (0.53 in.) O.D.: 25.4 mm (1 in.) Thickness: 8 mm (0.3 in.) Operating temperature: -40 °C (-40 °F) to -105 °C to (221 °F)

Material: Ferrite PA
I.D.: 13.5 mm (0.53 in.)
O.D.: 17 mm (0.68 in.)
Thickness: 8 mm (0.31 in.)
Operating temperature:

- 40 °C (-40 °F) to - 105 °C to (221 °F)

# Model MH Rod-Style Sensor - CANopen, CAN J1939 Output Installation

#### Model MH sensor installation references

The robust Temposonics Model MH sensor's new stainless-steel position sensor is designed for direct stroke measurement in mobile hydraulic cylinders. The Temposonics Model MH sensor can be installed from the head side or the rod side of the cylinder depending on the cylinder design.

#### **Installation Notes:**

- 1. Use a non-ferrous circlip to fix the magnet.
- 2. The piston rod bore is dependent on hydraulic pressure and piston velocity. Minimum drilling for a (10 mm rod) should be 13.5 mm.
- 3. There should be no less than 3 mm clearance between the end of the sensor rod and the bottom of the rod bore at full retraction.

Model MH, rod-style sensor mechanical installation Drawing is for reference only, contact applications engineering for tolerance specific information.


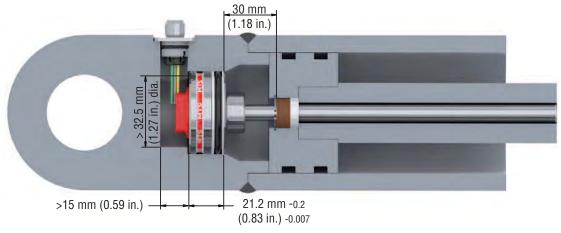


Figure 2. MH-Series Model MH rod-style sensor mechanical installation example

Model MH, rod-style sensor installation Drawings are for reference only, contact applications engineering for tolerance specific information.


Installation methods are possible in magnetic and non-magnetic applications (shown in *Figures 3 and 4*) and are entirely dependent on the cylinder design. While the most common method of installation is from the rod side of the cylinder, installation from the head side of the cylinder is also possible. In both installation methods, the sensor seals the cylinder by using an O-Ring and backup ring which is installed on the sensor housing.

#### Magnetic material installation reference




**Figure 3.** Model MH installation in magnetic material using a non-ferrous magnet spacer.

#### Non-magnetic material installation reference



**Figure 4.** Model MH installation in non-magnetic material (without a non-ferrous magnet spacer).

#### Set screw detail

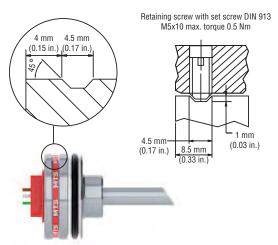




sales@electromate.com

### **Connections and wiring**

#### **CONNECTION TYPE**

The Temposonics® M12 connector system (shown in *Figures 7, 8, 9 and 10*), meets the most stringent protection requirements important for the difficult environmental conditions of mobile hydraulics applications. Protection type IP69K makes the robust metal housing not only completely dust and waterproof, even the harshest cleaning measures cannot damage the sensor.

Model MH, rod-style sensor connector and pin assignments Drawings are for reference only, contact applications engineering for tolerance specific information.

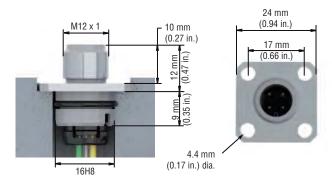

**CAN Pin Assignment** 





Figure 5. Model MH sensor connection dimensions

MOUNTING THE CONNECTOR SYSTEM TO THE CYLINDER



**Figure 7.** The MH sensor is delivered by MTS together with the new connector system: The connector insert carrier is already connected to the sensor electronics, i.e. no soldering, any color or connection mistake.



Figure 6. M12 x 1 connector system pin assignments

**Figure 8.** The connector insert is taken out of the cylinder through a bore hole. The flange housing can be snapped into position easily from outside.



**Figure 9.** Four standard screws must be tightened to mount the connector system on the cylinder.



**Figure 10.** With a corresponding mating molded plug the connector system fulfills a ingress rating of IP69K.



# Model MH Rod-Style Sensor - CANopen, CAN J1939 Output Ordering Information

## MH-Series Model MH ordering information


Use the table below to configure your sensor part number.				
M H M M M	$\overline{}$	Т		
1 2 3 4 5 6 7 8 9 10 11 12 13 14	15 16	17	18 19	
SENSOR MODEL		M	H 1-2	
MH = Rod-style with pressure fit flange housing 48 mm (1.88 in.) dia.				
SENSOR STYLES	<b>—</b> =		3	
C = Rod-style 10 mm (0.39 in.) dia.	,			
D = Rod-style 7 mm (0.27 in.) dia. damping zone 63.5 mm (2.49 in.)				
<b>E</b> = Rod-style 10 mm (0.39 in.) dia.				
reduced damping zone 36.5 mm (1.44 in.)  STROKE LENGTH (ORDER LENGTH)	$\top$	М	4-8	
M = Millimeters				
50 to 2500 mm (in 5 mm increments)				
CONNECTION TYPE — = =			9-12	
N = Wire exit:				
Integral 'single wires', each conductor: 0.5 mm² (20 AWG)				
Termination type:  N _ A = Pigtail (stripped conductors) no termination				
N _ F = 5 single wires, M12x1 IP69K, 5 pin (pin assignment 2-3-4-5)				
Wire length:				
<b>06</b> = 60 mm (2.36 in.) min. wire length				
25 = 250 mm (9.84 in.) max. wire length				
Cable exit:  4 conductor/ cable integral PUR cable, pigtailed, 4 cables, shielded. Cable length (first digit x 1m, second digit x 0.1 m).				
10 = 1.0 m length (standard all other lengths require minimum order quantities: 0.5 m min. to 9.9 max.: 0.1 m increments)				
Termination type:				
A = Pigtail (stripped conductors) Contact factory for termination				
INPUT VOLTAGE  3 = +12/24 Vdc	=	3	13	
OUTPUT	$\overline{}$		14-19	
=			14-19	
CO1 = CANopen				
<b>J01</b> = SAE J1939				
17 digit Baud rate				
0 = 1000 kBit				
2 = 500 kBit 5 = Reserved 8 = 10 kBit				
18 + 19 digit: Node-ID				
= CANopen: hex 01 to 7F (default node ID is 7F)				
= J1939: hex 01 to FD (default node ID is FD)				


## **Magnet selections and optional Test kit**

Magnet selections and the MH-Series CAN test kit part no.: 253879, must be ordered separately. Refer to the tables below for ordering information.

Magnet selections	Part no.
Ring magnet, 0.D. 17.4 mm (0.68 in.)	401032
Ring magnet, O.D. 25.4 mm (0.99 in.)	400533
Ring magnet, O.D. 33 mm (1.29 in.)	201542-2
Non-ferrous magnet spacer‡	400633

<sup>‡</sup> Used with ring magnet part no.: 201542-2

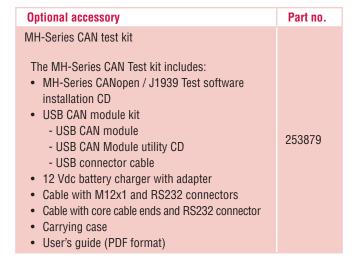

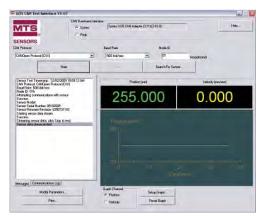

MH-Series CAN test kit software interface