

Note: See page 14 for a complete description of the above part number system.

Sold & Serviced By:  
  
 Toll Free Phone (877) SERV098  
 Toll Free Fax (877) SERV099  
[www.electromate.com](http://www.electromate.com)  
[sales@electromate.com](mailto:sales@electromate.com)

(E) - English Interface	(M) - Metric Interface
(LFT) - Left Facing Thread	(NPL) - Non Preloaded
(LH) - Left Hand	(PL) - Preloaded
(LT) - Low Thrust	(RFT) - Right Facing Thread
(HT) - High Thrust	(RH) - Right Hand

## Screw & Nut Specifications

Model Number	Nut Type	Diameter inches (mm)	Lead inches (mm)	Root Diameter inches (mm)	Ball Diameter inches (mm)	Number of Circuits	Static Load lbs (kgf)	Dynamic Load <sup>(1)</sup> lbs (kgf)
<b>RS062020</b> 0.625 inch dia. 0.200 inch lead	<i>Non-preloaded Ball (N1/N2)</i>	0.625 (15,87)	0.200 (5,08)	0.503 (12,77)	0.125 (3,17)	1	6,150 (2790)	800 (363)
	<i>Preloaded Ball (N3/N4)</i>						6,070 (2753)	720 (326)
	<i>Non-preloaded Turcite (N5/N6)</i>				800 (362)	100 (45)		
	<i>Preloaded Turcite (N7/N8)</i>				800 (362)	90 (41)		
<b>RS062100</b> 0.625 inch dia. 1.000 inch lead	<i>Non-preloaded Ball (N1/N2)</i>	0.625 (15,87)	1.000 (25,40)	0.505 (12,82)	0.125 (3,17)	2	2,425 (1100)	590 (267)
	<i>Preloaded Ball (N3/N4)</i>						2,390 (1084)	530 (240)
	<i>Non-preloaded Turcite (N5/N6)</i>				800 (362)	100 (45)		
	<i>Preloaded Turcite (N7/N8)</i>				800 (362)	90 (41)		

## Other Specifications

<b>Maximum Acceleration Rate</b>	Ball nut: 772 inches/sec <sup>2</sup> (19.6 m/sec <sup>2</sup> ) Turcite nut: 193 inches/sec <sup>2</sup> ( 4.9 m/sec <sup>2</sup> )
<b>Maximum Speed</b>	Ball nut: 3000 rpm Turcite nut: 1500 rpm
<b>Screw Material</b>	Right Hand Thread, Case Hardened Rc 58 Steel Rolled Ball Screw
<b>Screw Extensions</b>	303 Woodruff Keyways on Extensions from Support Housings
<b>Screw Maximum Length<sup>(2)</sup></b>	72 inches (1828 mm)
<b>Screw Weight</b>	0.92 lbs/ft (13,7 g/cm)
<b>Support Housings</b>	Steel with Black Oxide Finish, 45° Chamfer x .02 inch (0,50) all Straight Edges
<b>Support Housing Features</b>	Base or Face Mount with Integral Seals
<b>Nut Flanges</b>	Steel with Black Oxide Finish
<b>Nut Flange Features</b>	English or Metric Load Mounting Interface

### Footnotes:

(1) Load based upon 1 million inches (25 Km) of travel life. See page 35 for further travel life ratings.

(2) Maximum stock length (not the maximum thread length with bearing housings). See page 34 for maximum thread lengths for each configuration.

## Screw Specifications

Model Number	Nut Type	Screw Efficiency %	Lead Error inch/ft (mm/300 mm)	Backlash inches (mm)	Unidirectional Repeatability inches (mm)	Bidirectional Repeatability inches (mm)
<b>RS062020</b> 0.625 inch dia. 0.200 inch lead	<i>Non-preloaded</i> Ball (N1/N2)	90	< 0.003 (0,075)	< 0.008 (0,203)	+/- 0.0002 (0,0050)	+ 0.0002 to - 0.0082 (0,0050) (0,2082)
	<i>Preloaded</i> Ball (N3/N4)					+ 0.0002 to - 0.0002 (0,0050) (0,0050)
	<i>Non-preloaded</i> Turcite (N5/N6)	60	< 0.003 (0,075)	< 0.008 (0,203)	+/- 0.0002 (0,0050)	+ 0.0002 to - 0.0082 (0,0050) (0,2082)
	<i>Preloaded</i> Turcite (N7/N8)					+ 0.0002 to - 0.0002 (0,0050) (0,0050)
<b>RS062100</b> 0.625 inch dia. 1.000 inch lead	<i>Non-preloaded</i> Ball (N1/N2)	90	< 0.004 (0,099)	< 0.008 (0,203)	+/- 0.0002 (0,0050)	+ 0.0002 to - 0.0082 (0,0050) (0,2082)
	<i>Preloaded</i> Ball (N3/N4)					+ 0.0002 to - 0.0002 (0,0050) (0,0050)
	<i>Non-preloaded</i> Turcite (N5/N6)	60	< 0.004 (0,099)	< 0.008 (0,203)	+/- 0.0002 (0,0050)	+ 0.0002 to - 0.0082 (0,0050) (0,2082)
	<i>Preloaded</i> Turcite (N7/N8)					+ 0.0002 to - 0.0002 (0,0050) (0,0050)

## Assembly Specifications

Model Number	Nut Type	Breakaway Torque oz-in (N-m)				
		Simple-Simple	Fixed(LT)-Simple	Fixed(HT)-Simple	Rigid-Simple	Rigid-Rigid
<b>RS062020</b> 0.625 inch dia. 0.200 inch lead	<i>Non-preloaded</i> Ball (N1/N2)	< 8 (0,06)	< 10 (0,07)	< 20 (0,14)	< 20 (0,14)	< 30 (0,21)
	<i>Preloaded</i> Ball (N3/N4)	< 15 (0,11)	< 20 (0,14)	< 30 (0,21)	< 30 (0,21)	< 40 (0,28)
	<i>Non-preloaded</i> Turcite (N5/N6)	< 10 (0,07)	< 15 (0,11)	< 30 (0,21)	< 30 (0,21)	< 40 (0,28)
	<i>Preloaded</i> Turcite (N7/N8)	< 25 (0,18)	< 30 (0,21)	< 45 (0,32)	< 45 (0,32)	< 55 (0,39)
<b>RS062100</b> 0.625 inch dia. 1.000 inch lead	<i>Non-preloaded</i> Ball (N1/N2)	< 15 (0,11)	< 25 (0,18)	< 40 (0,28)	< 40 (0,28)	< 50 (0,35)
	<i>Preloaded</i> Ball (N3/N4)	< 30 (0,21)	< 40 (0,28)	< 55 (0,39)	< 55 (0,39)	< 65 (0,45)
	<i>Non-preloaded</i> Turcite (N5/N6)	< 25 (0,18)	< 35 (0,25)	< 50 (0,35)	< 50 (0,35)	< 60 (0,42)
	<i>Preloaded</i> Turcite (N7/N8)	< 50 (0,35)	< 60 (0,42)	< 75 (0,53)	< 75 (0,53)	< 85 (0,60)

Sold & Serviced By:

 **ELECTROMATE**

Toll Free Phone (877) SERV098

Toll Free Fax (877) SERV099



www.electromate.com

sales@electromate.com

Specifications Subject to Change Without Notice


## Support Housing Specifications

Support Housing Life millions of screw revolutions	Support Housing Thrust Load Capacity - (Axial)			
	Simple	Fixed (LT)	Fixed (HT)	Rigid
<b>Static</b>	1,370 (621)	1,725 (782)	3,105 (1408)	3,105 (1408)
<b>1</b>	1,370 (621)	1,725 (782)	2,875 (1304)	2,875 (1304)
<b>2</b>	1,215 (551)	1,530 (694)	2,195 (996)	2,195 (996)
<b>10</b>	710 (322)	895 (406)	1,295 (587)	1,295 (587)
<b>50</b>	410 (186)	525 (238)	790 (358)	790 (358)
<b>100</b>	330 (150)	415 (188)	630 (286)	630 (286)
<b>500</b>	195 (88)	240 (109)	365 (166)	365 (166)

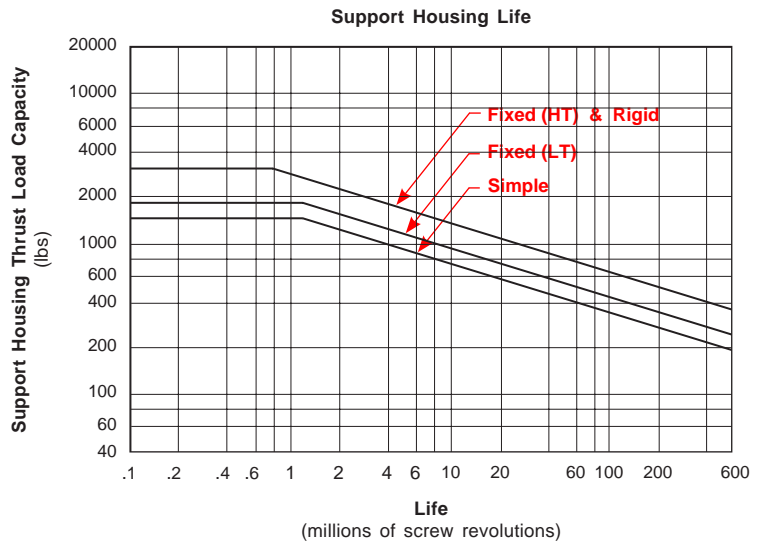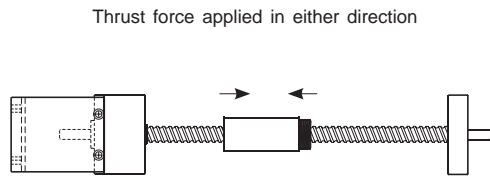


Note: Multiply screw revolutions by the screw lead in order to convert to inches (or mm) traveled by the nut.

## Available Configurations

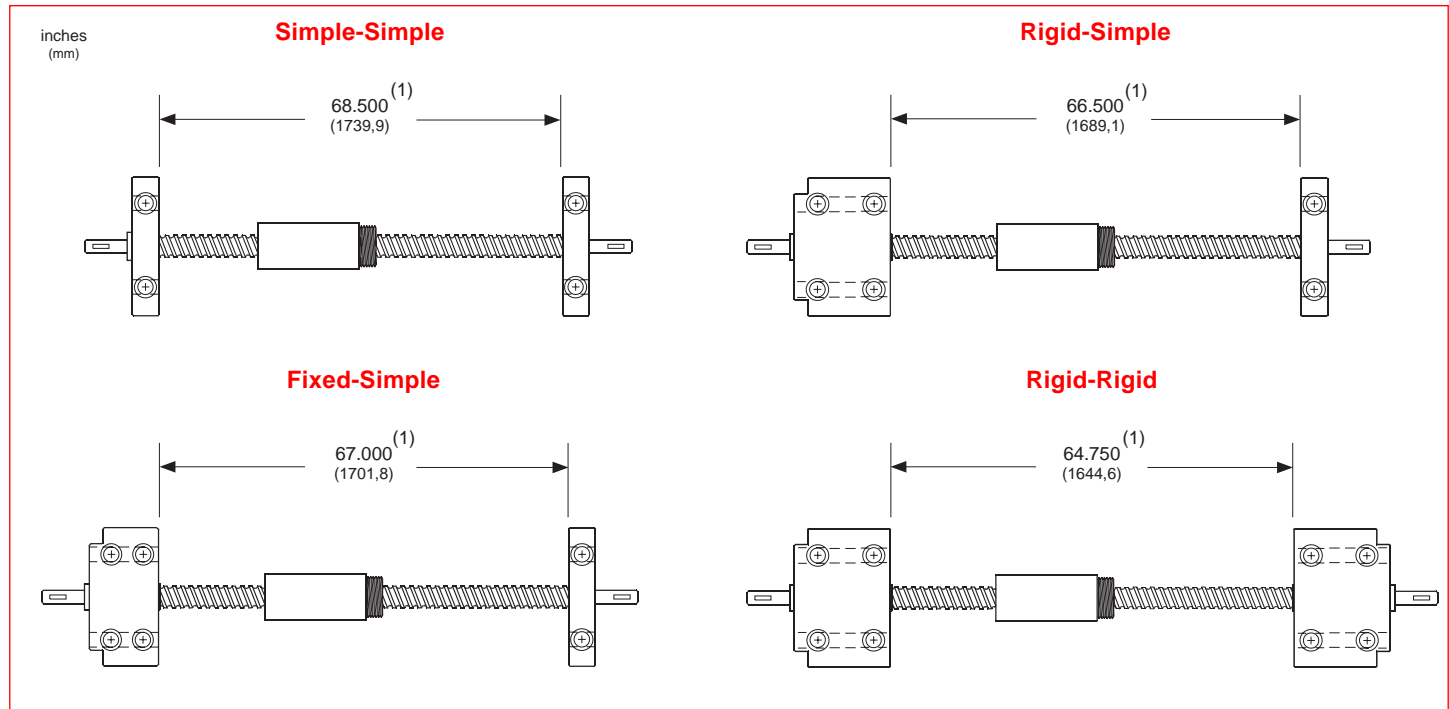

## Overall Length Diagram

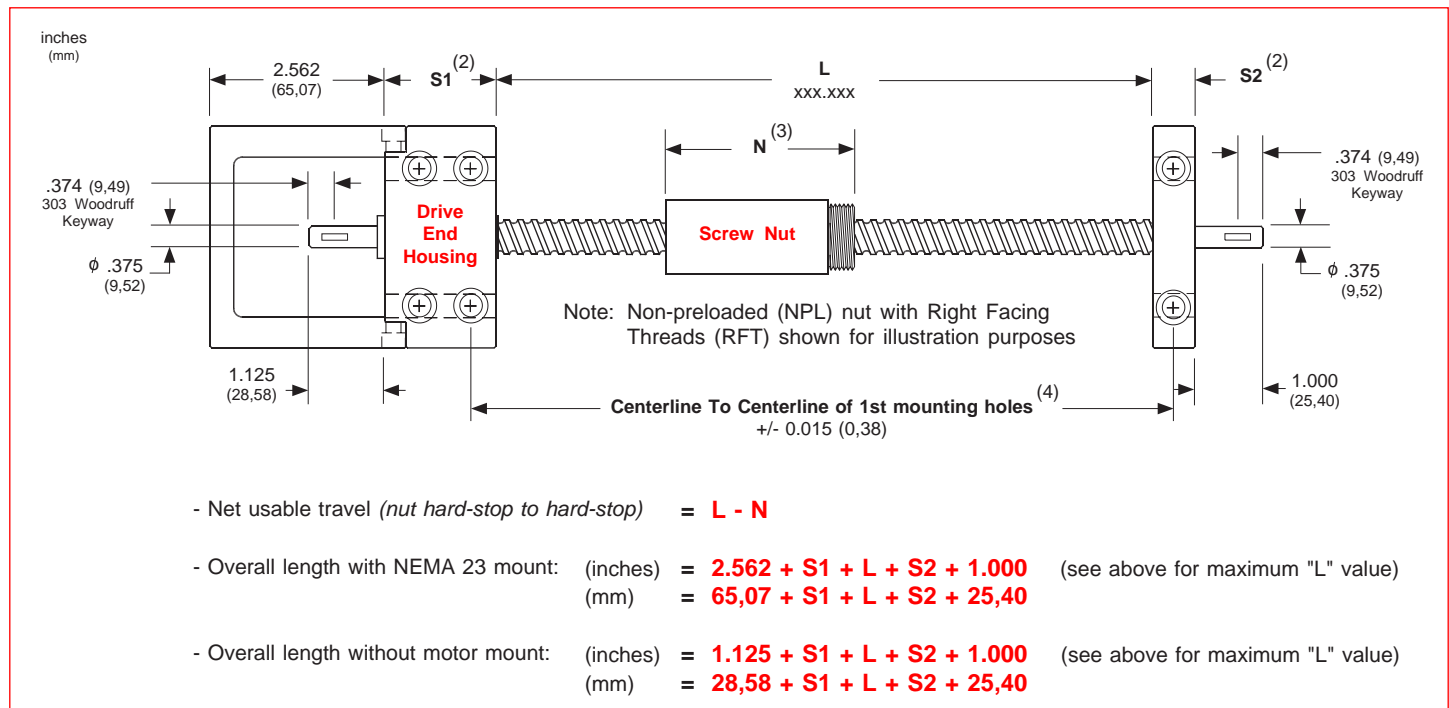


### Footnotes:


- (1) Maximum available standard screw thread length for the bearing support housing configuration shown.
- (2) Fixed-simple support configuration shown for reference. See page 37 for length values for simple, fixed, and rigid housings.
- (3) See page 36 for available nut styles. Refer to A1 & A2 values for the nut length. See page 96 for wiper kit lengths.
- (4) Tolerance shown is for base mounted support housings. Tolerance also applies to face mounted support housings.

## Performance Charts


### Simple-Simple

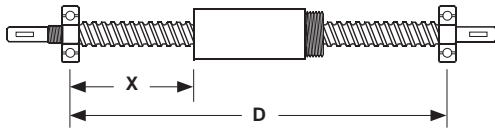

### Rigid-Simple

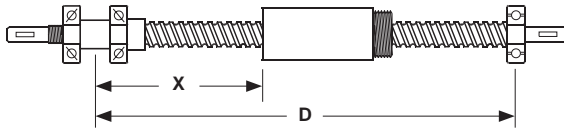


### Rigid-Rigid

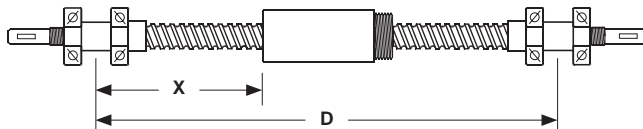

### Maximum Compression Load <sup>(1)</sup>


X inches (mm)	simple-simple		rigid-simple		rigid-rigid	
	lbs	(kgf)	lbs	(kgf)	lbs	(kgf)
20 (508)	1799	(816)	2425	(1100)	2425	(1100)
40 (1016)	450	(204)	900	(408)	1800	(816)
60 (1524)	200	(91)	400	(181)	800	(363)

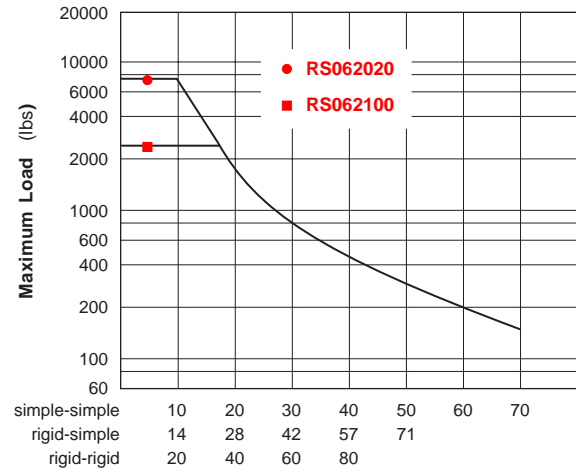

Maximum "X" distance between bearing support and Load (inches)

### Maximum Speed <sup>(1)</sup>


D inches (mm)	simple-simple		rigid-simple		rigid-rigid	
	rpm	rpm	rpm	rpm	rpm	rpm
27 (686)	2940	3000	3000	3000	3000	3000
40 (1016)	1340	1970	1970	1970	1970	1970
60 (1524)	595	870	870	870	1325	1325
70 (1778)	435	640	640	640	970	970

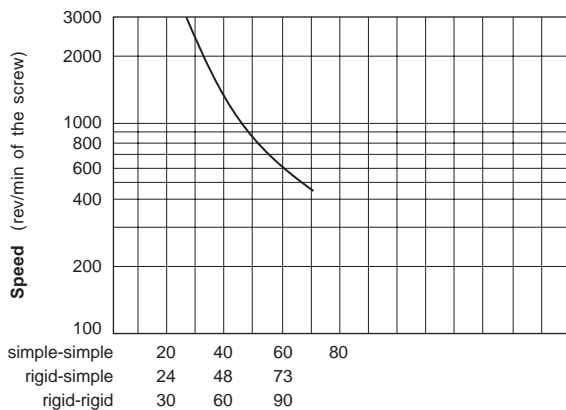

Maximum "D" distance between bearing supports (inches)

### Screw Travel Life <sup>(2)</sup>


Life millions of inches (km)	062020		062100		Turcite Nut	
	lbs	(kgf)	lbs	(kgf)	lbs	(kgf)
1 (25)	800	(363)	590	(268)	100	(45)
2 (50)	640	(290)	480	(218)	80	(36)
50 (1270)	230	(104)	170	(77)	29	(13)
100 (2540)	190	(86)	140	(64)	24	(11)

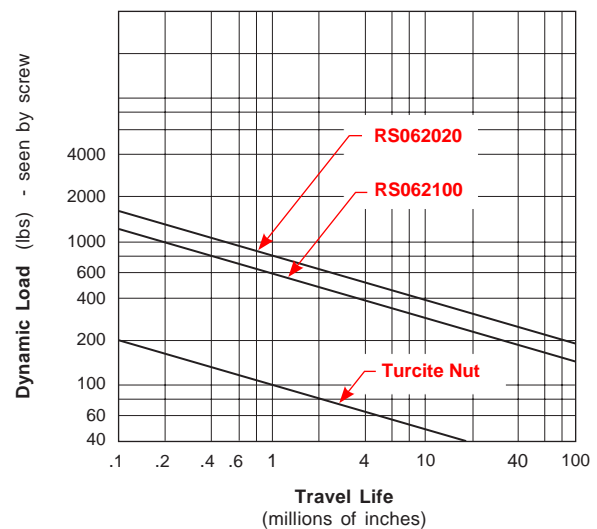


### Footnotes:

- (1) Refer to the simple-simple support lengths for fixed-simple configurations. A fixed housing performs like a simple housing for critical speed and compression load specifications. Maximum speeds may not be reached using a Turcite nut due to system friction.
- (2) Multiply life value from chart (or graph) by 0.90 to obtain the life for a preloaded ball nut.

## Nut Dimensions

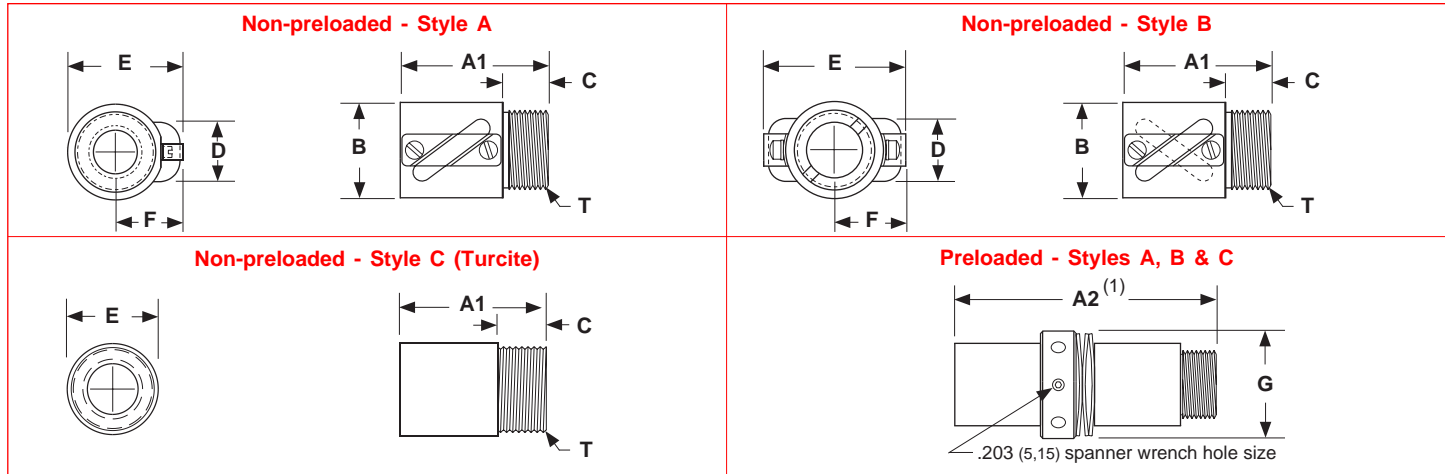

## Nut Flange Dimensions

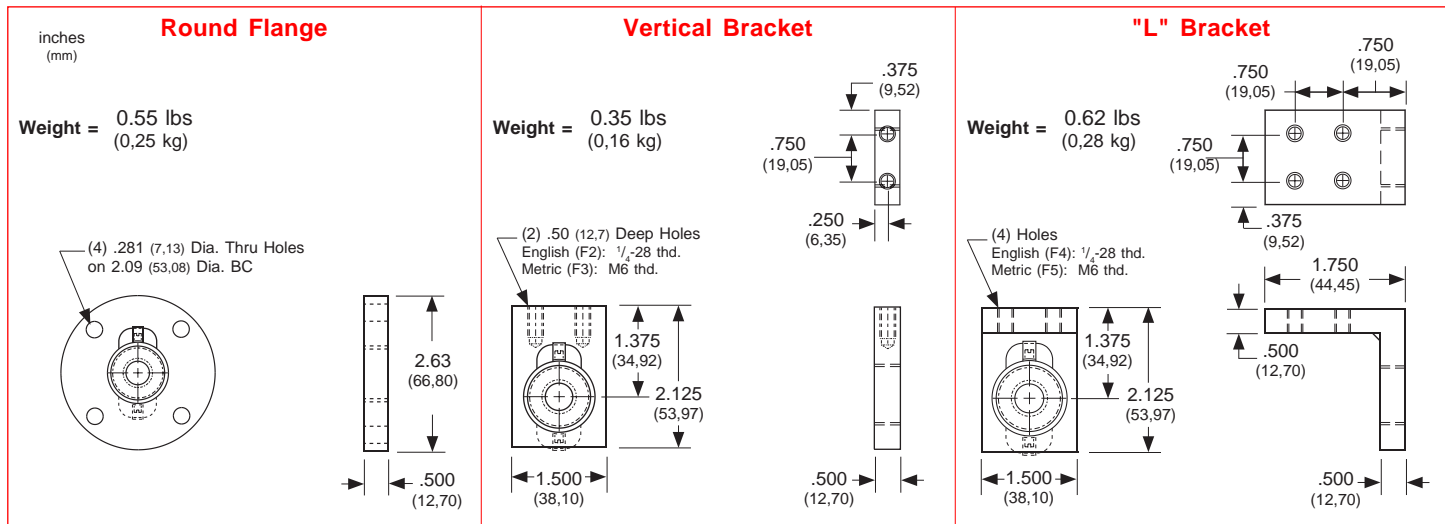

Model Number	Nut Style	Nut Dimensions									Nut Weight <sup>(3)</sup> lbs (kg)
		inches (mm)									
		A1	A2 <sup>(1)</sup>	B	C	D	E	F	T - "V" Threads <sup>(2)</sup>	G	
RS062020	A	1.720 (43,69)	3.750 (95,25)	1.130 (28,70)	0.505 (12,83)	0.787 (19,99)	1.360 (34,54)	0.800 (20,32)	15/16 - 16 UN-2A (23,81 - 16 UN-2A)	1.420 (36,07)	0.50 (0,22)
RS062100	B	1.720 (43,69)	3.750 (95,25)	1.125 (28,57)	0.500 (12,70)	0.760 (19,30)	1.654 (42,01)	0.827 (21,00)	15/16 - 16 UN-2A (23,81 - 16 UN-2A)	1.420 (36,07)	0.28 (0,13)
RS062020	C	1.130 (28,70)	2.850 (72,39)	n/a	0.505 (12,83)	n/a	1.000 (25,40)	n/a	15/16 - 16 UN-2A (23,81 - 16 UN-2A)	n/a	0.20 (0,09)
RS062100	C	1.130 (28,70)	2.850 (72,39)	n/a	0.500 (12,70)	n/a	1.000 (25,40)	n/a	15/16 - 16 UN-2A (23,81 - 16 UN-2A)	n/a	0.20 (0,09)

### Footnotes:

- (1) This is the length for a preloaded nut. Preloaded nut consists of two (2) non-preloaded nuts with a locking spanner nut, and belville springs.
- (2) All flange threads are internal (Type 2B) to match the external nut threads.
- (3) Weight of the non-preloaded nut. Multiply value by 2.1 to obtain the weight for the preloaded nut assembly.

## Support Housing Dimensions

**Simple**

Weight = 1.1 lbs (0,50 kg)

Drive End      non-Drive End

**Fixed**

Weight = 2.7 lbs (1,22 kg)

**Rigid**

Weight = 3.9 lbs (1,77 kg)

**NEMA 23 Motor Mount**

Weight = 0.9 lbs (0,41 kg)

(4) Holes on 2.625 (66,67) BC Dia.  
English (M02): #10-24 thd.  
Metric (M03): M5 thd.

1.502 (38,15) Pilot Dia. TYP

(2) .221 (5,61) Dia.Thru Holes, .344 (8,73) Dia. C' Bored x .125 (3,17) Deep, both sides

**NEMA 34 Motor Mount**

Weight = 1.4 lbs (0,64 kg)

(4) Holes on 3.875 (98,42) BC Dia.  
English (M04): #10-24 thd.  
Metric (M05): M5 thd.

2.877 (73,07) Pilot Dia. TYP

(2) .221 (5,61) Dia.Thru Holes, .344 (8,73) Dia. C' Bored x .125 (3,17) Deep, both sides