

RCS2-RGD5C

ROBO Cylinder Rod Type with Single Guide ø37mm Diameter 200V Servo Motor
Built-In Model

■ Configuration: **RCS2** — **RGD5C** — [] — [] — [] — [] — [] — [] — []

Series — Type — Encoder — Motor — Lead — Stroke — Compatible Controllers — Cable Length — Option

I : Incremental
A : Absolute

60 : 60W Servo Motor
100 : 100W Servo Motor

16 : 16mm
8 : 8mm
4 : 4mm

50 : 50mm
300 : 300mm (50mm pitch increments)


T1 : XSEL-J/K
T2 : SCON
SSEL
XSEL-P/Q

N : None
P : 1m
S : 3m
M : 5m
X [] : Custom
R [] : Robot cable

See Options below

* See page Pre-35 for an explanation of the naming convention.

For High Acceleration/Deceleration (*1)

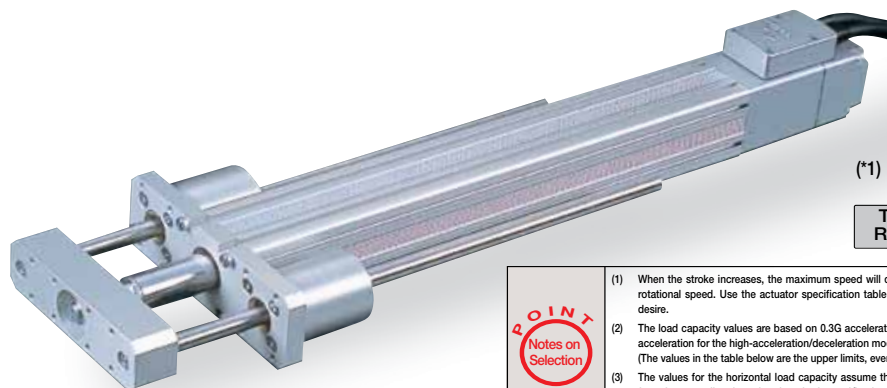

(*1) Except all 60W models and 100W 4mm lead models

Technical References P. A-5

- POINT**
Notes on Selection
- (1) When the stroke increases, the maximum speed will drop to prevent the ball screw from reaching the critical rotational speed. Use the actuator specification table below to check the maximum speed at the stroke you desire.
 - (2) The load capacity values are based on 0.3G acceleration for the standard model (0.2G for 4mm-lead), and 1G acceleration for the high-acceleration/deceleration models (4mm-lead excluded). (The values in the table below are the upper limits, even if the acceleration/deceleration is decreased.)
 - (3) The values for the horizontal load capacity assume the use of an external guide, so that there is no external force from any direction other than the forward/backward direction of the rod. See the technical resources (page A-83) for the allowable weight using the supplied guide alone.

Actuator Specifications					
■ Lead and Load Capacity					
Model	Motor Output (W)	Lead (mm)	Max. Load Capacity		Stroke (mm)
			Horizontal (kg)	Vertical (kg)	
RCS2-RGD5C-①-60-16-②-③-④-⑤	60	16	12.0	1.3	50 ~ 300 (50mm increments)
RCS2-RGD5C-①-60-8-②-③-④-⑤		8	25.0	4.3	
RCS2-RGD5C-①-60-4-②-③-④-⑤		4	50.0	10.8	
RCS2-RGD5C-①-100-16-②-③-④-⑤	100	16	15.0	2.8	50 ~ 300 (50mm increments)
RCS2-RGD5C-①-100-8-②-③-④-⑤		8	30.0	8.3	
RCS2-RGD5C-①-100-4-②-③-④-⑤		4	60.0	17.3	

Legend: ① Encoder ② Stroke ③ Compatible controller ④ Cable length ⑤ Options

■ Stroke and Maximum Speed			
Lead	Stroke	50 ~ 250 (50mm increments)	300 (mm)
	16	800	755
8	400	377	
4	200	188	

(Unit: mm/s)

Encoder & Stroke List				
② Stroke (mm)	Standard Price			
	① Encoder			
	Incremental		Absolute	
	Motor Output (W)		Motor Output (W)	
	60W	100W	60W	100W
50	-	-	-	-
100	-	-	-	-
150	-	-	-	-
200	-	-	-	-
250	-	-	-	-
300	-	-	-	-

④ Cable List		
Type	Cable Symbol	Standard Price
Standard	P (1m)	-
	S (3m)	-
	M (5m)	-
Special Lengths	X06 (6m) ~ X10 (10m)	-
	X11 (11m) ~ X15 (15m)	-
	X16 (16m) ~ X20 (20m)	-
	R01 (1m) ~ R03 (3m)	-
Robot Cable	R04 (4m) ~ R05 (5m)	-
	R06 (6m) ~ R10 (10m)	-
	R11 (11m) ~ R15 (15m)	-
	R16 (16m) ~ R20 (20m)	-

* See page A-39 for cables for maintenance.

⑤ Option List			
Name	Option Code	See Page	Standard Price
Connector cable exit direction	A2	→ A-25	-
Brake	B	→ A-25	-
Foot bracket	FT	→ A-29	-
High-acceleration/deceleration (*1)	HA	→ A-32	-

(*1) The high-acceleration/deceleration option is not available for all 60W models and 100W model with 4mm lead.

Actuator Specifications	
Item	Description
Drive System	Ball screw ø12mm C10 grade
Positioning Repeatability	±0.02mm
Lost Motion	0.1mm or less
Guide	Double guide (guide rod diameter ø12, Ball bush type)
Rod Diameter	ø30mm
Non-rotating accuracy of rod	±0.08 deg
Ambient Operating Temp./Humidity	0 ~ 40°C, 85% RH or less (non-condensing)

259


RCS2-RGD5C

Dimensions

For Special Orders P. A-9

*The RGD5C is not available in reversed-home configuration, due to its construction.

- *1 The motor-encoder cable is connected here. See page A-39 for details on cables.
- *2 When homing, the rod moves to the ME; therefore, please watch for any interference with the surrounding objects.
ME: Mechanical end SE: Stroke end

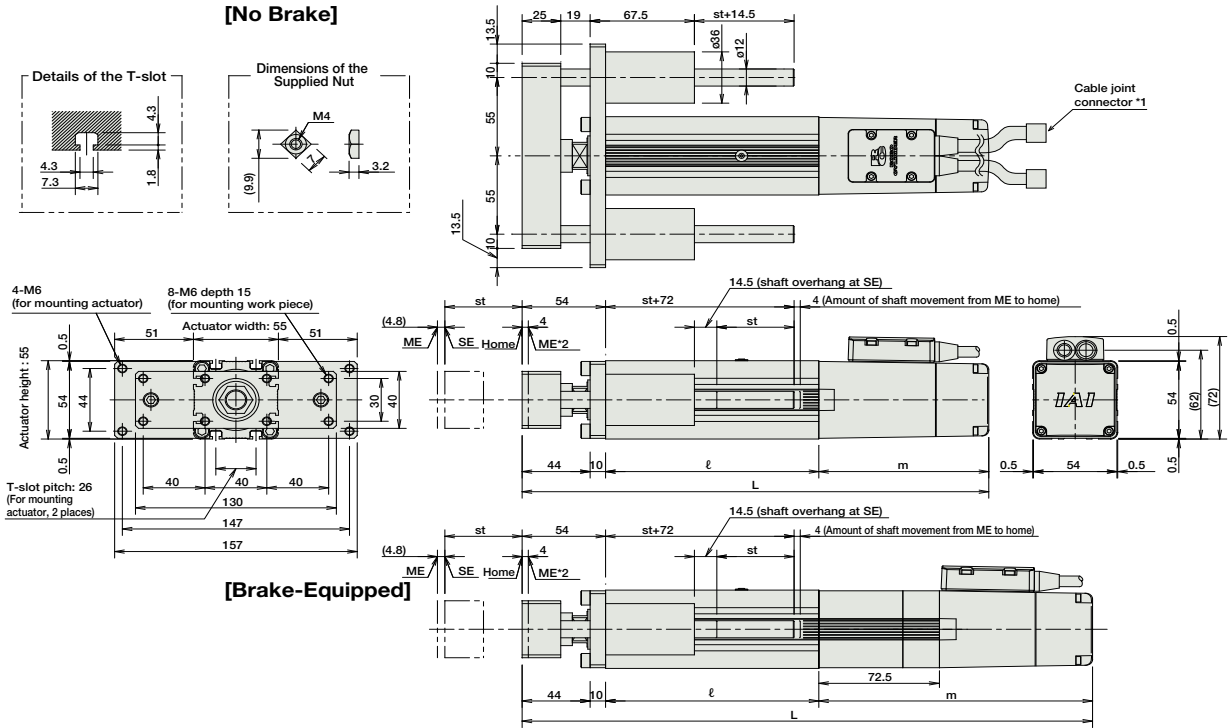

■ Dimensions/Weight by Stroke

RCS2-RGD5C (without brake)

Stroke	50	100	150	200	250	300		
L	60W	284	334	384	434	484	524	
	100W	302	352	402	452	502	552	
ℓ	60W	138	188	238	288	338	388	
	100W	92						110
m	60W	92						110
	100W	110						110
Weight (kg)	2.7	3.0	3.4	3.8	4.2	5.5		

RCS2-RGD5C (with brake)

Stroke	50	100	150	200	250	300		
L	60W	356.5	406.5	456.5	506.5	556.5	606.5	
	100W	374.5	424.5	474.5	524.5	574.5	624.5	
ℓ	60W	138	188	238	288	338	388	
	100W	164.5						182.5
m	60W	164.5						182.5
	100W	182.5						182.5
Weight (kg)	3.0	3.3	3.7	4.1	4.5	5.8		

③ Compatible Controllers

The RCS2 series actuators can operate with the controllers below. Select the controller according to your usage.

Name	External View	Model	Description	Max. Positioning Points	Input Voltage	Power Supply Capacity	Standard Price	See Page
Positioner Mode		SCON-C-60①-NP-2-③ SCON-C-100①②-NP-2-③	Positioning is possible for up to 512 points	512 points	Single-Phase AC 100V Single-Phase AC 200V Three-phase AC 200V (XSEL-P/Q only)	360VA max. * When operating a 150W single-axis model	-	→ P547
Solenoid Valve Mode			Operable with the same controls as the solenoid valve.	7 points				
Serial Communication Type			Dedicated to serial communication	64 points				
Pulse Train Input Control Type			Dedicated to Pulse Train Input	(-)				
Program Control 1-2 Axes Type		SSEL-C-1-60①-NP-2-③ SSEL-C-1-100①②-NP-2-③	Programmed operation is possible Operation is possible on up to 2 axes	20000 points			-	→ P577
Program Control 1-6 Axes Type		XSEL-④-1-60①-N1-EEE-2-⑤ XSEL-④-1-100①②-N1-EEE-2-⑤	Programmed operation is possible Operation is possible on up to 6 axes	20000 points			-	→ P587

* For SSEL and XSEL, only applicable to the single-axis model.
 * ① is a placeholder for the encoder type (I: incremental / A: absolute).
 * ② is a placeholder for the code "HA" if the high-acceleration/deceleration option is specified.
 * ③ is a placeholder for the power supply voltage (1: 100V, 2: single-phase 200V).
 * ④ is a placeholder for the XSEL type name ("J", "K", "P", "Q").
 * ⑤ is a placeholder for the power supply voltage (1: 100V, 2: single-phase 200V, or 3: three-phase 200V).



RCS2-RGD5C **260**

- Slider Type
- Mini
- Standard
- Controllers Integrated
- Rod Type
- Mini
- Standard
- Controllers Integrated
- Table/Arm /Flat Type
- Mini
- Standard
- Gripper/ Rotary Type
- Linear Servo Type
- Cleanroom Type
- Splash Proof
- Controllers
- PMEC /AMEC
- PSEP /ASEP
- ROBO NET
- ERC2
- PCON
- ACON
- SCON
- PSEL
- ASEL
- SSEL
- XSEL
- Pulse Motor
- Servo Motor (24V)
- Servo Motor (200V)
- Linear Servo Motor