KOLLMORGEN GOLDLINE® DDR

www.DanaherMotion.com









New Name, Established Brands

Danaher Motion's wide range of motion control systems and components offer customers an unprecedented choice in selecting the right solution to match their particular application requirements. Our product innovations have been improving the efficiency and productivity of complex manufacturing operations for over 60 years through trusted brand names such as Dover, Kollmorgen, Pacific Scientific, Portescap and Thomson in industries as diverse as semiconductor, aerospace and defense, mobile-off-highway, packaging, medical and robotics.

In addition, Danaher Motion, through Motion Engineering (MEI), offers powerful integrated motion control solutions with its industry-leading, multi-axis motion platforms and SynqNet" communications network for ultra-reliable machine performance. From software and controller, through the communications network to drives and I/O devices, to mechanical and electro-mechanical products, Danaher Motion differentiates itself in the marketplace by designing standard and custom solutions to satisfy the most demanding application requirements.

Our growing family of leading motion control products and application expertise tells only half the story. With a worldwide service and support infrastructure, our field service engineers and support teams are available to assist whenever they are needed. It is part of Danaher Corporation's unrelenting focus on its customer. That's why more and more design engineers are turning to Danaher Motion to meet their motion control requirements.

Danaher Motion Values

Application Expertise

Broad & Innovative Motion Control Products and Systems

Customer Focus

Customizable Products and Services

Motion Control Pioneers with Global Staying Power

Operational Excellence

Continuous Improvement – It's the Danaher Way

At Danaher, we are passionate about continually improving our operations to bring increasing value to our customers. The Danaher Business System (DBS) helps us improve the efficiency of our manufacturing and product development processes. DBS is a team-based approach based on the principles of Kaizen that lets us continuously and aggressively eliminate waste in every aspect of our business operations. The DBS focuses our entire organization on achieving breakthrough results that create competitive advantage in quality, delivery and performance — advantages that we pass on to you, our customer.

Whatever your motion control requirements may be, Danaher Motion has a solution that is right for you. Our unsurpassed product selection and service means faster time to market, higher reliability and increased productivity. Let the experts at Danaher Motion put a world of motion control solutions at your fingertips.

Your World in Motion. Control It.







What is direct drive? Very simply it is the direct coupling of the torque motor (such as the Kollmorgen GOLDLINE® DDR motor) to the driven load. This configuration results in a very stiff coupling to the load, thus, eliminating problems associated with belts and gearboxes.

The DDR Benefits:

- ZERO maintenance
- No belts/pulleys, no belt adjustment/replacement
- No gearboxes, no lubrication required
- Zero backlash and compliance
- Flat, compact drive solution
- One part number for mechanical drive motor (clean mechanical assembly)
- Very quiet
- Hollow shaft

This technology has been refined into the Kollmorgen **GOLD**LINE DDR product line for easy installation and use and is available at short leadtimes.

Kollmorgen: The DDR Birthplace

In the early 1950's Kollmorgen Inland Motor, in cooperation with MIT, developed the original torque motor. This brush DC motor was used on stabilized platforms for inertial guidance systems. The large diameter, thin ring design was ideal for this light weight, high torque application. Over the years Kollmorgen has designed torque motors for applications from missiles and tank turrets to machine tools, injection molding machines, and semiconductor processing machines. Our product range covers from oz-in of torque to over 20,000 N-m of torque and over 10 feet in diameter.

Kollmorgen's 50 years of electromagnetic and electromechanical design expertise is packed into the Kollmorgen brushless **GOLD**LINE DDR product line. We achieve very high torque density through both large diameter, short length, and high number of magnetic poles. Couple this with a very high resolution feedback device (up to 2,097,152 counts per revolution) and the Kollmorgen **GOLD**LINE DDR becomes a high performance, zero maintenance, servo solution.

The Kollmorgen **GOLD**LINE DDR is the latest in a series of product innovations from the worldwide leader in DDR motor products....Kollmorgen.



Kollmorgen Large Diameter Torque Motors




Kollmorgen RBE Frameless Torque Motors



Kollmorgen GOLDLINE DDR Housed Torque Motors

Application Problem




Solution



Benefits

Belt/pulley


- Zero maintenance
- No belt adjustment/replacement
- No belt compliance
- Better servo performance
- Clean mechanical assembly
- Flat profile
- Quiet
- Reduced number of parts
- Hollow shaft






Gearmotors/right angle/in-line


- Zero maintenance
- No gearbox lubrication
- No gearbox backlash
- Better servo performance
- Flat Profile
- Quiet
- Hollow shaft





Large Vertical Wheel

- Zero maintenance
- No belt adjustment/replacement
- No belt compliance
- Better servo performance
- Faster index times
- Clean mechanical assembly
- Quiet
- Reduced number of parts
- Hollow shaft






Rotary Indexer

- Zero maintenance
- No gearbox lubrication
- No gearbox backlash
- Better servo performance
- Quiet
- Reduced number of parts
- Hollow shaft



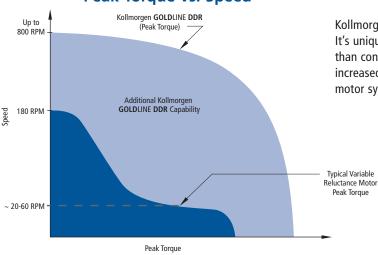

Kollmorgen's **GOLD**LINE **DDR** is designed for very high torque density. It's unique electromagnetic design provides much more speed/torque area than conventional variable reluctance motors. This curve shows the increased speed and torque available from a Kollmorgen **GOLD**LINE **DDR** motor system. This results in faster indexing times and higher throughput.

SERVOSTAR®: The Common Drive Design Solution

One drive.... Many types of motors....


The Kollmorgen SERVOSTAR line of digital amplifiers provides you with the ultimate in flexibility and simplicity. Now, you have the freedom to design the best solution, whether rotary or linear, for your specific application. No need to match the motor to the amplifier. No custom electronics required. No hassles with learning, stocking, and supporting several drive types. Get outstanding system performance while saving time and money.


Kollmorgen offers the broadest range of motor technologies in the industry and a common drive platform that makes using the best electromechanical solution easy for you. Use SERVOSTAR amplifiers with the Kollmorgen GOLDLINE® DDR, PLATINUM® DDL linear, RBE frameless direct drive or the industry-standard Kollmorgen GOLDLINE® XT or B series rotary servos.

The common drive design solution will make your life a little easier. Only from Kollmorgen.





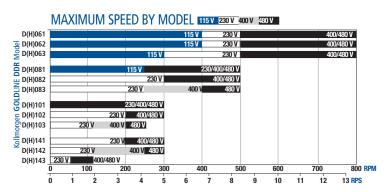

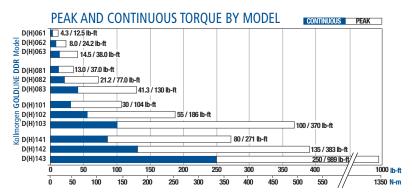


Kollmorgen GOLDLINE® DDR Series Motors

Features	Benefits
Elimination of gearbox	Zero maintenance, smoother velocity, higher bandwidth, quiet (reduced, audible noise)
Elimination of belts	Zero maintenance, higher bandwidth
High torque density permanent magnet design provides more speed and torque vs variable reluctance motors	Faster indexing, lower heat generation
Large through bore	Run process fluids, pneumatics, and electrical through center of motor
Speeds up to 800 rpm	More than just an indexer, DDR can be used for continuous velocity applications
High Position Resolution (up to 2,097,152 counts per revolution)	Repeatability down to ±0.62 arc.sec
Wide range of size and torque	Cover any DDR application
Peak torque up to 990 lb-ft	Rapid indexing of large inertia loads
Axial loading up to 12,700 lbs	Can carry heavy loads for indexing
Moment loading up to 472 lb-ft	Operate motor with significant offset loads
Mix/match motors/drives	No serial number matching of motor/drive

Recommended Motor/Drive Systems

ServoDrive	Standard Motor Systems	Cable Set (Resolver)	Cable Set (Sine Encoder)
SERVOSTAR CD 6 amp	D061, D062, D063 D081, D082, D083, D101	CS-SS-RHAHE-xx	CS-SS-S3HA1HE-xx
SERVOSTAR CD 10 amp	D102, D103		
SERVOSTAR 600 10 amp	DH061, DH062, DH063, DH081, DH082, DH083, DH101, DH102	CS-SS-RHG1HE-xx	CS-SS-S3HG1HE-xx
SERVOSTAR 600 14 amp	D141, D142, DH103, DH141, DH142	CS-SS-RHG2HE-xx	CS-SS-S3HG2HE-xx
SERVOSTAR 600 20 amp	D143, DH143		


MOTOR OUTSIDE / INSIDE DIAMETERS BY MODEL



115 and 230 VAC

System Performance:		Symbols	Units	D061A/D061M	D062A/D062M	D063A/D063M
Peak Torque		Тр	lb-ft	12.5	24.2	38.0
		т.	N-m	16.9	32.8	51.5
Continuous (1)	Sine Encoder	Tc	lb-ft	3.9	7.2	13.1
		-	N-m	5.3	9.8	17.7
Torque 40°C	Resolver	Tc	lb-ft	4.3	8.0	14.5
			N-m	5.8	10.8	19.7
Max. Operating Spee	d	N max	rpm	500/400	500/400	500/300
230/115 V Single Phas	se		rps	8.3/6.7	8.3/6.7	8.3/5.0
Sine Encoder	Resolution	_	counts/rev	2,097,152	2,097,152	2,097,152
	Repeatability	-	arc/sec	±0.62	±0.62	±0.62
System	Accuracy		arc/sec	±26	±26	±26
Resolver	Resolution (3)	-	counts/rev	524,288	524,288	524,288
	Repeatability	-	arc/sec	±2.48	±2.48	±2.48
System	Accuracy		arc/sec	±270	±270	±270
Mechanical:						
Weight		Wt	lb	20.8	25.0	30.5
J			kg	9.4	11.3	13.8
Rotor Inertia		Jm	lb-ft-sec ²	0.0045	0.0052	0.0064
			kg-m²	0.0061	0.0071	0.0086
Static Friction adder		Tf	lb-ft	1.8	1.8	1.8
for sealed units			N-m	2.4	2.4	2.4
Max. Dynamic Axial (Compression	-	lbf	4,500	4,500	4,500
Load (See page 20 fo	r details)		kg	2,040	2,040	2,040

SYSTEM: D061A/D061M with SERVOSTAR CR06/CB06




Notes:


- for 25°C ambient , multiply Tc by 1.06.
 Curves for 230V applicable to single or three phase input power.
- Drive resolver-to-digital converter and encoder equivalent output limits max resolution to 524,288 counts per rev up to 187 rpm, and
- 131,072 counts per rev above 187 rpm.

 As with any Kollmorgen product, if there are any questions regarding this information or application of this product, please consult Customer Support and we will be glad to assist you.

SYSTEM: D062A/D062M with SERVOSTAR CR06/CB06



SYSTEM: D063A/D063M with SERVOSTAR CR06/CB06




DANAHER MOTION is a registered trademark of Danaher Corporation. Danaher Motion makes every attempt to ensure accuracy reliables to the post table table to the post table table to the post table table table to the post table tab

115 and 230 VAC

System Performance:		Symbols	Units	D081A/D081M	D082A/D082M	D083A/D083M
Peak Torque		Тр	lb-ft N-m	32.0 43.4	68.0 92.2	118 160
Continuous (1)	Sine Encoder	Tc	lb-ft N-m	11.7 15.9	19.1 25.9	37.2 50.4
Torque 40°C	Resolver	Tc	lb-ft N-m	13.0 17.6	21.2 28.7	41.3 56.0
Max. Operating Speed 230/115 V Single Phase		N max	rpm rps	500/250 8.3/4.2	300/NA 5.0/NA	250/NA 4.2/NA
Sine Encoder System	Sine Encoder Resolution		counts/rev arc/sec	2,097,152 ±0.62	2,097,152 ±0.62	2,097,152 ±0.62
Resolver	Accuracy Resolution (3)	_	arc/sec counts/rev	±26 786,432	±26 786,432	±26 786,432
System	Repeatability Accuracy	-	arc/sec arc/sec	± 1.65 ± 140	± 1.65 ± 140	±1.65 ±140
Mechanical:						
Weight		Wt	lb kg	39.5 17.9	47.5 21.5	63.6 28.8
Rotor Inertia		Jm	lb-ft-sec² kg-m²	0.0106 0.0144	0.0143 0.0194	0.0222 0.0301
Static Friction adder for sealed units		Tf	lb-ft N-m	2.0 2.7	2.0 2.7	2.0 2.7
Max. Dynamic Axial Co Load (See page 20 for	•	-	lbf kg	7,400 3,360	7,400 3,360	7,400 3,360


SYSTEM: D081A/D081M with SERVOSTAR CR06/CB06




Notes:

- ① For 25°C ambient, multiply Tc by 1.06. © Curves for 230V applicable to single or three phase input power.
- ® Drive resolver-to-digital converter and encoder equivalent output limits
- max resolution to 786,532 counts per rev up to 125 rpm, and 196,608 counts per rev above 125 rpm.
- As with any Kollmorgen product, if there are any questions regarding this information or application of this product, please consult Customer Support and we will be glad to assist you.

SYSTEM: D082A/D082M with SERVOSTAR CR06/CB06




SYSTEM: D083A/D083M with SERVOSTAR CR06/CB06



230 VAC

System Performance:		Symbols	Units	D101A/D101M	D102A/D102M	D103A/D103M
Peak Torque		Тр	lb-ft	95.0	155	225
			N-m	129	210	305
	Sine Encoder	Tc	lb-ft	25.5	46.8	85.0
Continuous (1)	Sine Encoder		N-m	34.6	63.4	115.3
Torque 40°C	Resolver	Tc	lb-ft	30.0	55.0	100
	Resolver		N-m	40.7	74.6	136
Max. Operating Spec	ed 230V	N max	rpm	300	200	120
			rps	5.0	3.3	2.0
Sine Encoder	Resolution	-	counts/rev	2,097,152	2,097,152	2,097,152
	Repeatability	-	arc/sec	±0.62	±0.62	±0.62
System	Accuracy		arc/sec	±26	±26	±26
Resolver	Resolution (3)	-	counts/rev	1,048,576	1,048,576	1,048,576
	Repeatability	-	arc/sec	±1.24	±1.24	±1.24
System	Accuracy		arc/sec	±135	±135	±135
Mechanical:						
Weight		Wt	lb	69.5	96.5	134
			kg	31.5	43.8	60.8
Rotor Inertia		Jm	lb-ft-sec ²	0.0511	0.0732	0.129
			kg-m²	0.0693	0.0992	0.175
Static Friction adder		Tf	lb-ft	2.6	2.6	2.6
for sealed units			N-m	3.5	3.5	3.5
Max. Dynamic Axial	Compression	-	lbf	11,700	11,700	11,700
Load (See page 20 fo	or details)		kg	5,300	5,300	5,300

SYSTEM: D101A/D101M with SERVOSTAR CR10/CB10




Note:


- ① For 25°C ambient, multiply Tc by 1.06.
- Curves for D101, 230V applicable to single or three phase input power.
 Curves for D102 and D103, 230V require three phase input power.
- ® Drive resolver-to-digital converter and encoder equivalent output limits max resolution to 1,048,576 counts per rev up to 93 rpm, and 262.144 counts per rev above 94 rpm.
- 262,144 counts per rev above 94 rpm.

 As with any Kollmorgen product, if there are any questions regarding this information or application of this product, please consult Customer Support and we will be glad to assist you.

SYSTEM: D102A/D102M with SERVOSTAR CR10/CB10



SYSTEM: D103A/D103M with SERVOSTAR CR10/CB10




DANAHER MOTION is a registered trademark of Danaher Corporation. Danaher Motion makes every attempt to ensure accuracy reliables to the post table table to the post table table to the post table table table to the post table tab

230 VAC

System Performance:		Symbols	Units	D141M	D142M	D143M
Peak Torque		Тр	lb-ft	271	383	989
			N-m	367	519	1341
Continuous (1)	Sine Encoder	Tc	lb-ft	80	135	250
Torque 40°C			N-m	108	183	339
Max. Operating Speed		N max	rpm	200	120	60
230 V 3 Phase			rps	3.3	2.0	1.0
Sine Encoder	Resolution	-	counts/rev	1,048,576	1,048,576	1,048,576
	Repeatability	-	arc/sec	±1.24	±1.24	±1.24
System	Accuracy	-	arc/sec	±27	±27	±27
Mechanical:						
Weight		Wt	lb	131	191	323
			kg	59.4	86.6	146
Rotor Inertia		Jm	lb-ft-sec ²	.120	.202	.400
			kg-m²	.163	.274	.542
Static Friction adder		Tf	lb-ft	2.6	2.6	2.6
for sealed units			N-m	3.5	3.5	3.5
Max. Dynamic Axial Co	Max. Dynamic Axial Compression		lbf	12,700	12,700	12,700
Load (See page 20 for	details)		kg	5,760	5,760	5,760


SYSTEM: D141M with SERVOSTAR S614




Notes:

- ① For 25°C ambient, multiply by 1.06.
- All curves assume three phase input power to SERVOSTAR 600.
- As with any Kollmorgen product, if there are any questions regarding this information or application of this product, please consult Customer Support and we will be glad to assist you.

SYSTEM: D142M with SERVOSTAR S614




SYSTEM: D143M with SERVOSTAR S620




System Performance:		Symbols	Units	DH061A/DH061M	DH062A/DH062M	DH063A/DH063M
Peak Torque		Тр	lb-ft	12.5	24.2	47.5
			N-m	16.9	32.8	64.4
	Sine Encoder	Tc	lb-ft	3.9	7.2	13.1
Continuous (1)	Sine Encoder		N-m	5.3	9.8	17.7
Torque 40°C	Resolver	Tc	lb-ft	4.3	8.0	14.5
	Resolvei		N-m	5.8	10.8	19.7
Max. Operating Spee	d	N max	rpm	800	800	800
480/400 V 3 Phase			rps	13.3	13.3	13.3
Sine Encoder	Resolution	_	counts/rev	1,048,576	1,048,576	1,048,576
	Repeatability	_	arc/sec	±1.24	±1.24	±1.24
System	Accuracy	-	arc/sec	±27	±27	±27
Resolver	Resolution	_	counts/rev	131,072	131,072	131,072
	Repeatability	_	arc/sec	±10	±10	±10
System	Accuracy	_	arc/sec	±270	±270	±270
Mechanical:						
Weight		Wt	lb	20.8	25.0	30.5
			kg	9.4	11.3	13.8
Rotor Inertia		Jm	lb-ft-sec ²	0.0045	0.0052	0.0064
			kg-m²	0.0061	0.0071	0.0086
Static Friction adder		Tf	lb-ft	1.8	1.8	1.8
for sealed units			N-m	2.4	2.4	2.4
Max. Dynamic Axial	Compression	-	lbf	4,500	4,500	4,500
Load (See page 20 fo	r details)		kg	2,040	2,040	2,040


SYSTEM: DH061A/DH061M with SERVOSTAR S610



SYSTEM: DH062A/DH062M with SERVOSTAR S610



SYSTEM: DH063A/DH063M with SERVOSTAR S610



Notes:

- ① For 25° ambient, multiply Tc by 1.06
- All curves assume three phase 400/480 input power.
- As with any Kollmorgen product, if there are any questions regarding this information or application of this product, please consult Customer Support and we will be glad to assist you.


DANAHER MOTION is a registered trademark of Danaher Corporation. Danaher Motion makes every attempt to ensure accuracy, reliberations are subject to change without notice. Danaher Motion provides this information "AS IS" and disclaims all warranties, express or implied, including, but not limited to, implied warranties of merchantability and fitness for a prejudice property is grayes projecting big to the product user to determine the suitability of this product for a specific application. ©2004 Danaher Motion.

Toll Free Fax (877) SERV099


www.electromate.com

System Performance:		Symbols	Units	DH081A/DH081M	DH082A/DH082M	DH083A/DH083M
Peak Torque		Тр	lb-ft N-m	37.6 51.0	77 104	130 177
Continuous (1)	Sine Encoder	Tc	lb-ft N-m	11.7 15.9	19.1 25.9	37.2 50.4
Torque 40°C	Resolver	Tc	lb-ft N-m	13.0 17.6	21.2 28.7	41.3 56.0
Max. Operating Speed 230/115 V Single Phase		N max	rpm rps	500/500 8.3/8.3	500/500 8.3/8.3	500/400 8.3/6.7
Sine Encoder	Resolution Repeatability		counts/rev arc/sec	1,048,576 ±1.24	1,048,576 ±1.24	1,048,576 ±1.24
System	Accuracy Resolution	-	arc/sec counts/rev	±27 196,608	±27 196,608	±27 196,608
Resolver System	Repeatability Accuracy	-	arc/sec	±6.6 ±140	±6.6 ±140	±6.6 ±140
Mechanical:	Accuracy		aicisec	± 140	± 140	± 140
Weight		Wt	lb kg	39.5 17.9	47.5 21.5	63.6 28.8
Rotor Inertia		Jm	lb-ft-sec² kg-m²	0.0106 0.0144	0.0143 0.0194	0.0222 0.0301
Static Friction adder for sealed units		Tf	lb-ft N-m	2.0 2.7	2.0 2.7	2.0 2.7
Max. Dynamic Axial Co Load (See page 20 for	•	-	lbf kg	7,400 3,360	7,400 3,360	7,400 3,360


SYSTEM: DH081A/DH081M with SERVOSTAR S610



SYSTEM: DH082A/DH082M with SERVOSTAR S610




SYSTEM: DH083A/DH083M with SERVOSTAR S610




- ① For 25° ambient, multiply Tc by 1.06
- ② All curves assume three phase 400/480 input power.
- As with any Kollmorgen product, if there are any questions regarding this information or application of this product, please consult Customer Support and we will be glad to assist you.

System Performance:		Symbols	Units	DH101A/DH101M	DH102A/DH102M	DH103A/DH103M
Peak Torque		Тр	lb-ft	104	186	370
			N-m	141	252	501
	Sine Encoder	Tc	lb-ft	25.5	46.8	85.0
Continuous (1)	Sine Encoder		N-m	34.6	63.4	115.3
Torque 40°C	Resolver	Tc	lb-ft	30.0	55.0	100
	Resolver		N-m	40.7	74.6	136
Max. Operating Spee	d 230V	N max	rpm	300/300	300/300	250/200
			rps	5.0/5.0	5.0/5.0	4.2/3.3
Sine Encoder	Resolution	-	counts/rev	1,048,576	1,048,576	1,048,576
	Repeatability	-	arc/sec	±1.24	±1.24	±1.24
System	Accuracy		arc/sec	±27	±27	±27
Resolver	Resolution (3)	-	counts/rev	262,144	262,144	262,144
System	Repeatability	-	arc/sec	±5.0	±5.0	±5.0
System	Accuracy		arc/sec	±135	±135	±135
Mechanical:						
Weight		Wt	lb	69.5	96.5	134
•			kg	31.5	43.8	60.8
Rotor Inertia		Jm	lb-ft-sec ²	0.0511	0.0732	0.129
			kg-m²	0.0693	0.0992	0.175
Static Friction adder		Tf	lb-ft	2.6	2.6	2.6
for sealed units			N-m	3.5	3.5	3.5
Max. Dynamic Axial C	Compression	-	lbf	11,700	11,700	11,700
Load (See page 20 fo	r details)		kg	5,300	5,300	5,300


SYSTEM: DH101A/DH101M with SERVOSTAR S610



SYSTEM: DH102A/DH102M with SERVOSTAR S610



SYSTEM: DH103A/DH103M with SERVOSTAR S614



Notes:

- ② All curves assume 3 phase 400/480 input power.
- As with any Kollmorgen product, if there are any questions regarding this information or application of this product, please consult Customer Support and we will be glad to assist you.


DANAHER MOTION is a registered trademark of Danaher Corporation. Danaher Motion makes every attempt to ensure accuracy, reliberations are subject to change without notice. Danaher Motion provides this information "AS IS" and disclaims all warranties, express or implied, including, but not limited to, implied warranties of merchantability and fitness for a prejudice property is grayes projecting big to the product user to determine the suitability of this product for a specific application. ©2004 Danaher Motion.

Toll Free Fax (877) SERV099


www.electromate.com

System Performance:		Symbols	Units	DH141M	DH142M	DH143M
Peak Torque		Тр	lb-ft	271	383	989
			N-m	367	519	1341
Continuous (1)	Sine Encoder	Tc	lb-ft	80	135	250
Torque 40°C			N-m	108	183	339
Max. Operating Spee	d	N max	rpm	300/300	300/250	120/120
230 V 3 Phase			rps	5/5	5/4.2	2/2
Sine Encoder	Resolution	-	counts/rev	1,048,576	1,048,576	1,048,576
	Repeatability	_	arc/sec	±1.24	±1.24	±1.24
System	Accuracy	-	arc/sec	±27	±27	±27
Mechanical:						
Weight		Wt	lb	131	191	323
			kg	59.4	86.6	146
Rotor Inertia		Jm	lb-ft-sec ²	.120	.202	.400
			kg-m²	.163	.274	.542
Static Friction adder		Tf	lb-ft	2.6	2.6	2.6
for sealed units			N-m	3.5	3.5	3.5
Max. Dynamic Axial Compression		-	lbf	12,700	12,700	12,700
Load (See page 20 fo	r details)		kg	5,760	5,760	5,760


SYSTEM: DH141M with SERVOSTAR S614



SYSTEM: DH142M with SERVOSTAR S614




SYSTEM: DH143M with SERVOSTAR S620



Notes

- ① For 25°C ambient, multiply by 1.06.
- All curves assume three phase 400/480V input power.
- As with any Kollmorgen product, if there are any questions regarding this information or application of this product, please consult Customer Support and we will be glad to assist you.

Dimensions - D06x Frame

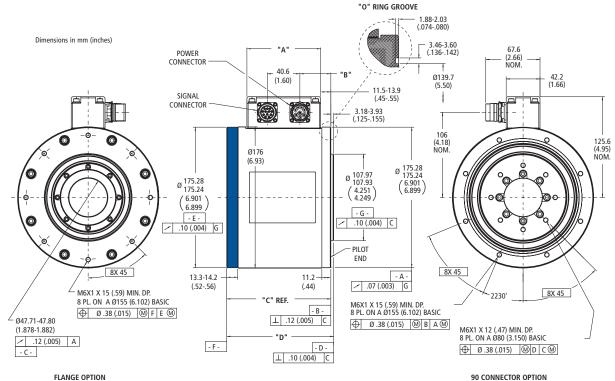


0 8 0 Ø ė 0 0 220.01 219.97 `B^ Ø (8.662 8.660) - E -0 / .10 (.004) G Ø. Ò 2230' 13.3-14.2 (.52-.56) - F -8X 45 ⊥ .25 (.010) G 98.82-8.99 (.347-.354) THRU 8 PL. ON A Ø200.0 (7.874) BASIC

⊕ Ø.38 (.015) M F E M

POWER CABLE BEND RADIUS: STATIC - 127 (5.0) DYNAMIC - 191 (7.5) FEEDBACK CABLE BEND RADIUS: STATIC - 107 (4.2) DYNAMIC - 160 (6.3) 147.3 (5.80) NOM. 106 (4.18) NOM.	394.97 (15.55) MAX.
106	

Model	"A"	"B"	"C"	"D"	"[<u> </u>
D061	91.9	37.1-40.1	129.42-130.171	32.59-134.11	Resolver	Sine Encoder
	(3.62)	(1.46-1.58)	(5.095-5.125)	(5.220-5.280)		
D062	103.4	48.6-51.5	140.85-141.601	44.02-145-54	Ø47.71-47.80	Ø42.88-42.98
	(4.07)	(1.91-2.03)	(5.545-5.575)	(5.660-5.730)	(1.878-1.882)	(1.688-1.692)
D063	126.2	71.4-74.4	163.71-164.46	166.88-168.40		
	(4.97)	(2.81-2.93)	(6.445-6.475)	(6.570-6.630)		




DANAHER MOTION is a registered trademark of Danaher Corporation. Danaher Motion makes every attempt to ensure accuracy, reliberations are subject to change without notice. Danaher Motion provides this information "AS IS" and disclaims all warranties, express or implied, including, but not limited to, implied warranties of merchantability and fitness for a prejudice property is grayes projecting big to the product user to determine the suitability of this product for a specific application. ©2004 Danaher Motion.


Toll Free Fax (877) SERV099

www.electromate.com


Kollmorgen GOLDLINE® DDR Kollmorgen Dimensions – D08x Frame

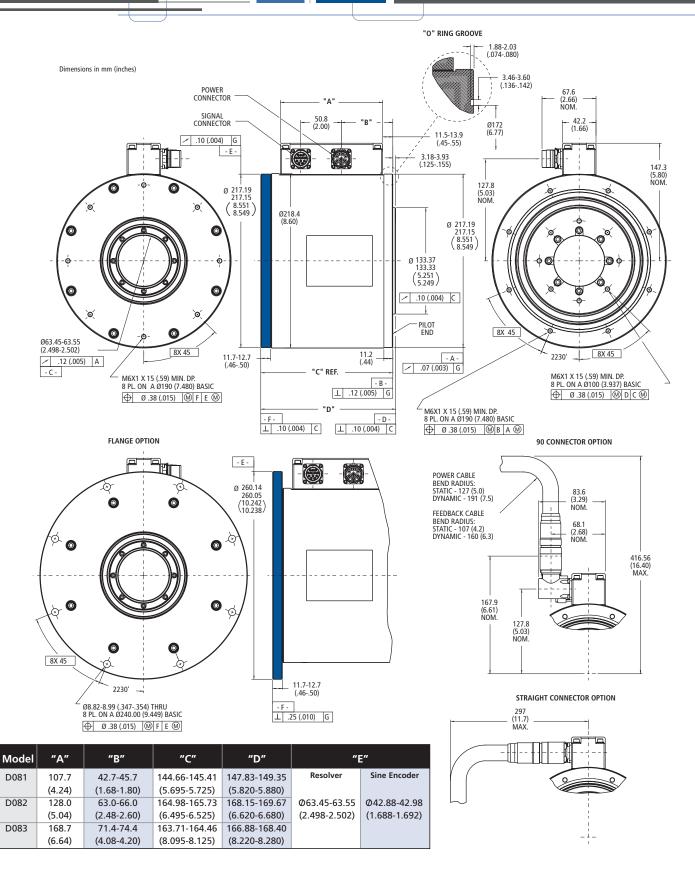



Dimensions – D10x Frame Kollmorgen GOLDLINE® DDR

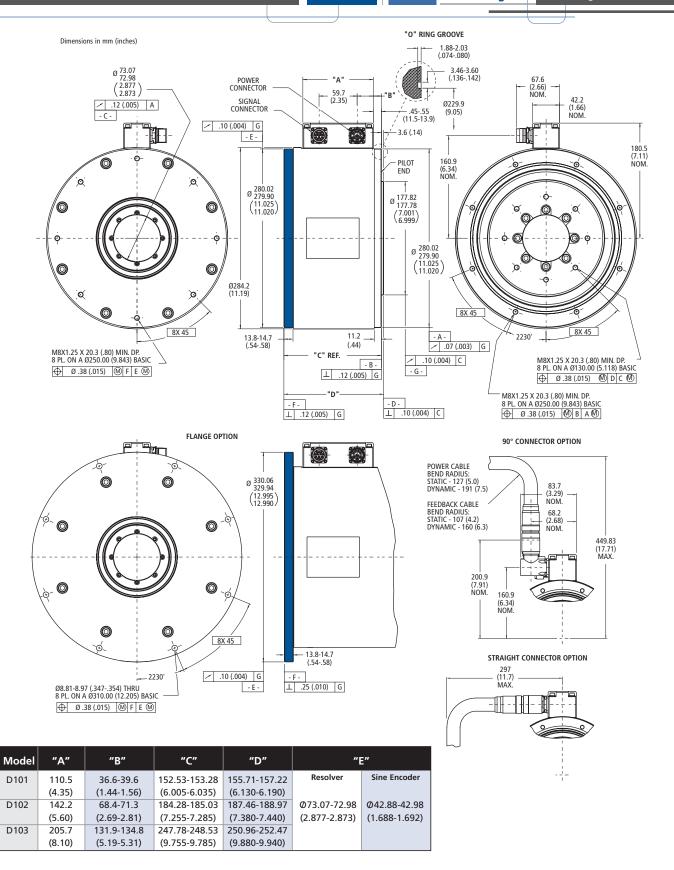


Kollmorgen GOLDLINE® DDR Kollmorgen Dimensions – D14x Frame

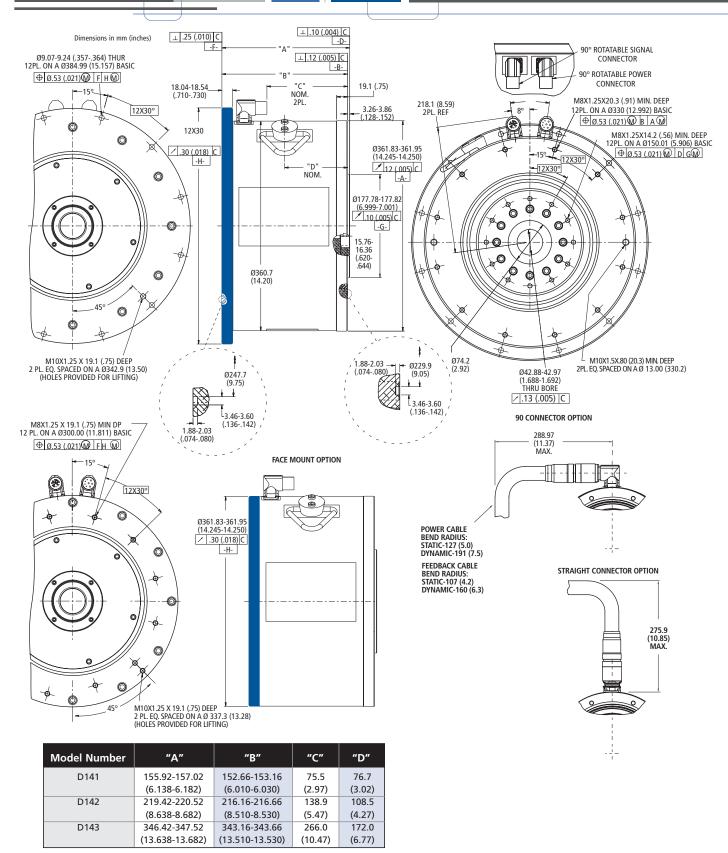







 $Moment\ Load = Force * D$

Maximum Moment Load

Maximum Axial Load Ratings

Single Bearing ————			Dual Bearing —				
Model	lb-ft	N-m	lb-ft	N-m		lbs	kg
D061	53.3	72.3	71.7	97.2			
D062	47.5	64.4	79.5	107.8	Compression Tension	4500 932	2040 423
D063	43.4	58.9	87.2	118.2	lension		
D081	62.6	84.9	113.8	154.3		7400	2260
D082	52.3	70.9	130.6	177.1	Compression Tension	7400 819	3360 371
D083	39.3	53.3	174.3	236.4	Terision		
D101	141.9	192.4	322.4	437.2	Ci	11700	F300
D102	107.7	146	278.5	377.6	Compression Tension	11700 1405	5300 637
D103	72.6	98.4	304.8	413.3	Terision	1405	037
D141	234	317	472	640			
D142	134	182	409	555	Compression Tension	11700	5300
D143	N/A	N/A	391	530	lension	1405	637

Application notes:

- ① Axial load ratings dynamic values based on an L10 life rating when motor is mounted on a rigid base and running under normal operating conditions. For L10 life ratings for applications where high rotational accuracy is desired or operation during vibration or shock, please contact Customer Support.
- Moment load ratings are limited by shaft deflection at the resolver; for sine encoder units please contact Customer Support.
- $\$ Standard motor is not designed for repetitive small angle oscillations less than \pm 13°. Please contact Customer Support for additional options.

- Motor is not intended to be directly coupled to a load which has it's own two bearing system.
 A flexible coupling is advised to prevent premature bearing failure in these applications.
 Motor may be mounted in any orientation provided the axial (both tension and compression) limits are observed. All applications having moment loads in tension should be reviewed by Customer Support.
- ® All bolts for mounting load and base should be used to ensure stiff coupling.


Model	Dim. "L" (in)
D(H)06x	(1.05)
D(H)08x	(1.21)
D(H)10x	(1.58)
D(H)14x	(1.44)

System Cable Sets with SERVOSTAR®

Drive	Sine Encoder	Resolver
SERVOSTAR CD	CS-SS-SHA1HE-xx	CS-SS-RHA1HE-xx
SERVOSTAR S610	CS-SS-S3HG1HE-xx	CS-SS-RHG1HE-xx
SERVOSTAR S614 & S620	CS-SS-S3HG2HE-xx	CS-SS-RHG2HE-xx

DANAHER MOTION is a registered trademark of Danaher Corporation. Danaher Motion makes every attempt to ensure accuracy reliables to the post table table to the post table table to the post table table table to the post table tab

*The Kollmorgen GOLDLINE® DDR system is comprised of three part numbers; motor, drive, and cable set. When ordering, please specify each part number.

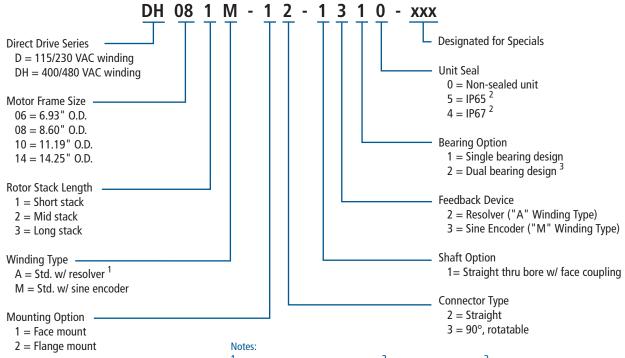

¹ All models except D14x & DH14x. ² Resolver models only. ³ Standard on D143 & DH143 models.

SERVOSTAR® CD Amplifier Ratings

Model CR/CB	Output Continuous Current Per Phase (RMS/phase) @ 45°C Ambient	Output Peak Current Per Phase (RMS/Phase)	AC Input Line Voltage	Rated Input Power kW	Rated Input Power (kVA) @ 480V	Regen. Option	
06	6	18 (.5 sec.)	115 / 230 (1 phase)	1.1	1.4 / 2.8	ERH-26	
10	10	20 (2 sec.)	230 (3 phase)	3.7	4.7	ERH-26	

SERVOSTAR® 600 Amplifier Ratings


Model	Output Continuous Current Per Phase (RMS/phase)	Output Peak Current Per Phase (5 sec)	Internal Power Dissipation (Watts)	AC Input Line Voltage (3 phase)	Rated Input Power (kVA) @ 480V	Continuous Inernal Regen Power (Watts)	Continuous External Regen Power (Watts)
S610	10	20	90		8.1	200	1,500
S614	14	28	160	480/400	11.6	200	1,500
S620	20	40	200		16.6	200	1,500




Resistive Regeneration Sizing

Shunt regeneration is required to dissipate energy that is pumped back into the DC bus during load deceleration. The amount of shunt regeneration required is a function of the sum of simultaneously decelerating loads. The loads need to be defined in terms of system inertia, maximum speed, and deceleration time. In addition, the duty cycle must be known. Application Note A-SU-001-H details a calculation method to determine proper regeneration sizing.

Model	Watts	Ohms
ERH-26	200	20





Transformer Sizing (Required only for voltage matching)


The SERVOSTAR CD can be connected to a line. Built-in soft-start circuitry protects power supply components and eliminates nuisance tripping of breakers or fuse blowing due to large in-rush currents. Transformers are only required for voltage matching purposes. In this case, the transformer should have a 115 or 230 VAC secondary depending on the operating voltage. The kVA rating of the transformer should take into account not only the servo output load requirements but also losses in the system and power factor. For single phase operated systems such as these, the transformer kVA ratings should be two times the CD amplifier output power rating. For three phase systems, the transformer kVA should be 1.5 times the CD amplifier output power rating.

Model CR/CB	Transformer kVA rating
06	4.4 (1 phase)
10	5.6 (3 phase)

Kollmorgen GOLDLINE® DDR Kollmorgen Amplifier Dimensions

CR/CB - 06/10 Dimensions


Dimensions in mm (inches)

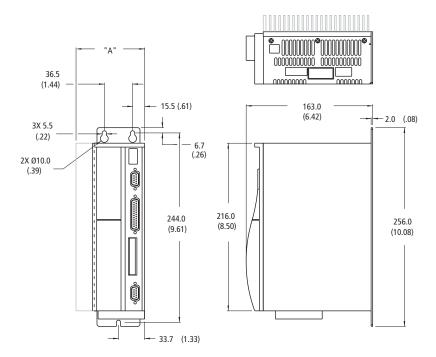

Size	Dim. "A"
6 AMP	88.4 (3.48)
10 AMP	99.0 (3.90)

S610, S614 & S620 Dimensions

Dimensions in mm (inches)



N	/lodel	Size	Dim "A"
9	610	10 AMP	70 (2.8)
9	614	14 AMP	100 (3.9)
9	5620	20 AMP	120 (4.7)

DANAHER MOTION is a registered trademark of Danaher Corporation. Danaher Motion makes every attempt to ensure a security and disclaims all warranties, express or implied, including, but not limited to, implied warranties of merchantability and fitness formation and the security is the product user to determine the suitability of this product for a specific application. ©2004 Danaher Motion.

Toll Free Fax. (877) SERV099

www.electromate.com

Find additional Kollmorgen GOLDLINE® DDR series product information

DanaherMotion.com offers many new tools to help serve your needs. We've developed an inuitive Web-based system to increase your knowledge of motion control, search our vast product selection by product attribute (using our New Product Advisors), and easily locate your nearest Danaher Motion distributor or Sales office.

Visit www.DanaherMotion.com for more information and see our latest tools.







DANAHER MOTION is a trademark.

Danaher Motion makes every attempt to ensure accuracy and reliability of the specifications in this publication. Specifications are subject to change without notice. Danaher Motion provides this information "AS IS" and disclaims all warranties, express or implied, including, but not limited to, implied warranties of merchantability and fitness for a particular purpose. It is the responsibility of the product user to determine the suitability of this product for a specific application.

©2004 Danaher Motion. IG 10M OCG/BH 0904 200406-08 MSDR-05.127-062404-3 N103

FOR IMMEDIATE ASSISTANCE:

MMEDIATE ASSISTA	INCE:						
Internet:	www.DanaherMotion.com						
In USA, Canada	Phone:	1-540-633-3400	In Europe:	Phone:	+46 (0) 44 24 67 00		
or Mexico:	Fax: 1-540-639-4162			Fax:	+46 (0) 44 24 40 85		
	E-mail: DMAC@danahermotion.com			E-mail:	helpdesk@tollo.com		
	Literature:	litrequest@danahermotion.com	or write:	Danaher Motion			
or write:	Danaher Motio	n		Tollo Linear AB			
	203A West Rock Road			Box 9053			
	Radford, VA 24141 USA			SE-291 09 Kristianstad Swe	den		
In UK:	Phone:	0800 975 1000	or	Phone:	+49 (0) 70 22 504-0		
	Sales Fax:	0800 975 1001		Fax:	+49 (0) 70 22 541-68		
	E-mail:	LMSEurope@danahermotion.com	or write:	Danaher Linear GmbH			
or write:	Danaher Linea	r Motion Systems		Nürtinger Strasse 70			
	Fishleigh Road	, Roundswell Business Park Toll Free Phone (877) SERVO		D-72649 Wolfschlugen Gern	nany		
	Barnstaple		⁹ Elsewhere:	Phone:	1 (516) 883-8937		
	EX31 3UD UK			Fax:	1 (516) 883-7109		