# **URS SERIES**

www.DanaherMotion.com



# **COMPACT BALLSCREW POSITIONING TABLES**

The IDC URS-series with integrated stell real provides superior product performance in a compace package.







Toll Free Phone (877) SERV098 Toll Free Fax (877) SERV099 www.electromate.com sales@electromate.com

URS Series

IDC Page Title

# **Welcome to Danaher Motion - IDC**

While business cycles will ebb and flow, technological advancements across a multitude of industries march forward. In many cases, the success of these advancements hinges upon the ability of engineers to create automated systems capable of accurately manipulating materials at both the macro and microscopic levels. Danaher Motion solutions are often at the core of these systems. Many recent advancements in the semiconductor, flat panel display, data storage, digital imaging, transportation, machine automation, and life sciences markets have been made possible by actuators and positioning systems designed and manufactured by Danaher Motion.

IDC offers an expansive range of mechanical and control products for automated positioning applications. Our customers turn to us for complete solutions to their automation needs. Our products are found in a wide variety of industrial, scientific, and commercial applications. Virtually anywhere that thrust, torque, speed, or position must be controlled, IDC has the solution. Our electromechanical product offering is highlighted by our standard product range of Electric Cylinders, Rodless Actuators, and Precision Positioning Tables.

**Electric Cylinders** are essentially thrust producing devices that are best suited for applications requiring high axial force with the moment and side loads already properly supported.

Screw driven **Rodless Actuators** are also thrust producing devices that are best for axial force applications where the space is limited and a payload must also be supported or carried. As individual components, Rodless Actuators are not well suited for moment loading; however, they can be effectively combined into complete Cartesian Systems for some multi-axis applications. For higher speed, lower thrust applications, Rodless Actuators can be repeatably driven with a timing belt instead of a screw.

**Precision Positioning Tables** are best suited for applications where the accuracy and repeatability requirements are more important than axial thrust of the drive train. Precision Positioning Tables can also be used in less precise applications where adequate moment load support is necessary. Precision Positioning Tables are ideal building blocks for complete multi-axis positioning systems.

Our IDC product brand contains hundreds of standard electromechanical solutions. Still, we recognize that each application is unique and so we continue to welcome opportunities that require modification and occasionally complete redesign of our standard solutions.

Contact Danaher Motion today to discuss how we can put our trusted brand names, extensive product portfolio, and extensive applications expertise to work to provide you with your total motion control solution.



URS 3305A-150-X2345 Positioning Table



XY featuring URS20 Positiong Tables. Consult factory for multi-axis configurations.



URS Series IDC

# Table of Contents

# **TABLE OF CONTENTS:**

Welcome to Danaher Motion – IDC	side Front Cover
Table of Contents	
URS Overview	
Specifications	
URS20	
URS26	
URS33	
URS46	
URS55	
Dimensional Drawings	
URS20 6	
URS26	
URS33	0
URS46	4
URS55	3
Motor Options	
Flanges for Customer Mounted Motors	0
Stepper Motors	2
Servo Motors24	
Cleanroom Lubrication Option	5
Raydent Surface Treatment Option	5
Limit Switch Options	5
Inertia of the Carriage(s) and Ballscrews	3
Accuracy Standards	9
Rated Life Calculations	0
Part Numbering/Ordering Information	2
Configuration Guide	side Back Cover
Lubrication and Operation Notes	sida Pask Cover

# URS = U RAIL SYSTEM.

The URS is a compact single-axis positioning table which integrates a linear bearing and precision ballscrew.

The URS series offers compact dimensions and outperforms conventional positioning tables. This is made possible by a unique "U" shaped guide rail and recirculating bearing module which provides the dual functions of a guide block and a ball screw nut. The "U" shaped guide rail design offers a highly rigid structure resistant to bending, allowing the URS to be single-end supported. Additionally, the bearing module contains four ball circuits which deliver high load capacity, high accuracy and high rigidity.

- COMPACT SIZE
- OPTIMIZED DESIGN
- RIGIDITYVALUE

#### Packaged Solution:

The integration of the slide guide and precision ballscrew eliminates complex precision adjustment and reduces installation time dramatically as compared to purchasing and assembling individual components.

#### High Rigidity:


"U" shaped steel guide rail provides very high rigidity despite its compact profile, and excels in one-end supported (cantilevered slide) applications.

#### High Accuracy:

The URS shuttle carriage contains four ball circuits and four-point contact ball grooves, which contributes to its high rigidity. The combination of precision ground guide rail, carriage, and precision grade ball screw provides high positioning accuracy.

#### Space Saving:

In comparison to conventional positioning tables, the compact design of the URS allows for dramatic space savings. The "U" shaped guide rail and integrated carriage/ballnut design make this possible.

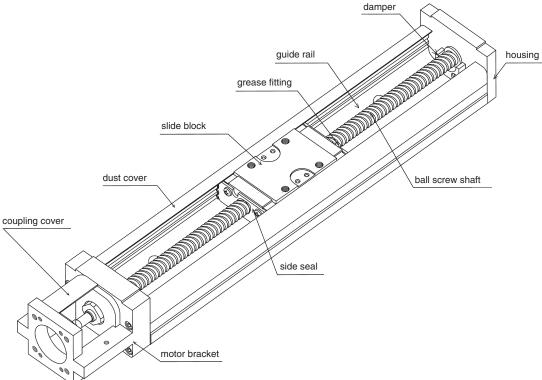





# **URS-SERIES OVERVIEW**

The IDC URS-Series Positioning Tables provide superior product performance in a compact size envelope.

 A precision ground steel base/rail provides exceptional rigidity and accuracy.

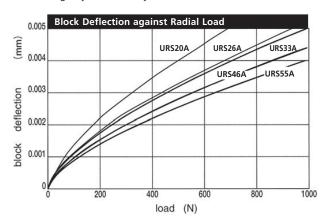


- The integrated linear bearing and precision ballscrew minimize the cross-sectional profile of the URS (see drawings below).
- The four-row linear bearing structure maximizes the rigidity of the carriage, and allows the URS to be mounted in any orientation.

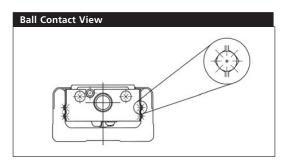

# 40 URS46 20 URS20 0 20 40 60 80 100

#### **SELECTABLE OPTIONS & ACCESSORIES**

- Travel lengths from x to x cover a wide range of applications.
- Standard- and short-version carriages, and single- and dual-carriage options increase flexibility of load carrying.
- Commercial Grade with repeatability down to +/- 5 microns, and Precision Grade with repeatability down to +/- 3 microns.
- Motor flanges for NEMA 16, 17, 23 and 34 frame motors.
- Standard servo and stepper motor options.
- Hardcover is available to protect internal components and to contain lubrication within the URS.
- Limit switch packages with three (3) sensors adjustable throughout the range of travel.
- Cleanroom grease option for particulate-sensitive environments.
- Raydent surface treatment option for improved rustresistance of the steel rail.





# **SPECIFICATIONS**

	URS20 URS26			URS33									
RAIL LENGTH (mm)	100	150	200	150	200	250	300	150	200	300	400	500	600
HEIGHT (base to carriage top)													1
without cover option (mm)		20			2	6				3:	3		
without cover option [-H] (mm)		32			4					48			
BASE WIDTH (mm)		40		50			60						
MAX TRAVEL (hardstop to hardstop)													
single long carriage [A] (mm)	43	93	143	74	124	174	224	60	110	210	310	410	510
dual long carriage [B] (mm)	_	50	100	_	60	110	160	_	_	133	233	333	433
single short carriage [C] (mm)	_	_	_	_	_	_	_	85	135	235	335	435	535
dual short carriage [D] (mm)	_	_	_	_	-	_	_	34	84	184	284	384	484
ACCURACY		l					l	<u> </u>	0.		20.	50.	1 .0 .
commercial grade (microns)		50			5	0		3	0	3	5	40	70
precision grade [P] (microns)		20			2			1		2		25	-
FLATNESS OF TRAVEL										_			
commercial grade (microns)		25			2	5			25			35	
precision grade [P] (microns)		10			1				10			15	
REPEATABILITY		.0							10			13	
commercial grade (microns)		±5			±	5				±!	5		
precision grade [P] (microns)		±3								±:			
PITCH & YAW								±3					
commercial grade (microns)	х	х	х	х	х	Х	х	x x x x x x			Х		
precision grade [P] (microns)	X	X	X	X	X	X	X	X	X	X	X	X	X
LOAD CAPACITY, NORMAL (kg)	X	x	x	X	X					X	X	X	x
AXIAL LOAD CAPACITY (kg)	X	X	X	X	x	X	X	X X	X X	X	X	X	x
ACCELERATION, MAX (m/sec2)	X	X	x	x	x	X	X	X	X	X	X	X	x
MOVING MASS	^	X		^	^	^	^	^	^	^	^	^	_ ^
long carriage [A,B] w/o cover option (kg)		0.07			0.	17				0.3	RO		
long carriage [A,B] w/ cover option [-H] (kg)		0.11		0.24					0.4				
short carriage [C,D] w/o cover option (kg)		_		-			0.15						
short carriage [C,D] w/ cover option [-H] (kg)		_		_			0.20						
TOTAL MASS								0.20					
single long carriage [A] w/o cover option (kg)	0.42	0.58	0.71	0.93	1.14	1.36	1.57	1.6	2.0	2.6	3.2	3.9	4.6
dual long carriage [B] w/o cover option (kg)	0.52	0.65	0.78	1.10	1.31	1.36	1.57	_	_	2.9	3.6	4.2	4.9
single short carriage [C] w/o cover option (kg)	_	_	_	-	_	-	-	1.5	1.8	2.5	3.1	3.8	4.4
dual short carriage [D] w/o cover option (kg)	_	_	_	_	_	_	_	1.7	2.0	2.7	3.3	3.9	4.6
single long carriage [A] w/ cover option (kg)	0.50	0.63	0.77	1.07	1.30	1.53	1.76	1.8	2.1	2.8	3.5	4.2	4.9
dual long carriage [B] w/ cover option (kg)	0.61	0.74	0.88	1.31	1.54	1.78	2.01	-	_	3.2	3.9	4.6	5.3
single short carriage [C] w/ cover option [-H] (kg)	-	-	-	-	-	-	-	1.6	2.0	2.6	3.3	4.0	4.7
dual short carriage [D] w/ cover option [-H] (kg)	_	_	_	_	_	_	_	1.9	2.2	2.9	3.5	4.2	4.9
BALL SCREW DIAMETER (mm)		6						1.5	2.2	10		7.2	1.5
DUTY CYCLE (%)						100							
BALLSCREW EFFICIENCY (%)						90							
MAX BREAKAWAY TORQUE						50							
commercial grade (oz-in)		0.7			2.	1				9.	g		
precision grade [P] (oz-in)		1.7			5.					21.2			
MAX RUNNING TORQUE		1.7				,				21.2			
commercial grade (N-m)	X	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	X
precision grade [P] (N-m)	X	X	X	X	X	X	X	X	X	X	X	X	X
BALLSCREW LEADS AVAILABLE (mm)		1, 5		_^_		. 5				5,			
BACKLASH		1, 5				, ,				٥,	10		
commercial grade (microns)		10			1	n				10	1		
precision grade [P] (microns)		3			3					3	,		
MAX BALLSCREW SPEED (rev/sec)		187			14				1	<u></u>		93	62
MAY DATESCUELL SI FED (164/260)		107			14	ru				10		23	0Z

[ ] Indicates option code



# **SPECIFICATIONS**

**IDC** 

	URS46							URS55			
DAIL LENGTH ( )	240	440	F40		740	040	0.40	000	1		4200
RAIL LENGTH (mm)	340	440	540	640	740	840	940	980	1080	1180	1280
HEIGHT (base to carriage top)				46						_	
without cover option (mm)				46						55	
without cover option [-H] (mm)				68						80	
BASE WIDTH (mm)				86				100			
MAX TRAVEL (hardstop to hardstop)								024   024   4024			
single long carriage [A] (mm)	209	309	409	509	609	709	809	834	934	1034	1134
dual long carriage [B] (mm)	100	200	300	400	500	600	700	711	811	911	1011
single short carriage [C] (mm)	245	345	445	545	645	745	845	-	-	-	-
dual short carriage [D] (mm)	172	272	372	472	572	672	772	-	_	_	_
ACCURACY							-				
commercial grade (microns)	35			10	50		00		30		00
precision grade [P] (microns)	20		2	!5	30		_	3	85	40	
FLATNESS OF TRAVEL						_					
commercial grade (microns)		35 40 50				_		0			
precision grade [P] (microns)		15 20 –				-	2	25	30	_	
REPEATABILITY										_	
commercial grade (microns)				±5						:5	
precision grade [P] (microns)				±3					= =	:5	-
PITCH & YAW									T		
commercial grade (microns)	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х
precision grade [P] (microns)	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х
LOAD CAPACITY, NORMAL (kg)	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х
AXIAL LOAD CAPACITY (kg)	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х
ACCELERATION, MAX (m/sec2)	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х
MOVING MASS											
long carriage [A,B] w/o cover option (kg)				0.9						.7	
long carriage [A,B] w/ cover option [-H] (kg)				1.2						.3	
short carriage [C,D] w/o cover option (kg)				0.5						_	
short carriage [C,D] w/ cover option [-H] (kg)				0.7					-		
TOTAL MASS											
single long carriage [A] w/o cover option (kg)	6.5	8.0	9.0	10.5	12.0	13.0	14.5	20	22	23	25
dual long carriage [B] w/o cover option (kg)	7.5	8.5	10.0	11.5	13.0	14.0	15.5	22	24	25	27
single short carriage [C] w/o cover option (kg)	6.0	7.5	8.5	10.0	11.5	13.0	14.0	_	-	_	-
dual short carriage [D] w/o cover option (kg)	6.5	8.0	9.5	10.5	12.0	13.5	14.5	_	-	_	-
single long carriage [A] w/ cover option (kg)	7.0	8.5	10.0	11.0	12.5	14.0	15.5	21	23	25	27
dual long carriage [B] w/ cover option (kg)	8.0	9.5	11.0	12.5	14.0	15.5	16.5	24	26	27	29
single short carriage [C] w/ cover option [-H] (kg)	6.5	8.0	9.5	10.5	12.0	13.5	15.0	_	-	_	_
dual short carriage [D] w/ cover option [-H] (kg)	7.0	8.5	10.0	11.5	13.0	14.0	15.5	_	_	_	_
BALL SCREW DIAMETER (mm)				15					2	20	
DUTY CYCLE (%)				100					1	00	
BALLSCREW EFFICIENCY (%)				90					g	00	
MAX BREAKAWAY TORQUE											
commercial grade (oz-in)				14.2					1	7.0	
precision grade [P] (oz-in)		21.2		24	1.0		-	24	1.0	28.3	-
MAX RUNNING TORQUE											
commercial grade (N-m)											
precision grade [P] (N-m)											
BALLSCREW LEADS AVAILABLE (mm)	10, 20						2	20			
BACKLASH											
commercial grade (microns)		10						50			
precision grade [P] (microns)		3				-		3 -			
MAX BALLSCREW SPEED (rev/sec)		74			65	50	39	56	45	37	31
* * * * * * * * * * * * * * * * * * *											

 $All \ performance \ specifications \ are \ based \ upon \ proper \ mounting \ procedures, with \ the \ URS \ fully \ supported \ on \ a \ flat \ surface \ (flat \ within \ v0.008mm/300mm).$ 

Above specifications are measured 37.5mm directly above the center of the carriage.

 $Specifications \ are \ based \ upon \ operation \ at \ 20^{\circ} \ C. \ Contact \ IDC \ to \ discuss \ your \ low- \ and \ high-temperature \ applications.$ 


URS positioning tables are rated for normal loads (load vector directed down onto the surface of the carriage), for axial loads (load vector directed in the direction of travel), and for moment loads (torsional loads caused by loads with an offset center of gravity). The moment loading limits are based on the maximum moment in pitch, roll or yaw including any dynamic components that are move profile dependent. Visit www.DanaherMotion.com/urs to use our moment loading calculator.


\*The specifications in this publication are believed to be accurate and reliable. However, it is the responisbility of the product user to determine the suitability of IDC products for a spcific application. Specifications are subject to change without notice.





# **URS20 DIMENSIONAL DRAWING**


**Without Cover Option** 




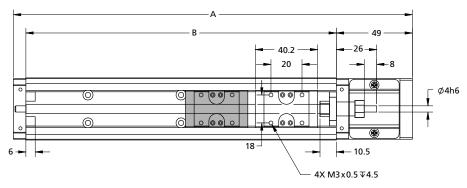



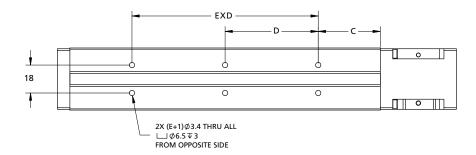










URS Series IDC


# **URS20 DIMENSIONAL DRAWING**

With Cover Option



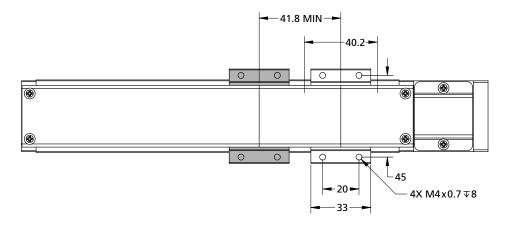





	C	Stroke Limit				
А	В	С	D	E	URS20**A	URS20**B
100	157	20		1	43	-
150	207	15	60	2	93	50
200	257	40		2	143	100





URS26 URS Series


# **URS26 DIMENSIONAL DRAWING**


**Without Cover Option** 


Note: Optional second carriage shaded gray.




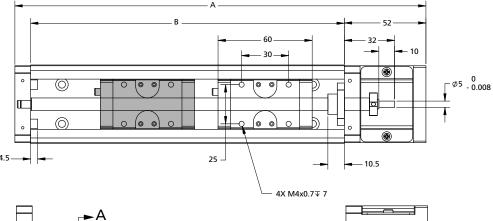



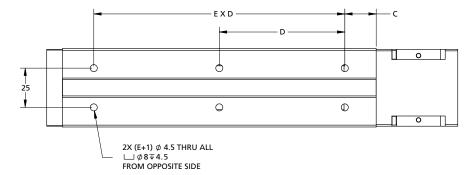










sales@electromate.com


# **URS26 DIMENSIONAL DRAWING**

With Cover Option



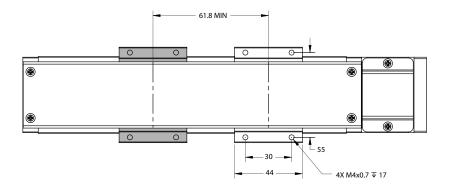

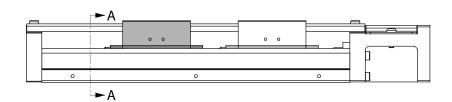




	1	Stroke Limit				
Α	В	С	D	Е	URS26A	URS26B
150	212	35		1	73	-
200	262	20	80	2	127	61
250	315	45	00		173	111
300	362	30		3	223	161





URS 33 UDC URS Series


# **URS33 DIMENSIONAL DRAWING**


Long Carriage(s) Without Cover Option




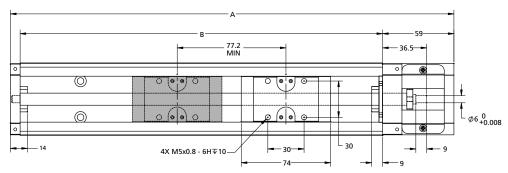



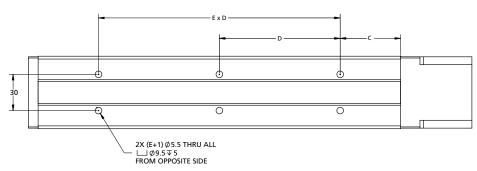










# **URS33 DIMENSIONAL DRAWING**


IDC

Long Carriages(s) With Cover Option



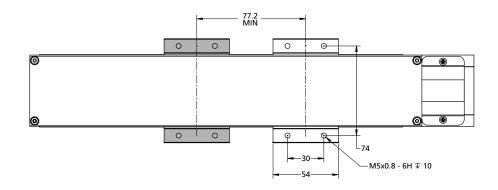

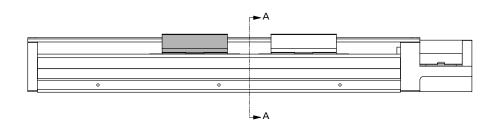




		Stroke Limit							
Α	В	С	D	E	URS33**A	URS33**B			
217	150	25 50		1	60	-			
267	200			'	110	-			
367	300					100	2	210	133
467	400			3	310	233			
567	500			4	410	333			
667	600			5	510	433			





Page Title URS Series


# **URS33 DIMENSIONAL DRAWING**


**Short Carriage(s) Without Cover Option** 




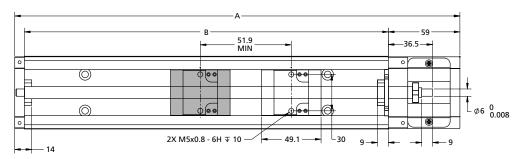



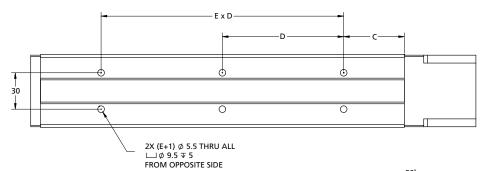










# **URS33 DIMENSIONAL DRAWING**


IDC

Short Carriage(s) With Cover Option



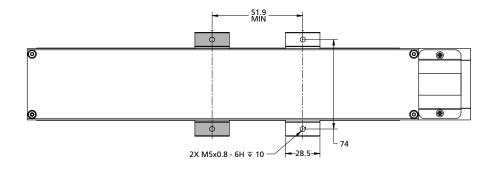

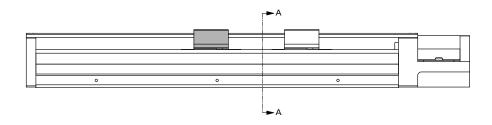




	E	Stroke Limit				
Α	В	С	D	E	URS33**C	URS33**D
217	150	25		1	85	34
267	200		100	'	135	84
367	300			2	235	184
467	400	50	100	3	335	284
567	500			4	435	384
667	600			5	535	484





# **URS46 DIMENSIONAL DRAWING**


86

Long Carriage(s) Without Cover Option



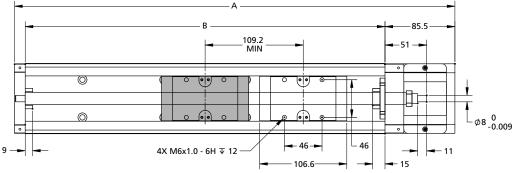




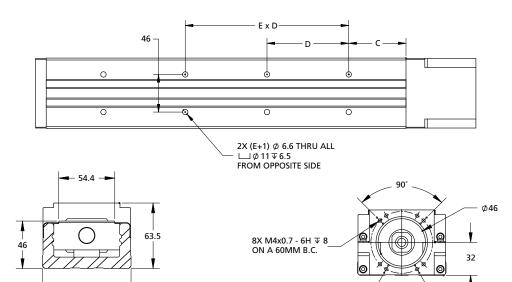






# **URS46 DIMENSIONAL DRAWING**

Long Carriage(s) With Cover Option



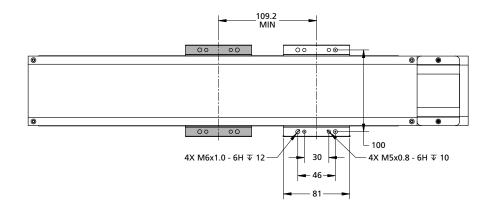

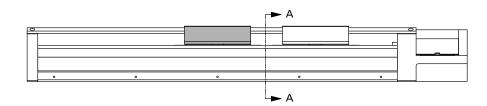




		C	Stroke Limit				
	Α	В	С	D	E	URS46**A	URS46**B
	438.5	340			2	309	100
	538.5	440			3	309	200
	638.5	540		[	4	409	300
	738.5	640	70	100	5	509	400
	838.5	740			6	609	500
	938.5	840			7	709	600
Г	1038.5	940			8	809	700




URS46 URS Series


# **URS46 DIMENSIONAL DRAWING**


**Short Carriage(s) Without Cover Option** 



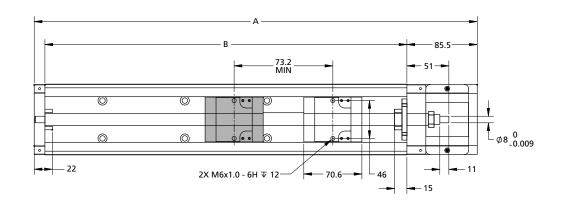













# **URS46 DIMENSIONAL DRAWING**

Short Carriage(s) With Cover Option



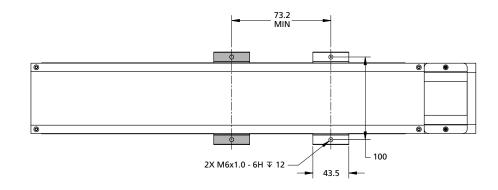

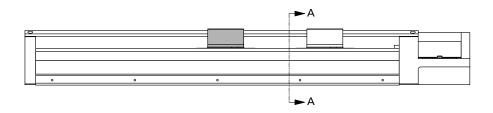




	C	Stroke Limit				
Α	В	С	D	E	URS46**C	URS46**D
438.5	340			2	245	172
538.5	440			3	345	272
638.5	540			4	445	372
738.5	640	70	100	5	545	472
838.5	740			6	645	572
938.5	840			7	745	672
1038.5	940			8	845	772





# **URS55 DIMENSIONAL DRAWING**


**Without Cover Option** 




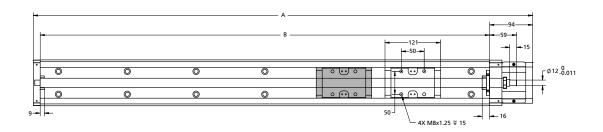



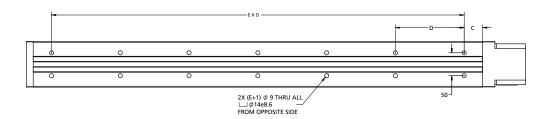



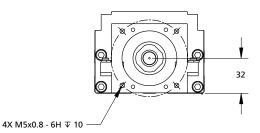






# **URS55 DIMENSIONAL DRAWING**


IDC

With Cover Option



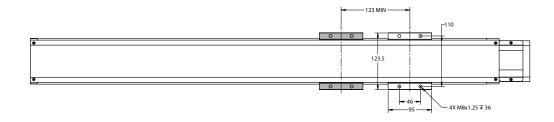





		Stroke Limit				
Α	В	С	D	E	URS55**A	URS55**B
980	1089	40		6	834	711
1080	1189	15		7	934	811
1180	1289	65	150		1034	911
1280	1389	40		8	1134	1011
1380	1489	15		9	1234	1111



# **MOTOR FLANGE OPTIONS**

#### **SELECTION CHART**

	X16	X17	X23	X34
Motor Flange Ref (1)	NEMA 16	NEMA 17	NEMA 23	NEMA 34
Encoder Resolution	-	-	-	-
Motor Brake Description	-	-	-	-
URS20	•	•		
URS26		•		
URS33	•	•		
URS46				
URS55				


(1) Flange/motor dimensions may not be "true" NEMA; Reference drawings provided in this brochure.

# X16 Flanges


URS20

# 1.6" FRAME ∟ Ø30[1.18] ∓3.5 Ø16 COUPLING BORE FOR MOTOR PILOT ( Ø4 ) 0 4X M4x0.7 ▼ 8[0.31] EQ. SPACED ON A 46MM B.C.

#### URS26 1.6" FRAME

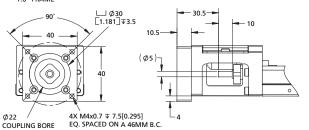


#### URS33

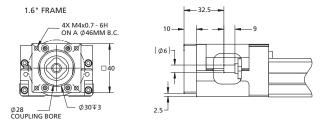


# X17 Flanges


#### URS20

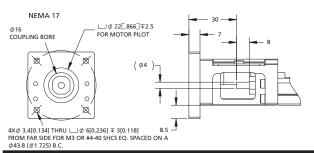

#### URS26

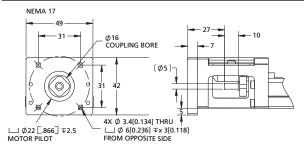


#### URS33

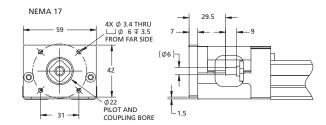





# **X23 Flanges**


#### URS33






#### URS46





#### URS55

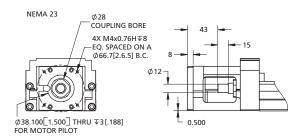


**MODELS ON DEMAND:** Leading edge system for configuring and downloading 3D solid models and 2D drawings.


- Configure a URS to specific requirements including rail length, motor mounting, cover and limit options.
- Rule-based system prevents misconfiguring a model.
- Currently offers fifty-two downloadable CAD formats (3D/2D).
- View 3D model online with zoom, pan and rotate features.
- Real-time downloads (no large emails or FTP sites).

www.DanaherMotion.com/URS

# X34 Flanges

#### URS55

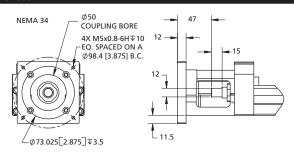

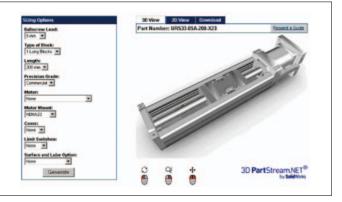



# **STEPPER MOTOR OPTIONS**

#### **SELECTION CHART**


	T12	T12E	T22	T22E	T32	T32E
Motor Flange Reference	NEMA 17	NEMA 17	NEMA 23	NEMA 23	NEMA 34	NEMA 34
Encoder Resolution	-	1000 lines	-	1000 lines	-	1000 lines
Motor Brake Description	-	-	-	-	-	-
URS20						
URS26						
URS33						
URS46						
URS55						

**T12** 







**T12E** 

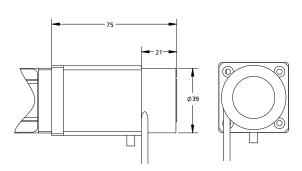

**T22** 

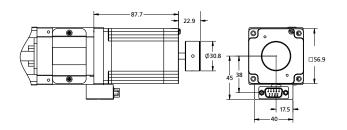

**T22E** 

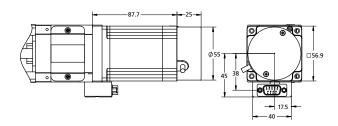




# **STEPPER MOTOR PARAMETERS**

Specification	Units	T12	T22T	T22V	T32
Holding Torque	N-m (oz-in)	0.32 (45)	1.52 (215)	1.52 (215)	8.5 (1206)
Rated Cont. Current/Phase	А	1.2	0.77	0.77	1.58
Phase Inductance (+/- 20%)	mH/phase	2.8	65.5	17	69.2
Weight	kg (lb)	0.35 (0.8)	1.0 (2.3)	1.0 (2.3)	3.81 (8.4)
Rotor Inertia	kg-cm² (lb-in-s²)	0.068 (6.02 x 10 <sup>-5</sup> )	0.408 (3.5 x 10 <sup>-4</sup> )	0.408 (3.5 x 10 <sup>-4</sup> )	.038 (0.268 x 10 <sup>-3</sup> )

#### T32/T32E

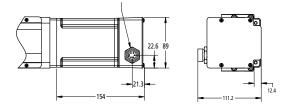




# **SERVO MOTOR OPTIONS**


#### **SELECTION CHART**

	BK11	BK23	BK23B	BK32	BK32B
Motor Flange Reference	NEMA 16	NEMA 23	NEMA 23	NEM A 34	NEMA 34
Encoder Resolution	2048 lines	2048 lines	2048 lines	2048 lines	2048 lines
Motor Brake Description		-	24 VDC Power-off	-	24 VDC Power-off
URS20					
URS26					
URS33	•				
URS46					
URS55		•	•	•	•


# **BK11**

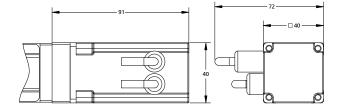

# **BK23**



#### **BK23B**

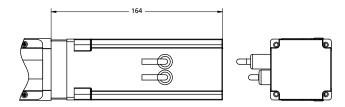





#### **SERVO MOTOR PARAMETERS**


Specification	Units	BK11	BK23	BK23B	BK32	BK32B
Continuous Stall Torque	N-m (oz-in)	0.185 (26)	0.84 (119)	0.83 (117)	3.43 (486)	3.17 (449)
Peak Torque	N-m (oz-in)	0.614 (87)	2.73 (386)	2.73 (386)	11.5 (1629)	11.5 (1629)
Torque Sensitivity +/-10%	N-m/Arms (oz-in/Arms)	0.129 (18.24)	0.61 (86.4)	0.61 (86.4)	0.74 (104)	0.74 (104)
Back EMF +/- 10%	Vrms/krpm	8.3	39	39	47.5	47.5
Maximum Speed	rpm	6000	8000	8000	6000	6000
Weight	kg (lb)	0.35 (0.8)	1.1 (2.4)	1.1 (2.4)	3.39 (7.5)	3.39 (7.5)
Rotor Inertia	kg-cm² (lb-in-s²)	0.017 (1.5 x 10 <sup>-5</sup> )	0.16 (1.4 x 10 <sup>-4</sup> )	0.17 (1.5 x 10 <sup>-4</sup> )	1.5 (1.3 x 10 <sup>-3</sup> )	1.57 (1.31 x 10 <sup>-3</sup> )

#### **BK42**





#### **BK42B**

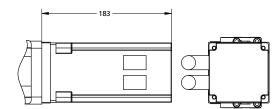

#### **CLEANROOM LUBRICATION OPTION**


The "GK" lubrication option is a low-particulate generating lubricant suitable for cleanroom applications, with the same lubrication and rust-preventing performance as the standard lithium-based grease. Operating range is –30oC to 150 oC.

#### RAYDENT SURFACE TREATMENT OPTION

The "RD" option provides for Raydent treatment of the rail surfaces. Raydent is a proven, precisely applied thin rust-preventing film. The surface treatment has exceptional durability (greater than 10 years), and any fine grains of Raydent that do break away from the contact between the rail and recirculating ball will actually add to the lubricity of the grease.


# **SENSOR OPTIONS**


All URS models are offered with optional Limit and home Sensor packages. Sensors are recommended to prevent overtravel of the carriage and to provide a reliable index position. Each sensor package includes a T-slotted mounting rail and three (3) sensors. The Sensors are adjustable throughout the full travel range of the URS.




Sensor Type	Photoelectric		
Output Logic Type	NPN (sinking)		
Switch Type	Normally Open		
Input Voltage	5 - 24 VDC +/-10%		
Current Capacity	100mA		
Repeatability	+/-15 microns		


#### **URS20**

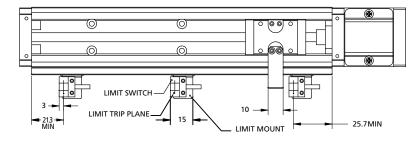



#### URS26

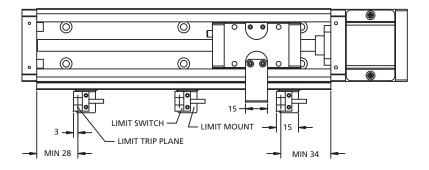









URS Series IDC Page Title

#### URS33

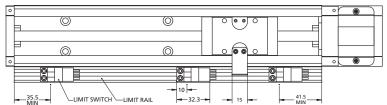











#### **URS46**

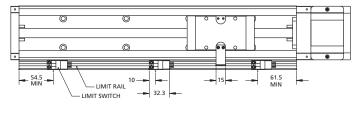


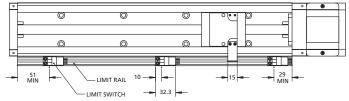



#### URS55







# **INERTIA OF THE CARRIAGES(S) AND BALLSCREW**

			without 1	top-cover			with to	op-cover		
base	rail length	Long ca	rriage (s)		arriage(s)	Long car	rriage (s)	Short Ca	arriage(s)	rail Length
model	(mm)	single [A]	dual [B]	single [C]	dual [D]	single [A]	dual [B]	single [C]	dual [D]	mm
	100	1.36	_	_	_	0.017	_	_	_	100
URS2001	150	0.020	_	_	_	0.021	_	_	_	150
	200	0.028	0.030	_	_	0.029	0.031	_	_	200
	450	0.000	0.000			0.000	0.000	<u> </u>		450
LIDESCOS	150	0.036	0.038	_		0.036	0.039		_	150
URS2602	200	0.043	0.000	_	_	0.044	0.046	_	_	200
	250	0.022	0.030	_	_	0.025	0.035		_	250
	300	0.026	0.034	_		0.029	0.039	_	_	300
	150	0.016	_	0.016	0.016	0.017	_		_	150
	200	0.020	_	0.019	0.020	0.021	_	0.020	0.021	200
URS3305	300	0.028	0.030	0.027	0.028	0.029	0.031	0.027	0.029	300
01.55555	400	0.036	0.038	0.035	0.036	0.036	0.039	0.035	0.036	400
	500	0.043	0.045	0.042	0.043	0.044	0.046	0.043	0.044	500
	600	0.022	0.030	0.018	0.022	0.025	0.035	0.020	0.025	600
	150	0.022	0.030	0.018	0.022	0.025	0.035	0.020	0.025	150
	200	0.026	0.034	0.022	0.026	0.029	0.039	0.023	0.029	200
URS3310	300	0.034	0.041	0.030	0.034	0.036	0.046	0.031	0.036	300
	400	0.041	0.049	0.038	0.041	0.044	0.054	0.039	0.044	400
	500	0.049	0.057	0.045	0.049	0.052	0.062	0.046	0.052	500
	600	0.179	0.202	0.169	0.182	0.187	0.217	0.174	0.192	600
	340	0.179	0.202	0.169	0.182	0.187	0.217	0.174	0.192	340
	440	0.218	0.241	0.208	0.220	0.225	0.256	0.213	0.231	440
	540	0.257	0.279	0.246	0.259	0.264	0.295	0.252	0.269	540
URS4620	640	0.295	0.318	0.285	0.298	0.303	0.333	0.290	0.308	640
	740	0.334	0.357	0.324	0.337	0.342	0.372	0.329	0.347	740
	840	0.247	0.339	0.207	0.258	0.278	0.399	0.227	0.298	840
	940	0.286	0.377	0.246	0.296	0.317	0.438	0.266	0.337	940
	340	0.247	0.339	0.207	0.258	0.278	0.399	0.227	0.298	340
	440	0.286	0.377	0.246	0.296	0.317	0.438	0.266	0.337	440
	540	0.325	0.416	0.284	0.335	0.355	0.477	0.305	0.376	540
URS4610	640	0.364	0.455	0.323	0.374	0.394	0.516	0.344	0.414	640
	740	0.403	0.494	0.362	0.413	0.433	0.555	0.382	0.453	740
	840	1.462	1.635	_	_	1.523	1.756	_	_	840
	940	1.585	1.757	_	_	1.646	1.879	_	_	940
	980	1.462	1.635		_	1.523	1.756		_	980
	1080	1.585	1.757		_	1.646	1.879		_	1080
URS5520	1180	1.707	1.880	_	_	1.768	2.001		_	1180
	1280	1.830	2.002	_	_	1.891	2.124		_	1280
	1380	1.953	2.125	_	_	2.013	2.246	_	_	1380

[A], [B], [C], [D] Represents carriage option.



# **ACCURACY STANDARDS**

#### **Positioning Repeatability:**

Establish an arbitrary point. From one end, position the inner block at this point and measure the stop position. Repeat the positioning and measure the stop position. Repeat the positioning and measurement process 7 times. Repeat the same process with respect to the established set point a the midpoint and near both ends of travel. Take the maximum measurement and divide the maximum difference by 2 and indicate it with either a positive or negative sign as the test result.

Positioning Repeatability=

 $\pm 1/2$  {(Maximum value of  $\mathcal{Q}$  n)-Minimum value of  $\mathcal{Q}$  n)}

#### **Positioning Accuracy:**

Positioning is performed in only one direction and the resulting position is set as the reference measurement point. Calculate the difference between the length of actual travel and the commanded travel length. continuing in the same direction (without returning to the start point) repeat this process randomly several times until reaching limit of full stroke. Express the accuracy by the absolute maximum difference.

Positioning Accuracy =  $(\Delta \ell n)$ max


### **Running Parallelism:**


Making sure that the surface plate is absolutely flat. Use the test indicator as shown in at the right, run the block over the entire length of travel and use the maximum difference in readings as the test results.


#### Backlash:


Use the feed screw to move the block a little. Take the text indicator reading and make it the reference point. While in this position, load the block in the same direction without using the feed screw. Release the load and read the return. Calculate the difference between the reference point. Repeat the same process at the midpoint and near both ends. Use the maximum difference as the test result.

Backlash -  $(\Delta \ell)$ max

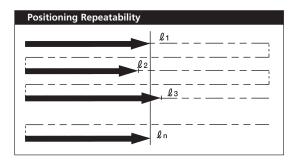

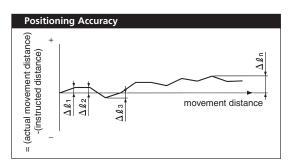

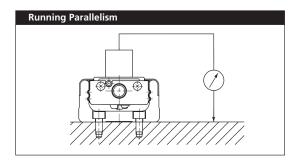

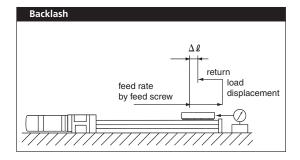



#### **RATED LIFE**

To obtain the rated life of the URS actuator, complete the following life calculation equations for the Guide portion (A) and the Ball Screw / Support Bearing portion (B) and use the minimum value as your rated life.

#### A. Life of the Guide

Life of the guide is calculated as follows:

equation (1)

$$L_G = \left(\frac{f_C}{f_W} \cdot \frac{C}{P_T}\right)^3.50$$

L<sub>G</sub>: Life in distance (Km) Fc: Contact coefficient (See Table 1)

Fw: Load coefficient (See Table 2)

C: Basic dynamic rating (N)

Pt: Calculated load carried by single block (N)

#### A-1 Calculation of Pt

To calculate the life by using equation (1) for  $P_T$ , it is necessary to obtain theoretical load on single carriage by taking the actual moment load and other factors into consideration. When high acceleration or short stroke motion is present,  $P_T$  should be calculated with acceleration in consideration. This calculation for acceleration is performed with the mass carried by the URS actuator.

To obtain  $P_T$ , calculate each load at uniform motion, acceleration motion, and deceleration motion. The average value is  $P_T$ .


Table 1 Contact coefficient (fc)	
number of blocks to be mounted on an axis	contact coefficient (fc)
1	1
2	0.81

Table 2 Load coefficient (fw)						
Operatin	g condition	Load coefficient (fw)				
vibration	speed					
none	5m/min or less	1.0 ~ 1.5				
minor	0m/min or less	1.5 ~ 2.0				
maior	m/min or more	2.0 ~ 3.5				

Table 3 Equivale	Table 3 Equivalent coefficient of the moment						
	kp	ky	kr				
URS20**A	2.16 x10 <sup>-1</sup>	1.82 x10 <sup>-1</sup>	7.84 x 10 <sup>-2</sup>				
URS20**B	3.56 x10 <sup>-2</sup>	2.99 x10 <sup>-2</sup>	3.92 x10 <sup>-2</sup>				
URS26**A	1.41 x10⁻¹	1.18 x10 <sup>-1</sup>	5.85 x10 <sup>-2</sup>				
URS26**B	2.34 x10 <sup>-2</sup>	1.96 x10 <sup>-2</sup>	2.92 x10 <sup>-2</sup>				
URS33**A	1.18 x10 <sup>-1</sup>	9.90 x10 <sup>-2</sup>	4.84 x 10 <sup>-2</sup>				
URS33**B	1.96 x10 <sup>-2</sup>	1.65 x10 <sup>-2</sup>	2.42 x10 <sup>-2</sup>				
URS33**C	2.36 x10 <sup>-1</sup>	2.02 x10 <sup>-1</sup>	4.83 x10 <sup>-2</sup>				
URS33**D	3.93 x10 <sup>-2</sup>	3.37 x10 <sup>-2</sup>	2.41 x10 <sup>-2</sup>				
URS46**A	7.87 x10 <sup>-2</sup>	6.61 x10 <sup>-2</sup>	3.19 x 10 <sup>-2</sup>				
URS46**B	1.31 x10 <sup>-2</sup>	1.10 x10 <sup>-2</sup>	1.60 x 10 <sup>-2</sup>				
URS46**C	1.57 x10⁻¹	1.33 x10 <sup>-1</sup>	3.19 x10 <sup>-2</sup>				
URS46**D	2.62 x10 <sup>-2</sup>	2.22 x10 <sup>-2</sup>	1.60 x10 <sup>-2</sup>				
URS55**A	6.75 x10 <sup>-2</sup>	5.69 x10 <sup>-2</sup>	2.75 x10 <sup>-2</sup>				
URS55**B	1.12 x10 <sup>-2</sup>	9.48 x10 <sup>-3</sup>	1.38 x 10 <sup>-2</sup>				

#### i) At uniform motion ( $P_{TC}$ )

equation (2)  $P_{TC} = \left(\frac{1}{n} \cdot W\right) + \left(kp \cdot Mp\right) + \left(ky \cdot My\right) + \left(kr \cdot Mr\right)$ 



#### ii) At uniform motion ( $P_Ta$ )

equation (3)

$$P_{Ta} = \frac{1}{n} \cdot W + kp \left( Mp + m \cdot \alpha_a \cdot Z \right) + ky \left( My + m \cdot \alpha_a \cdot X \right) + kr \cdot Mr$$

However, when the value of (M  $_{\rm P}+$  m  $.\alpha a.Z),$  (M  $_{\rm y}$  +m. $\alpha a.X) is negative, mark it zero.$ 

#### iii) At deceleration motion (P<sub>T</sub>d)

equation (4

$$P_{Td} = \frac{1}{n} \cdot W + kp \left( Mp + m \cdot - \alpha_a \cdot Z \right) + ky \left( My + m \cdot - \alpha_a \cdot X \right) + kr \cdot Mr$$

However, when the value of (M<sub>P</sub>+m  $\cdot$  –  $\alpha$ a·Z), (M<sub>y</sub> +m  $\cdot$  –  $\alpha$ a·X) is negative, market zero.

P<sub>Tc</sub>: Calculated load carried by single block at uniform motion (N)

P<sub>Ta</sub>: Calculated load carried by single block at acceleration motion (N)

P<sub>Td</sub>: Calculated load carried by single block at deceleration motion (N)

n: Number of carriges(s) on URS actuator

W: Load(N)

M: Mass carried by the actuator

αa: Acceleration (m/sec²)

lphad: Deceleration (m/sec²)


- Distance from the center of URS Actuator to center of gravity of the mass (MM)
- Distance from the center or ball screw in URS actuator to the center of gravity of the mass (mm)
- kp: Equivalent coefficient of the moment at pitching direction (see Table 3)
- ky: Equivalent coefficient of the moment at yawing direction (See Table 3)
- kr: Equivalent coefficient of the moment at rolling direction (See Table 3)
- Mp: Load moment at pitching direction (Nmm)
- My: Load moment at yawing direction (Nmm)
- Mr: Load moment at rolling direction (Nmm)

Using the above factors to calculate average load, obtain the theoretical load carried by single carriage  $(P_T)$ .

equation (5)

$$P_{T} = \sqrt[3]{\frac{1}{\left(S1 + S2 + S3\right)} \left(P_{Ta}^{-3} \cdot S1 + P_{Tc}^{-3} \cdot S2 + P_{Td}^{-3} \cdot S3\right)}$$

Figure (1)



- Pr: Calculated load carried by single carriage (N)
- S1: Travel distance at acceleration motion (mm) (See Fig. 1)
- S1: Travel distance at uniform motion (mm) (See Fig. 1)
- S1: Travel Distance at decelerating motion (mm) (See Fig. 1)
- P<sub>Ta</sub>: Calculated load carried by single carriage at acceleration motion (N)—Equation (3)
- P. Calculated load carried by single carriage at uniform motion (N)—Equation (2)
- $P_{Td}$ : Calculated load carried by single carriage at deceleration motion (N)— Equation (4)
- B. Life of the Ball Screw and Support Bearing Calculations of life for Ball Screw and Support Bearing are performed by common equation as introduced hereunder. Compare the dynamic load rating of Ball Screw and that of Support Bearing and use the lesser value for life calculation.

$$L_a = \left(\frac{1}{f_w} \cdot \frac{Ca \ or \ Cb}{P_a}\right)^3 \cdot \gamma$$

- Fg: Load coefficient (See Table 2)
- Ca: Basic Dynamic load rating of ball screw (N)
- Cb: Basic dynamic load rating of support bearing (N)
- Pa: Load at axis direction (N)
- γ: Lead of Ball Screw (mm)

#### B-1. Calculation of Pa

To calculate life by using equation (6), perform calculation for Pa with acceleration in consideration. Calculate the load at axis direction for each case at uniform motion. acceleration motion, and deceleration motion. Then obtain the average load of Pa.

#### i) At uniform motion (Pac)

$$P_{ac} = \mu \cdot W + F + f_h \cdot n$$

#### ii) At acceleration motion (Paa)

$$P_{ac} = \mu \cdot W + F + f_b \cdot n + (m + m_b \cdot n) \alpha_a$$

#### iil) At acceleration motion (Pad)

#### eauation (9)

$$P_{ad} = \mu \cdot W + F + f_b \cdot n - (m + m_b \cdot n) \alpha_d$$

Pac: Basic load rating at axis direction at uniform motion (N)

Paa: Basic load rating at axis direction at acceleration motion (N)

Pad: Basic load rating at axis direction at deceleration motion (N)

- μ: Frictional coefficient (0.006)
- W: Load applied on block (N)
- External force (load) on axis direction (N)
- fb: Sliding resistance of single carriage (N) (See Table S-2)
- n: Number of carriage(s) on URS actuator
- m: Mass carried by the actuator (Kg)
- m<sub>b</sub>: Mass of the carriage of URS actuator (kg) (See "Moving Mass" specifications on page 4-5)
- αa: Acceleration (m/sec²)
- αa: Deceleration (m/sec2)

URS46

URS55

#### Table 4 Sliding resistance of single black (fb) (Rolling resistance + Seal resistance) Unit:N Commercial grade precision grade (P) URS20 2.3 4.9 URS26 5.4 9.8 URS33 44 10.2

7.4

9 0

13.3

16.0

Hence, the average axis directional load (P) would be obtained.

equation (10)
$$P_{a} = \sqrt[3]{\frac{1}{(S1 + S2 + S3)} (|P_{aa}|^{3} \cdot S1 + |P_{ac}|^{3} \cdot S2 + |P_{ad}|^{3} \cdot S3)}$$

- Pa: Average axis directional load (N)
- S1: Travel distance at acceleration motion (mm) (See Fig. 1)
- Travel distance at uniform motion (mm) (See Fig. 1)
- S3: Travel distance at deceleration motion (mm) (See Fig. 1)
- Paa: Axis direction load at acceleration motion (N) Equation (8)
- Pac: Axis direction load at uniform motion (N) Equation (7) Pad: Axis directional load at deceleration motion (N) - Equation (9)

# PART NUMBERING/ORDERING INFORMATION

Base Unit	Ballscrew Lead	Carriage Type	Rail Length	Grade	Motor or Motor Flange	Cover Option	Sensor Option	Surface & Lube Options
URS20	01	Α	100	Р	X17	Н	S	GKRD
1	2	3	4	5	6	7	8	9
URS20 AVAIL	URS20 AVAILABLE CONFIGURATIONS							
URS20	01 05	A B	100 150 200	(none) P	X16 X17 T12E BK11	(none) H	(none) S	(none) GK GKRD
URS26 AVAIL	ABLE CONFIGU	JRATIONS						
URS26	02 05	A B	150 200 250 300	(none) P	X16 X17 T12 T12E BK11	(none) H	(none) S	(none) GK RD GKRD
URS33 AVAIL	ABLE CONFIGU	JRATIONS						
URS33	05 10	A B C D	150 200 300 400 500 600	(none) P	X16 X17 X23 T12 T12E T22 T22E BK11 BK23 BK23B	(none) H	(none) S	(none) GK RD GKRD
URS46 AVAIL	ABLE CONFIGU	JRATIONS						
URS46	10 20	A B C D	340 440 540 640 740 840 940	(none) P	X23 T22 T22E BK23 BK23B	(none) H	(none) S	(none) GK RD GKRD
URS55 AVAIL	ABLE CONFIGU	JRATIONS						
URS55	20	A B	980 1080 1180 1280 1380	(none) P	X23 X34 T22 T22E T32E BK23 BK23B BK23B BK42B	(none) H	(none) S	(none) GK RD GKRD



#### **CONFIGURATION GUIDE**

1. Base Un	it
URS20	Base rail profile = 20mm tall x 40mm wide
URS26	Base rail profile = 26mm tall x 50mm wide
URS33	Base rail profile = 33mm tall x 60mm wide
URS46	Base rail profile = 46mm tall x 86mm wide
URS55	Base rail profile = 55mm tall x 100mm wide

2. Ballscrew Lead			
01	1mm lead ballscrew		
02	2mm lead ballscrew		
05	5mm lead ballscrew		
10	10mm lead ballscrew		
20	20mm lead ballscrew		

3. Carriage	туре
Α	Single long (standard) carriage
В	Dual long (standard) carriages
С	Single short carriage
D	Dual short carriages

4. Rail Length		
S	pecified in mm.	Refer to Specifications for allowable travel

5. Grade	
С	Commercial grade
P	Precision grade

6. Motor or Motor Flange		
X16	Motor flange for 16 Frame motor	
X17	Motor flange for 17 Frame motor	
X23	Motor flange for 23 Frame motor	
X34	Motor flange for 34 Frame motor	
T12	Stepper motor, 17 Frame	
T12E	Stepper motor, 17 Frame with encoder	
T22	Stepper motor, 23 Frame	
T22E	Stepper motor, 23 Frame with encoder	
T32	Stepper motor, 34 Frame	
T32E	Stepper motor, 34 Frame with encoder	
BK12	Brushless servo motor, 16 Frame with encoder	
BK22	Brushless servo motor, 23 Frame with encoder	
BK22B	Brushless servo motor, 23 Frame with encoder & brake	
BK32	Brushless servo motor, 34 Frame with encoder	
BK32B	Brushless servo motor, 34 Frame with encoder & brake	

7. Cover C	ver Option	
(none)	No cover provided	
С	Cover provide with auxiliary carriage plate	

8. Sensor	. Sensor Option	
(none)	No cover provided	
Н	Hard cover provide with auxiliary carriage plate	

9. Surface	9. Surface Treatment & Lube Options	
(none)	No additional options provided	
GK	Cleanroom (low-particulate) lubrication	
RD	Raydent treatment of rail surfaces	
GKRD	GK & RD options (described above)	

#### **LUBRICATION AND OPERATION TEMPERATURE**

- The URS contains a lithium-soap based grease. Apply similar grade of grease for lubrication as required depending on your terms of operation.
- Use grease fitting to lubricate the guide block. For ball screw apply grease directly to surface of screw shaft
- Unless otherwise instructed, a grease fitting is located as shown
- The recommended ambient working temperature is 80°C or lower. Apply 55°C or lower for sensor option type.

