

10 - **4** - **4** - **02** - **CP0** - **1** - **S114** - **M02** - **C145** - **L01** - **E00** - **B00**

Table Series

Number of Bearings

- 2** - 2 bearing per carriage
- 4** - 4 bearings per carriage

Carriage Length

- 4** - 4 inches

Travel Length (see pages C-6, C-8 & C-10)

- 02** - 2 to 60 inches

Cover Plate

- CP0** - no cover plates
- CP1** - top cover plate only
- CP2** - top & side cover plates

Carriage Inserts (see pages C-7, C-9 & C-11)

- 1** - English mount
- 2** - Metric mount

Screw Options (see pages C-18 to C-23)

<i>Rolled ball screws</i>	<i>Precision ball screws</i>	<i>Ground ball screws</i>
S001 - .500 x .500 NPL	S114 - .625 x .200 NPL	S212 - .625 x .200 PL
S002 - .500 x .500 PL	S115 - .625 x .200 PL	S213 - .625 x .500 PL
S003 - .500 x .500 NPL(T)	S116 - 16 x 5 NPL	S214 - 16 x 5 PL
S004 - .500 x .500 PL(T)	S117 - 16 x 5 PL	S215 - 16 x 16 PL
S005 - .625 x .200 NPL	S118 - 16 x 10 NPL	
S006 - .625 x .200 PL	S119 - 16 x 10 PL	<i>Rolled acme screws</i>
S007 - .625 x .200 NPL(T)	S120 - 16 x 16 NPL	S300 - .625 x .100 NPL
S008 - .625 x .200 PL(T)	S121 - 16 x 16 PL	S301 - .625 x .100 PL
S009 - .625 x 1.000 NPL		S302 - .625 x .200 NPL
S010 - .625 x 1.000 PL		S303 - .625 x .200 PL
S011 - .625 x 1.000 NPL(T)		S304 - 16 x 4 NPL
S012 - .625 x 1.000 PL(T)	S999 - other	S305 - 16 x 4 PL

Motor Mount (see pages C-7, C-9, C-11, C-46 & C-47)

- M00** - none
- M01** - hand crank
- M99** - other
- M02** - NEMA 23 mount (E)
- M03** - NEMA 23 mount (M)
- M04** - NEMA 34 mount (E)
- M05** - NEMA 34 mount (M)
- M06** - NEMA 23 (RH) wrap
- M07** - NEMA 23 (LH) wrap
- M08** - NEMA 34 (RH) wrap
- M09** - NEMA 34 (LH) wrap

Coupling Options (see pages C-40 to C-41)

- C000** - none
- C999** - other
- C020 to C024** - C100
- C040 to C047** - C125
- C125 to C129** - H100
- C145 to C154** - H131
- C400 to C406** - G100
- C425 to C434** - G126

Limit & Home Switches (see pages C-37 to C-39)

L00 - no switches		Mechanical	Reed	Hall	Prox (NPN)	Prox (PNP)
L99 - other	EOT & home switches	L01	L04	L07	L10	L13
	EOT switches only	L02	L05	L08	L11	L14
	home switch only	L03	L06	L09	L12	L15

Encoder Options (see page C-49)

- E00** - none
- E01** - rotary (500 lines/rev)
- E02** - rotary (1000 lines/rev)
- E03** - rotary (1270 lines/rev)
- E10** - linear (2500 lines/inch)
- E11** - linear (125 lines/mm)
- E99** - other

Power-off Brakes (see page C-48)

- B00** - none
- B01** - 24 VDC
- B02** - 90 VDC
- B99** - other



Toll Free Phone (877) SERV098

Toll Free Fax (877) SERV099

www.electromate.com

sales@electromate.com

- (E) - English Interface
- (LH) - Left Hand
- (M) - Metric Interface
- (NPL) - Non Preloaded
- (PL) - Preloaded
- (RH) - Right Hand
- (T) - Turcite Nut

Specifications

Load Capacities		Two (2) Bearing Carriage		Four (4) Bearing Carriage	
Dynamic Horizontal	2 million inches (50 km) of travel	1,550 lbs	(703 kg)	3,100 lbs	(1406 kg)
Dynamic Horizontal	50 million inches (1270 km) of travel	525 lbs	(238 kg)	1,060 lbs	(480 kg)
Static Horizontal		2,360 lbs	(1070 kg)	4,720 lbs	(2140 kg)
Dynamic Roll Moment	2 million inches (50 km) of travel	140 ft-lbs	(190 N-m)	280 ft-lbs	(379 N-m)
Dynamic Roll Moment	50 million inches (1270 km) of travel	47 ft-lbs	(64 N-m)	95 ft-lbs	(129 N-m)
Static Roll Moment		210 ft-lbs	(285 N-m)	425 ft-lbs	(576 N-m)
Dyn. Pitch & Yaw Moment	2 million inches (50 km) of travel	18 ft-lbs	(24 N-m)	240 ft-lbs	(325 N-m)
Dyn. Pitch & Yaw Moment	50 million inches (1270 km) of travel	6 ft-lbs	(8 N-m)	82 ft-lbs	(111 N-m)
Static Pitch & Yaw Moment		30 ft-lbs	(41 N-m)	365 ft-lbs	(495 N-m)
Each Bearing Dyn. Capacity	2 million inches (50 km) of travel	775 lbs	(351 kg)	775 lbs	(351 kg)
Each Bearing Dyn. Capacity	50 million inches (1270 km) of travel	263 lbs	(119 kg)	263 lbs	(119 kg)
Each Bearing Static Load Capacity		1,180 lbs	(535 kg)	1,180 lbs	(535 kg)
Thrust Force Capacity	10 million screw revolutions	665 lbs	(302 kg)	665 lbs	(302 kg)
Thrust Force Capacity	500 million screw revolutions	180 lbs	(82 kg)	180 lbs	(82 kg)
Maximum Acceleration		386 in/sec ²	(9,8 m/sec ²)	772 in/sec ²	(19,6 m/sec ²)
d₁	Center to center distance (spread) between the two rails	2.375 in	(60,3 mm)	2.375 in	(60,3 mm)
d₂	Center to center distance (spacing) of the bearings on a single rail	-		2.088 in	(53,0 mm)
d_r	CP0 version Center distance of the bearing to top of carriage plate surface	.750 in	(19,1 mm)	.750 in	(19,1 mm)
d_r	CP1 version Center distance of the bearing to top of carriage plate surface	1.375 in	(34,9 mm)	1.375 in	(34,9 mm)

Other	For Two (2) & Four (4) Bearing Carriages
Table Material	Base, Carriage, End Plates, & Cover Plate option - 6061 anodized aluminum
Linear Rail Material	Stainless Steel
Screw Material (see pages C-18 to C-23)	Acme Screw - Stainless Steel
Screw Material (see pages C-18 to C-23)	Rolled Ball, Precision Ball, & Ground Ball - Case Hardened Steel
Straightness	<0.00013 in/in (< 3,30 microns/25mm)
Flatness	<0.00013 in/in (< 3,30 microns/25mm)
Orthogonality (multi-axis systems)	< 30 arc-seconds
Friction Coefficient	< 0.01
Motor Mount	NEMA 23 & 34 Mounts, Metric Mounts, Motor Wraps, and Hand Crank Option
Coupling	Three (3) different styles available

Dimensions & Specifications

- Without Cover Plates -

Model Number	Travel Length inches (mm)	Table Dimensions inches (mm)		Mounting Dimensions inches (mm)				Screw Length inches (mm)	Table (1) Weight lbs (kg)
		A	B	C	D	E	M		
10x402-CP0	2 (50)	6.0 (152,4)	9.875 (250,8)	0.500 (12,7)	1.250 (31,7)	1	8	9.25 (235)	5.1 (2,3)
10x404-CP0	4 (100)	8.0 (203,2)	11.875 (301,6)	0.250 (6,3)	2.500 (63,5)	1	8	11.25 (286)	5.9 (2,7)
10x406-CP0	6 (150)	10.0 (254,0)	13.875 (352,4)	1.250 (31,7)	2.500 (63,5)	1	8	13.25 (337)	6.7 (3,0)
10x408-CP0	8 (200)	12.0 (304,8)	15.875 (403,2)	0.250 (6,3)	2.000 (50,8)	3	12	15.25 (387)	7.5 (3,4)
10x412-CP0	12 (300)	16.0 (406,4)	19.875 (504,8)	0.250 (6,3)	1.500 (38,1)	5	16	19.25 (489)	9.1 (4,1)
10x416-CP0	16 (405)	20.0 (508,0)	23.875 (606,4)	1.250 (31,7)	2.500 (63,5)	5	16	23.25 (591)	10.7 (4,8)
10x420-CP0	20 (505)	24.0 (609,6)	27.875 (708,0)	0.750 (19,0)	2.500 (63,5)	7	20	27.25 (692)	12.3 (5,6)
10x424-CP0	24 (605)	28.0 (711,2)	31.875 (809,6)	0.250 (6,3)	2.500 (63,5)	9	24	31.25 (794)	13.9 (6,3)
10x430-CP0	30 (760)	34.0 (863,6)	37.875 (962,0)	0.750 (19,0)	2.500 (63,5)	11	28	37.25 (946)	16.3 (7,4)
10x436-CP0	36 (910)	40.0 (1016,0)	43.875 (1114,4)	1.250 (31,7)	2.500 (63,5)	13	32	43.25 (1099)	18.7 (8,5)
10x442-CP0	42 (1060)	46.0 (1168,4)	49.875 (1266,8)	1.750 (44,4)	2.500 (63,5)	15	36	49.25 (1251)	21.1 (9,6)
10x448-CP0	48 (1215)	52.0 (1320,8)	55.875 (1419,2)	2.250 (57,1)	2.500 (63,5)	17	40	55.25 (1403)	23.5 (10,6)
10x454-CP0	54 (1370)	58.0 (1473,2)	61.875 (1571,6)	0.250 (6,3)	2.500 (63,5)	21	48	61.25 (1556)	25.9 (11,4)
10x460-CP0	60 (1520)	64.0 (1625,6)	67.875 (1724,0)	0.750 (19,0)	2.500 (63,5)	23	52	67.25 (1708)	28.3 (12,8)


- x = 2; Carriage has 2 bearings; Carriage weight = 1.2 lbs. (0,54 kg)
- x = 4; Carriage has 4 bearings; Carriage weight = 1.4 lbs. (0,63 kg)

Footnotes:

(1) Weight shown is with a 0.625 inch (16 mm) diameter screw, a 2 bearing carriage [1.2 lbs (0,54 kg)], a NEMA 23 motor mount [0.34 lbs (0,16 kg)], and a C100 style [0.09 lbs (0,04 kg)] coupling. When using a 0.500 inch diameter screw subtract 0.022 lbs per inch (0,00039 kg per mm) of screw length for a given model number. When using a 4 bearing carriage add 0.2 lbs (0,09 kg) to each value.

Dimensions

- Without Cover Plates -

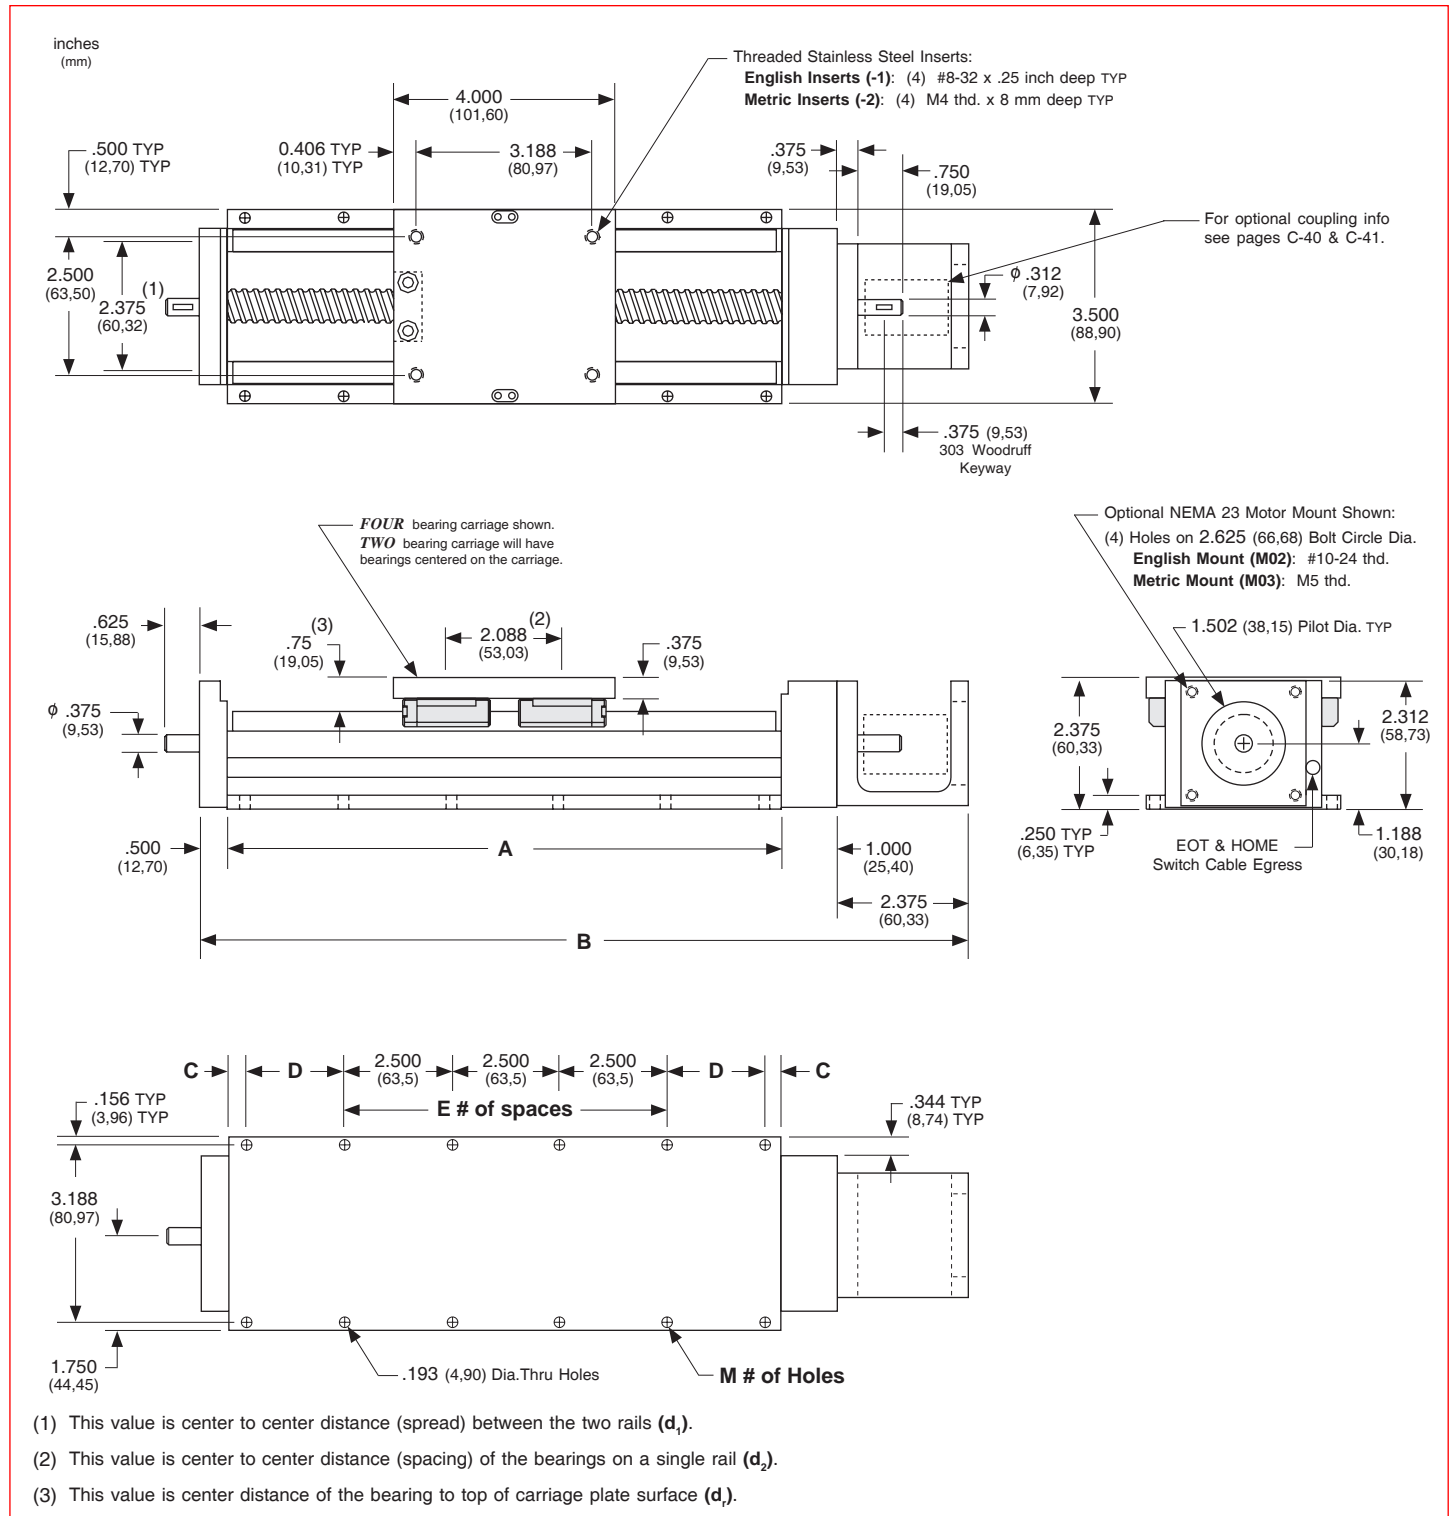

Note: Any 100, 110, 120 or 130 series table can be mounted on top of any second 100, 110, 120 series table by the user, in order to create X-Y multiple axis configurations. The 100-CP1, 100-CP2, or 120 series tables require one of the *Carriage Adapter Plate* options. The carriage's threaded stainless steel insert hole pattern exactly matches the base mounting hole pattern on each table, therefore no extra adapter bracket or machining is required. However a precision square tool, or micrometer depth gauge, is required in order to obtain an orthogonality between the two tables of < 30 arc-seconds. The table base, carriage top & carriage sides are all precision machined. *LINTECH's* 100 series, 4 bearing carriage, should be used for the bottom axis in a multiple axes application for better system rigidity, performance, and life.

Dimensions & Specifications

- With Top Cover Plate Only -

Model Number	Travel Length inches (mm)	Table Dimensions inches (mm)		Mounting Dimensions inches (mm)				Screw Length inches (mm)	Table (1) Weight lbs (kg)
		A	B	C	D	E	M		
10x402-CP1	2 (50)	6.0 (152,4)	9.875 (250,8)	0.500 (12,7)	1.250 (31,7)	1	8	9.25 (235)	6.1 (2,8)
10x404-CP1	4 (100)	8.0 (203,2)	11.875 (301,6)	0.250 (6,3)	2.500 (63,5)	1	8	11.25 (286)	7.0 (3,2)
10x406-CP1	6 (150)	10.0 (254,0)	13.875 (352,4)	1.250 (31,7)	2.500 (63,5)	1	8	13.25 (337)	7.9 (3,6)
10x408-CP1	8 (200)	12.0 (304,8)	15.875 (403,2)	0.250 (6,3)	2.000 (50,8)	3	12	15.25 (387)	8.8 (4,0)
10x412-CP1	12 (300)	16.0 (406,4)	19.875 (504,8)	0.250 (6,3)	1.500 (38,1)	5	16	19.25 (489)	10.6 (4,8)
10x416-CP1	16 (405)	20.0 (508,0)	23.875 (606,4)	1.250 (31,7)	2.500 (63,5)	5	16	23.25 (591)	12.3 (5,6)
10x420-CP1	20 (505)	24.0 (609,6)	27.875 (708,0)	0.750 (19,0)	2.500 (63,5)	7	20	27.25 (692)	14.0 (6,3)
10x424-CP1	24 (605)	28.0 (711,2)	31.875 (809,6)	0.250 (6,3)	2.500 (63,5)	9	24	31.25 (794)	15.9 (7,2)
10x430-CP1	30 (760)	34.0 (863,6)	37.875 (962,0)	0.750 (19,0)	2.500 (63,5)	11	28	37.25 (946)	18.6 (8,4)
10x436-CP1	36 (910)	40.0 (1016,0)	43.875 (1114,4)	1.250 (31,7)	2.500 (63,5)	13	32	43.25 (1099)	21.3 (9,7)
10x442-CP1	42 (1060)	46.0 (1168,4)	49.875 (1266,8)	1.750 (44,4)	2.500 (63,5)	15	36	49.25 (1251)	24.0 (10,9)
10x448-CP1	48 (1215)	52.0 (1320,8)	55.875 (1419,2)	2.250 (57,1)	2.500 (63,5)	17	40	55.25 (1403)	26.7 (12,1)
10x454-CP1	54 (1370)	58.0 (1473,2)	61.875 (1571,6)	0.250 (6,3)	2.500 (63,5)	21	48	61.25 (1556)	29.4 (13,3)
10x460-CP1	60 (1520)	64.0 (1625,6)	67.875 (1724,0)	0.750 (19,0)	2.500 (63,5)	23	52	67.25 (1708)	32.1 (14,6)


- x = 2; Carriage has 2 bearings; Carriage weight = 1.5 lbs. (0,68 kg)
- x = 4; Carriage has 4 bearings; Carriage weight = 1.7 lbs. (0,77 kg)

Footnotes:

- (1) Weight shown is with a 0.625 inch (16 mm) diameter screw, a 2 bearing carriage [1.5 lbs (0,68 kg)], a NEMA 23 motor mount [0.34 lbs (0,16 kg)], and a C100 style [0.09 lbs (0,04 kg)] coupling. When using a 0.500 inch diameter screw subtract 0.022 lbs per inch (0,00039 kg per mm) of screw length for a given model number. When using a 4 bearing carriage add 0.2 lbs (0,09 kg) to each value.

Dimensions

- With Top Cover Plate Only -

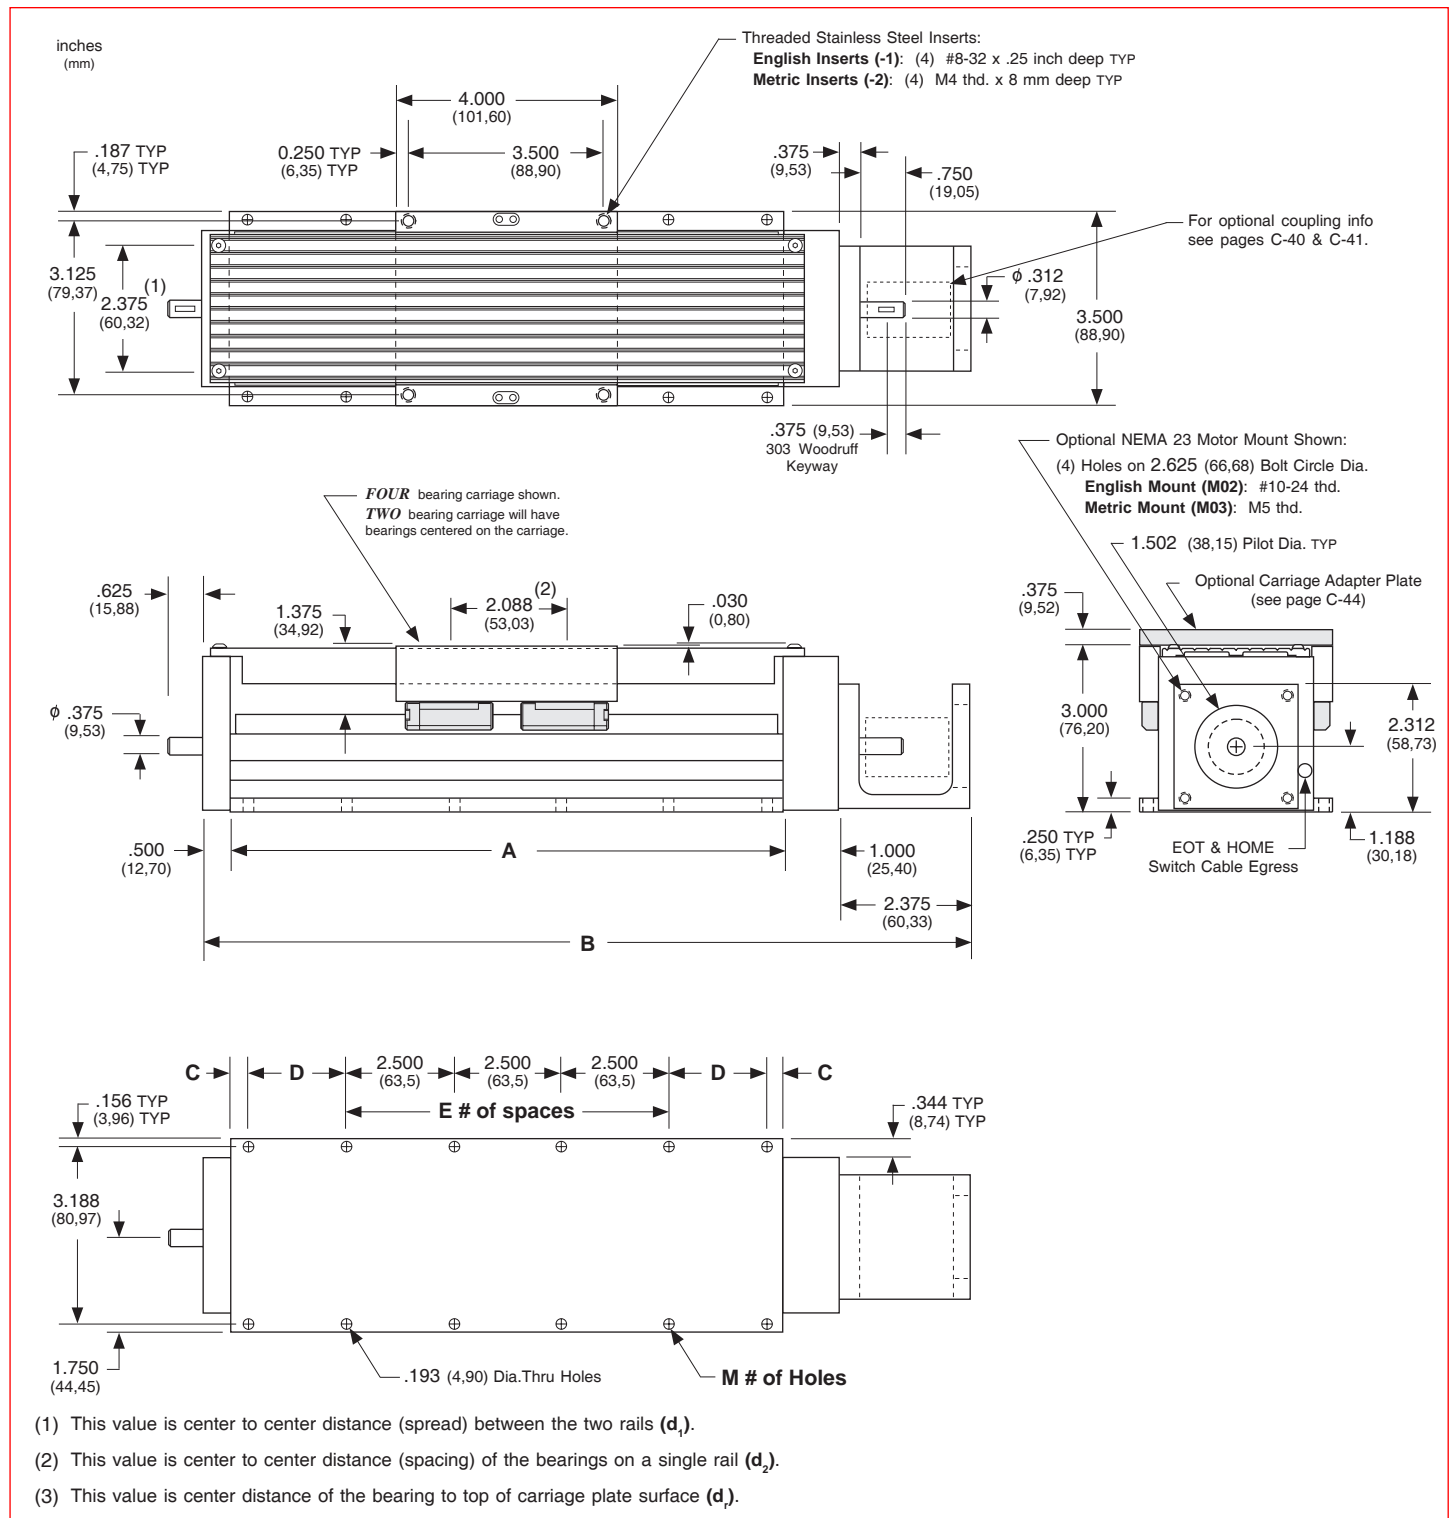

Note: Any 100, 110, 120, or 130 series table can be mounted on top of any second 100, 110, 120 series table by the user, in order to create X-Y multiple axis configurations. The 100-CP1, 100-CP2, or 120 series tables require one of the *Carriage Adapter Plate* options. The carriage's threaded stainless steel insert hole pattern exactly matches the base mounting hole pattern on each table, therefore no extra adapter bracket or machining is required. However a precision square tool, or micrometer depth gauge, is required in order to obtain an orthogonality between the two tables of < 30 arc-seconds. The table base, carriage top & carriage sides are all precision machined. *LINTECH's* 100 series, 4 bearing carriage, should be used for the bottom axis in a multiple axes application for better system rigidity, performance, and life.

Dimensions & Specifications

- With Top & Side Cover Plates -

Model Number	Travel Length inches (mm)	Table Dimensions inches (mm)		Mounting Dimensions inches (mm)				Screw Length inches (mm)	Table (1) Weight lbs (kg)
		A	B	C	D	E	M		
10x402-CP2	2 (50)	6.0 (152,4)	9.875 (250,8)	0.500 (12,7)	1.250 (31,7)	1	8	9.25 (235)	6.4 (2,9)
10x404-CP2	4 (100)	8.0 (203,2)	11.875 (301,6)	0.250 (6,3)	2.500 (63,5)	1	8	11.25 (286)	7.3 (3,3)
10x406-CP2	6 (150)	10.0 (254,0)	13.875 (352,4)	1.250 (31,7)	2.500 (63,5)	1	8	13.25 (337)	8.3 (3,8)
10x408-CP2	8 (200)	12.0 (304,8)	15.875 (403,2)	0.250 (6,3)	2.000 (50,8)	3	12	15.25 (387)	9.2 (4,2)
10x412-CP2	12 (300)	16.0 (406,4)	19.875 (504,8)	0.250 (6,3)	1.500 (38,1)	5	16	19.25 (489)	11.1 (5,0)
10x416-CP2	16 (405)	20.0 (508,0)	23.875 (606,4)	1.250 (31,7)	2.500 (63,5)	5	16	23.25 (591)	13.0 (5,9)
10x420-CP2	20 (505)	24.0 (609,6)	27.875 (708,0)	0.750 (19,0)	2.500 (63,5)	7	20	27.25 (692)	14.8 (6,7)
10x424-CP2	24 (605)	28.0 (711,2)	31.875 (809,6)	0.250 (6,3)	2.500 (63,5)	9	24	31.25 (794)	16.8 (7,6)
10x430-CP2	30 (760)	34.0 (863,6)	37.875 (962,0)	0.750 (19,0)	2.500 (63,5)	11	28	37.25 (946)	19.6 (8,9)
10x436-CP2	36 (910)	40.0 (1016,0)	43.875 (1114,4)	1.250 (31,7)	2.500 (63,5)	13	32	43.25 (1099)	22.5 (10,2)
10x442-CP2	42 (1060)	46.0 (1168,4)	49.875 (1266,8)	1.750 (44,4)	2.500 (63,5)	15	36	49.25 (1251)	25.4 (11,5)
10x448-CP2	48 (1215)	52.0 (1320,8)	55.875 (1419,2)	2.250 (57,1)	2.500 (63,5)	17	40	55.25 (1403)	28.2 (12,8)
10x454-CP2	54 (1370)	58.0 (1473,2)	61.875 (1571,6)	0.250 (6,3)	2.500 (63,5)	21	48	61.25 (1556)	31.1 (14,1)
10x460-CP2	60 (1520)	64.0 (1625,6)	67.875 (1724,0)	0.750 (19,0)	2.500 (63,5)	23	52	67.25 (1708)	34.0 (15,4)


- x = 2; Carriage has 2 bearings; Carriage weight = 1.5 lbs. (0,68 kg)
- x = 4; Carriage has 4 bearings; Carriage weight = 1.7 lbs. (0,77 kg)

Footnotes:

(1) Weight shown is with a 0.625 inch (16 mm) diameter screw, a 2 bearing carriage [1.5 lbs (0,68 kg)], a NEMA 23 motor mount [0.34 lbs (0,16 kg)], and a C100 style [0.09 lbs (0,04 kg)] coupling. When using a 0.500 inch diameter screw subtract 0.022 lbs per inch (0,00039 kg per mm) of screw length for a given model number. When using a 4 bearing carriage add 0.2 lbs (0,09 kg) to each value.

Dimensions

- With Top & Side Cover Plates -

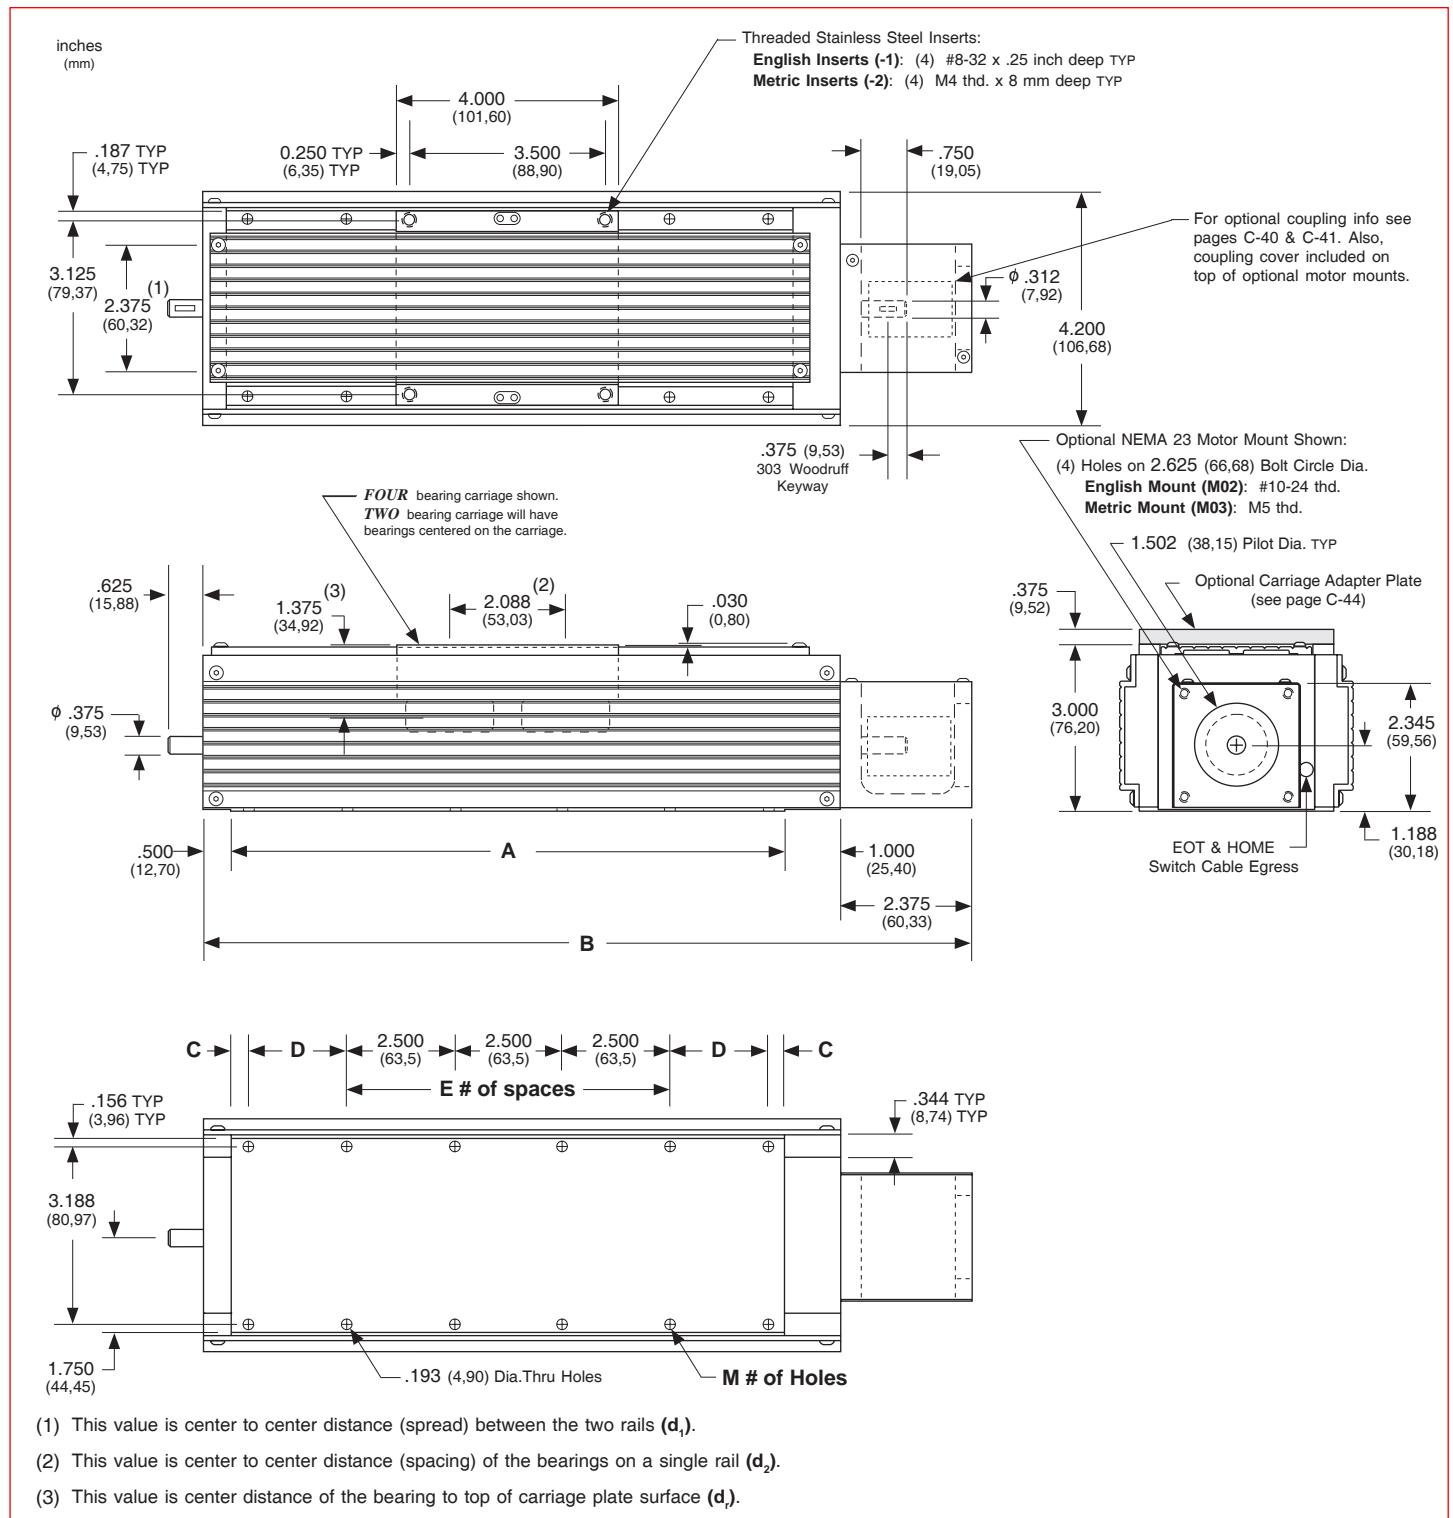

Note: Any 100, 110, 120, or 130 series table can be mounted on top of any second 100, 110, 120 series table by the user, in order to create X-Y multiple axis configurations. The 100-CP1, 100-CP2, or 120 series tables require one of the *Carriage Adapter Plate* options. The carriage's threaded stainless steel insert hole pattern exactly matches the base mounting hole pattern on each table, therefore no extra adapter bracket or machining is required. However a precision square tool, or micrometer depth gauge, is required in order to obtain an orthogonality between the two tables of < 30 arc-seconds. The table base, carriage top & carriage sides are all precision machined. *LINTECH's* 100 series, 4 bearing carriage, should be used for the bottom axis in a multiple axes application for better system rigidity, performance, and life.