## **Temposonics**®

Magnetostrictive, Absolute, Non-contact Linear-Position Sensors



## MH-Series Mobile Hydraulic In-Cylinder Sensor

Model MH CAN Safety (SIL 2)

**Data Sheet** 



#### **FEATURES**

- Linear, Absolute Measurement in Hydraulic Cylinders
- Non-Contact Sensing Technology
- Superior Accuracy,  $< \pm 0.04\%$  F.S.
- Hysteresis < ± 0.1 mm
- Repeatability,  $< \pm 0.005\%$  F.S.
- Compact Design for Embedded Cylinder Applications
- Direct CAN Safety Output: Displacement + Velocity
- Stroke length: 50 mm (2 in.) to 2500 mm (98 in.)
- Voltage input: 12/24 Vdc
- Shock Rating: 100 g (single hit) / IEC 68-2-27
- **■** Vibration Rating 25 g / 10-2000 Hz/IEC 68-2-6
- 200 V/m EMI Immunity

#### **BENEFITS**

- Rugged Mobile Sensor
- SIL2 Safety Integrity Level
- **■** CAN Safety (SIL 2) Output

#### **APPLICATIONS**

- **■** Continuous Operation In Harsh Mobile Conditions
- High Pressure Conditions
- **■** For Welded and Tie-rod Cylinder Applications

#### TYPICAL INDUSTRIES

- **■** Construction
- Agriculture
- Off-highway Machinery

#### **Product overview**

The MH-Series Model MH sensor is designed specifically for mobile hydraulic applications. The MH has proven worldwide performance in a great variety of rugged machines. The MH is designed for durability with shock rating of 100g, vibration rating of 25g, EMI resistance of 200 V/m, and is fully sealed and embedded in hydraulic cylinders. MH CAN Safety sensor design and signal output provides full assurance and durability of the SIL(2) rating.

The Safety Integrity Level (SIL) is a system used to define the safety level of a device [SIL 1 - SIL 4]. The SIL rating is determined based on a number of quantitative and qualitative factors such as development process and safety life cycle management. It is a measurement of performance and potential risk of failure based on the IEC 61508 standard.

The SIL(2) Safe failure fraction (SFF) determines the failure-safety of the system. CAN Safety reaches a level of 95% with a hardware fault to ground of 0. The SIL(2) Probability for Failure per Hour (PFH) is  $\geq$  10–7 to < 10–6 as defined for high demand or continuous modes of operation.

The MH sensor provides absolute position feedback using Temposonics non-contacting technology. This ensures high performance, long operating life, and superior value when implemented in rugged mobile applications.



### MH-Series Model MH CAN Safety (SIL 2) Sensor Product Specifications and Output

## **Product specifications**

Specifications	Parameters	Specifications	
	ENVIRONMENT	ENVIRONMENTAL	
Measured variable:  Coutput:  Direct CAN Safety acc. CiA DS-304  Resolution:  Position: ± 0.10 mm	Operating conditions:	<b>Operating:</b> any orientation, -40 °C (-40 °F) to +105 °C (221 °F) <b>Storage:</b> -30 °C (-22 °F) to +105 °C (221 °F) 90% relative humidity, no condensation	
Velocity: 1 mm/s 50 mm to 2500 mm (2 in. to 98 in.) Measured in 5 mm (0.20 in.) increments	EMC test:	200 V/m ISO 11452-5 ISO 14982: Agriculture and forest machinery IEC 61000-6-1/2 - CE	
50 to 250 mm ≤± 0.1 mm 255 to 2000 mm < ± 0.04% full stroke (minimum ± 0.100 mm 0.003 in.) < ± 0.08% full stroke (for short damping zone) 500 mm ≤± 0.2 mm 750 mm <+ 0.3 mm	Shock rating:	100 g (single hit)/IEC standard 68-2-27 (survivability)	
	vibration rating:	25 g / 10 to 2000 Hz /IEC standard 68-2-6 Sensor rod, 10 mm (0.39 in.): 25 g Sensor rod, 7 mm (0.30 in.): 15 g	
1250 mm ≤± 0.5 mm	WIRING		
± 0.1 mm (0.003 in.)	Connection type:	One 5-pin with the M12x1 connector and flange (provides IP69K environmental protection when installed in a cylinder).	
	ROD STYLE SE		
< 1.5 W	Material:	Sensor rod: Stainless steel 1.4306 / AISI 304L	
500 Vdc (DC ground to machine ground)		Housing: Stainless steel 1.4305 / AISI 303 Mechanical assembly: Flange housing 48 mm (1.89 in.) dia., O-ring 40.87 x 3.53 mm NBR	
Up to -36 Vdc	Sealing:	80, backup ring 42.6 x 48 x 1.4 PTFE  IP67 (IP69k when installed inside a cylinder	
Un to 36 Vdc	Draceure	with M12 x 1 in. connection type)	
•	rating:	Sensor rod, 10 mm (0.39 in.): Operating, 350 bar (5076 psi) Peak, 450 bar (6615 psi) Sensor rod, 7 mm (0.30 in.): Operating, 300 bar (4350 psi) Peak, 400 bar (5800 psi) Pressure pulse test acc.: DIN EN ISO 19879	
	Linear position and velocity  Direct CAN Safety acc. CiA DS-304  Position: ± 0.10 mm  Velocity: 1 mm/s  50 mm to 2500 mm (2 in. to 98 in.)  Measured in 5 mm (0.20 in.) increments  50 to 250 mm ≤± 0.1 mm  255 to 2000 mm <± 0.04% full stroke (minimum ± 0.100 mm 0.003 in.)  < ± 0.08% full stroke (for short damping zone)  500 mm ≤± 0.2 mm  750 mm ≤± 0.3 mm  1250 mm ≤± 0.5 mm  2005 to 2500 mm ≤± 0.8 mm  ± 0.1 mm (0.003 in.)  12/24 Vdc (8-32 Vdc) Voltage supply ripple: <1 % p-p  < 1.5 W	Linear position and velocity  Direct CAN Safety acc. CiA DS-304  Position: ± 0.10 mm  Velocity: 1 mm/s  50 mm to 2500 mm (2 in. to 98 in.)  Measured in 5 mm (0.20 in.) increments  50 to 250 mm ≤± 0.1 mm  255 to 2000 mm <± ± 0.04% full stroke (minimum ± 0.100 mm 0.003 in.)  < ± 0.08% full stroke (for short damping zone) 500 mm ≤± 0.3 mm 1250 mm ≤± 0.5 mm 2005 to 2500 mm ≤± 0.8 mm  ± 0.1 mm (0.003 in.)  12/24 Vdc (8-32 Vdc) Voltage supply ripple: <1 % p-p  < 1.5 W  Material:  500 Vdc (DC ground to machine ground)  Up to -36 Vdc  Pressure	

Magnet type:

Ring magnet (see standard magnet selections)

## **Output options**

The MH-Series Model MH position CAN Safety sensor provides direct CANopen Safety output.



#### **Model MH sensor dimension references**

Model MH, rod-style Sensor Drawing is for reference only, contact applications engineering for tolerance specific information.

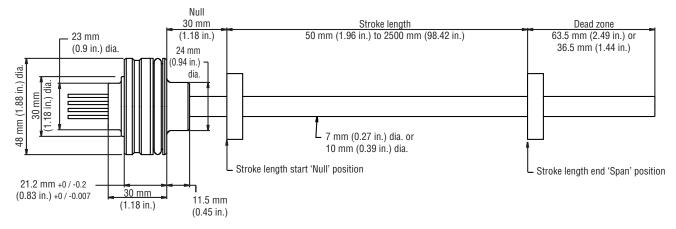


Figure 1. MH-Series Model MH rod-style sensor dimension reference

#### Standard magnet selections (Model MH)

#### SELECTION OF POSITION MAGNETS (MAGNET AND MAGNET SPACER MUST BE ORDERED SEPARATELY)

**MAGNET SPACER** 

Part number 400633

(used with magnet part no.: 201542-2)

A choice of three magnets are available with the Model MH rod-style sensor. Magnets must be ordered separately with Model MH position sensors. The standard ring magnet (part number 201542-2) is suitable for most applications.



STANDARD RING MAGNET

Part number 201542-2

Material: Ferrite PA I.D.: 13.5 mm (0.53 in.) O.D.: 33 mm (1.3 in.) Thickness: 8 mm (0.3 in.) Operating temperature: - 40 °C (-40 °F) to - 105 °C to (221 °F) 01

Material: Non-ferrous Used with ring magnet (part no.: 201542-2) I.D.: 14 mm (0.56 in.) O.D.: 32 mm (1.25 in.) Thickness: 3.2 mm (0.125 in.) RING MAGNET Part number 400533

OI

Material: Ferrite PA
I.D.: 13.5 mm (0.53 in.)
O.D.: 25.4 mm (1 in.)
Thickness: 8 mm (0.3 in.)
Operating temperature:
- 40 °C (-40 °F) to
- 105 °C to (221 °F)

RING MAGNET
Part number 401032



Material: Ferrite PA I.D.: 13.5 mm (0.53 in.) O.D.: 17 mm (0.68 in.) Thickness: 8 mm (0.31 in.) Operating temperature: - 40 °C (-40 °F) to - 105 °C to (221 °F)

sales@electromate.com

## MH-Series Model MH CAN Safety (SIL 2) Sensor Installation

#### Model MH sensor installation references

The robust Temposonics Model MH sensor's new stainless-steel position sensor is designed for direct stroke measurement in mobile hydraulic cylinders. The Temposonics Model MH sensor can be installed from the head side or the rod side of the cylinder depending on the cylinder design.

#### **Installation Notes:**

- 1. Use a non-ferrous circlip to fix the magnet
- 2. The piston rod bore is dependent on hydraulic pressure and piston velocity. Minimum drilling for a (10 mm rod) should be 13.5 mm.
- 3. There should be no less than 3 mm clearance between the end of the sensor rod and the bottom of the rod bore at full retraction .

#### Model MH, rod-style sensor mechanical installation

Drawing is for reference only, contact applications engineering for tolerance specific information.

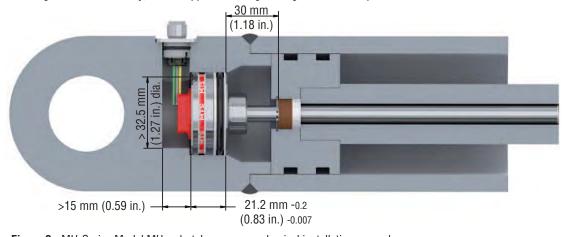



Figure 2. MH-Series Model MH rod-style sensor mechanical installation example

Model MH, rod-style sensor installation Drawings are for reference only, contact applications engineering for tolerance specific information.

Installation methods are possible in magnetic and non-magnetic applications (shown in *Figures 3 and 4*) and are entirely dependent on the cylinder design. While the most common method of installation is from the rod side of the cylinder, installation from the head side of the cylinder is also possible. In both installation methods, the sensor seals the cylinder by using an O-Ring and backup ring which is installed on the sensor housing.

#### Magnetic material installation reference



**Figure 3.** Model MH installation in magnetic material using a non-ferrous magnet spacer.

#### Non-magnetic material installation reference





Figure 4. Model MH installation in non-magnetic material (without using a non-ferrous magnet spacer).

#### Set screw detail



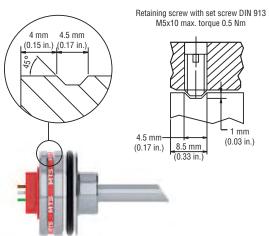

### **Connections and wiring**

#### **CONNECTION TYPE**

The Temposonics® M12 connector system (shown in *Figures 7, 8, 9 and 10*), meets the most stringent protection requirements important for the difficult environmental conditions of mobile hydraulics applications. Protection type IP69K makes the robust metal housing not only completely dust and waterproof, even the harshest cleaning measures cannot damage the sensor.

Model MH, rod-style sensor connector and pin assignments Drawings are for reference only, contact applications engineering for tolerance specific information.


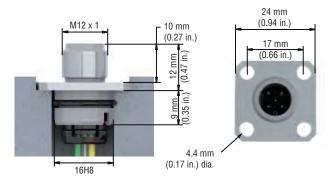


Figure 5. Model MH sensor connection dimensions

#### CAN Pin Assignment





MOUNTING THE CONNECTOR SYSTEM TO THE CYLINDER

**Figure 6.** M12 x 1 connector system pin assignments



**Figure 7.** The MH sensor is delivered by MTS together with the new connector system: The connector insert carrier is already connected to the sensor electronics, i.e. no soldering, any color or connection mistake.



**Figure 8.** The connector insert is taken out of the cylinder through a bore hole. The flange housing can be snapped into position easily from outside.



**Figure 9.** Four standard screws must be tightened to mount the connector system on the cylinder.



Figure 10. With a corresponding mating molded plug the connector system fulfills a ingress rating of IP69K.



# MH-Series Model MH CAN Safety (SIL 2) Sensor Ordering Information

## **MH-Series Model MH ordering information**

Use the table below to configure your sensor part number.	
M H	
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16	17 18 19
SENSOR MODEL  MH = Rod-style with pressure fit flange housing 48 mm (1.88 in.) dia.	M H 1-2
SENSOR STYLES	3
E = Rod-style 10 mm (0.39 in.) dia. reduced damping zone 63.5 mm (2.49 in.)  STROKE LENGTH (ORDER LENGTH) = = = = = = = = = = = = = = = = = = =	M 4-8
CONNECTION TYPE =	9-12
Integral 'single wires', each conductor: 0.5 mm² (20 AWG)  Termination type:  N _ A = no termination  N _ F = 4 single wires, M12x1 IP69K, 5 pin (pin assignment 2-3-4-5), see fig 6 on page 5.  Wire length:  06 = 60 mm (2.36 in.) min. wire length  25 = 250 mm (9.84 in.) max. wire length  Cable exit:  4 conductor/ cable integral PUR cable, pigtailed. Cable length (first digit x 1m, second digit x 0.1 m).  10 = 1.0 m length (standard all other lengths require minimum order quantities: 0.5 m min. to 9.9 max.: 0.1 m increments).  Termination type:	
A = Pigtail (stripped conductors) Contact factory for termination  INPUT VOLTAGE — =	3 13
3 = +12/24 Vdc  OUTPUT =	14-19
\$00	

sales@electromate.com


## Magnet selections and optional Test kit

Magnet selections and the MH-Series CAN test kit part no.: 253879, must be ordered separately. Refer to the tables below for ordering information.

Magnet selections	Part no.
Ring magnet, O.D. 17.4 mm (0.68 in.)	401032
Ring magnet, O.D. 25.4 mm (0.99 in.)	400533
Ring magnet, O.D. 33 mm (1.29 in.)	201542-2
Non-ferrous magnet spacer‡	400633

**<sup>‡</sup>** Used with ring magnet part no.: 201542-2

Optional accessory	Part no.
MH-Series CAN test kit	
The MH-Series CAN Test kit includes:  • MH-Series CANopen / J1939 Test software	
installation CD	
USB CAN module kit	
- USB CAN module	050070
- USB CAN Module utility CD	253879
- USB connector cable	
<ul> <li>12 Vdc battery charger with adapter</li> </ul>	
<ul> <li>Cable with M12x1 and RS232 connectors</li> </ul>	
Cable with core cable ends and RS232 connector	
Carrying case	
<ul> <li>User's guide (PDF format)</li> </ul>	

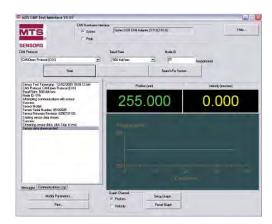

MH-Series CAN test kit software interface