

ROBO Cylinder Mini-Gripper Cleanroom Type RCP2CR-GRSS/GRLS ROBO Cylinder Mini-Gripper Dustproof type RCP2W-GRSS/GRLS



Features

Cleanroom specification

The cleanroom specification means air is extracted from inside the body of the actuator to give it a cleanroom class rating of 10 (0.1 μ m).

Small and lightweight, High-torque, Long strokes

Small, lightweight actuator, 42mm-wide, 71mm-high, weighing 200g with a 14N maximum grip strength, and 8mm open/close stroke specifications.

Two settings: Slider type and lever type

A two-type lineup features a guide-equipped slider type with excellent rigidity and a lever type whose lever can be opened and closed 180 degrees.

Dustproof Specification

The dustproof specification eliminates the suction coupling of the clean specification and enables use in dusty adverse environments with IP50-equivalent dustproofing. There is no splash-proof function.

Multi-point positioning and adjustable grip strength Servo-controlled positioning for up to 1,500 points and a capability to make fine adjustments to the grip as needed.



Model

Туре	Layout	Model	
Cleanroom Type	Slider Type	RCP2CR-GRSS-I-20P-30-8-P1-□	
	Lever Type	RCP2CR-GRLS-I-20P-30-180-P1-	
Dustproof Type	Slider Type	RCP2W-GRSS-I-20P-30-8-P1-□	
	Lever Type	RCP2W-GRLS-I-20P-30-180-P1-	

Specification

Item	Cleanroom Type		Dustproof Type		
Туре	Slider Type	Lever Type	Slider Type	Lever Type	
Model	RCP2CR-GRSS	RCP2CR-GRLS	RCP2W-GRSS	RCP2W-GRLS	
Open/Close Stroke	8 (4 per side) mm	180 (90 per side) degrees	8 (4 per side) mm	180 (90 per side) degrees	
Maximum gripping force	14.0N	6.4N	14.0N	6.4N	
Maximum Open/Close Speed	78 (per side) mm/s	600 (per side) deg/sec	78 (per side) mm/s	600 (per side) deg/sec	
Positioning Repeatability	±0.01mm	±0.01 degrees	±0.01mm	±0.01 degrees	
Static Allowable Moment (N·m)	Ma: 0.5 Mb: 0.5 Mc: 1.5		Ma:0.5 Mb:0.5 Mc:1.5		
Cleanliness	Class 10 (0.1µm)		_		
Suction Tube Coupling	One-touch tube coupling, Suitable tube outer diameter φ4		_		
Suction Volume	10NI/min		_		
Actuator Unit Weight	0.2kg				
Compatible Controllers	PCON/PSEL/RPCON(ROBONET)				

External Dimensions


[Cleanroom Slider Type]

(Model RCP2CR-GRSS-I-20P-30-8-P1)

[Dustproof Slider Type]

(Model RCP2W-GRSS-I-20P-30-8-P1)

 $\ensuremath{^*}$ Dust proof type is not equipped with an air suction coupling.

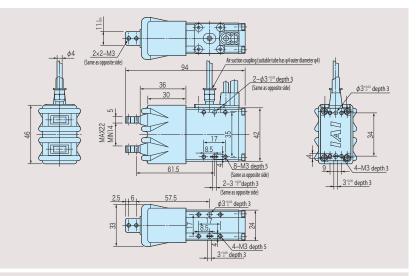

[Cleanroom Lever Type]

(Model RCP2CR-GRLS-I-20P-30-180-P1)

[Dustproof Lever Type]

(Model RCP2W-GRLS-I-20P-30-180-P1)

* Dustproof type is not equipped with an air suction coupling.

